

Code: ATT-4

VIDEO BALUN ATT-4

Net: 26.23 EUR Gross: 26.23 EUR

The ATT-4 is designed to signal transmission via twisted-pair cable for longer distance, ensuring signal transmission up to 2000 meters. It is important to pay attention to linking the adequate terminals: (+) and (-).



SPECIFICATION

Standard:	• CVBS - PAL, NTSC
Device type:	Active / Transmitter
Power supply:	12 V / 80 mA
Number of channels:	4
Signal distance range:	max. 2000 m
Video bandwidth:	0 ... 9 MHz (-3 dB)
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
LED indicators:	green LED - video signal detection red LED - power on
Coaxial socket type:	4 x BNC Straight socket
Symmetrical socket type:	RJ-45 (8-pin, 4 pairs) Socket / Cable terminals
Operation temp:	0 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.410 kg
Dimensions:	200 x 38 x 70 mm
The distance switch (LEVEL) settings cause the initial signal correction:	• L 400 ... 1200 m • M 1200 ... 1800 m • H > 1800 m
Guarantee:	2 years


PRESENTATION

Top view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connection diagram:

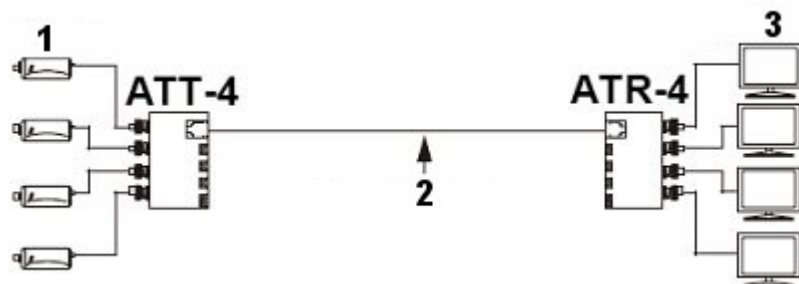

- 1) Cameras
- 2) Twisted-pair cable
- 3) Monitors

Wiring sequence inside the RJ-45 plug:

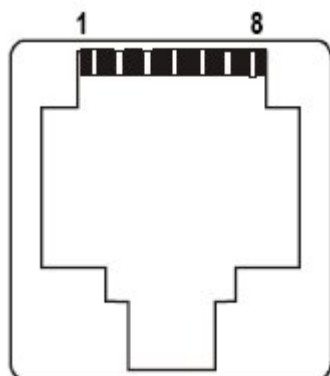

- 1) white/orange
(+)Video 1
- 2) orange
(-)Video 1
- 3) white/green
(+)Video 2
- 4) Blue
(-)Video 3
- 5) white/blue
(+)Video 3
- 6) green
(-)Video 2
- 7) white/brown
(+)Video 4
- 8) brown
(-)Video 4

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------