

Code: DS-2AE4223T-A

HD-TVI, PAL SPEED DOME CAMERA OUTDOOR **DS-2AE4223T-A** - 1080p 4.0 ... 92 mm Hikvision

Net: **363.87 EUR** Gross: **363.87 EUR**

Megapixel camera with 1/2.8" CMOS sensor and HD-TVI (High Definition Transport Video Interface) / PAL.

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to 1080p. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Attention! The camera hasn't got an IR illuminator.



SPECIFICATION

Standard:	HD-TVI, PAL
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 960 x 576 - PAL
Min. illumination:	0.05 Lux (color) / F1.4 , 0.005 Lux (B/W) / F1.4
Lens:	4.0 ... 92 mm
View angle:	49 ° ... 2.2 ° (manufacturer data) 55 ° ... 3.9 ° (our tests result)
Optical zoom:	x 23
Digital zoom:	x 16
Rotation speed depending on ZOOM level:	✓
Horizontal rotation range:	360 ° continuous
Vertical rotation range:	0 ° ... 90 °
Rotation speed (manual control):	0.1 °/s ... 160 °/s (horizontal) , 0.1 °/s ... 120 °/s (vertical)
PTZ control:	<ul style="list-style-type: none">• The ability to control via coaxial cable from recorder HIKVISION• Via interface RS-485

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Protocols:	Pelco-D, Pelco-P
S/N ratio:	> 50 dB
Video output:	<ul style="list-style-type: none"> • 1 Vpp / 75 Ω, HD-TVI • 1 Vpp / 75 Ω, CVBS - PAL
Alarm inputs / outputs:	2 / 1
Number of presets:	256
Route settings:	8
Horizontal scan:	✓
Park action:	Call the set function (tour, scan, etc.) after specified dwell time
Main features:	<ul style="list-style-type: none"> • 3D-DNR - Digital Noise Reduction • D-WDR - Wide Dynamic Range • EIS - Electronic Image Stabilization • Intelligent 3D Positioning System • ICR - Movable InfraRed filter • Privacy zones • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Auto White Balance
OSD menu:	✓
Vandal-proof:	—
"Index of Protection":	IP66
Power supply:	24 V AC
Power consumption:	≤ 18 W
Housing:	Speed Dome, Metal / Plastic
Color:	White / Black
Operation temp:	-30 °C ... 65 °C
Weight:	2.1 kg
Dimensions:	Ø 185 x 330 mm
Supported languages:	English
Manufacturer / Brand:	Hikvision
SAP Code:	301204306
Guarantee:	3 years

PRESENTATION


Bottom view:




Bottom view (configuration switches visible):



Camera connectors:

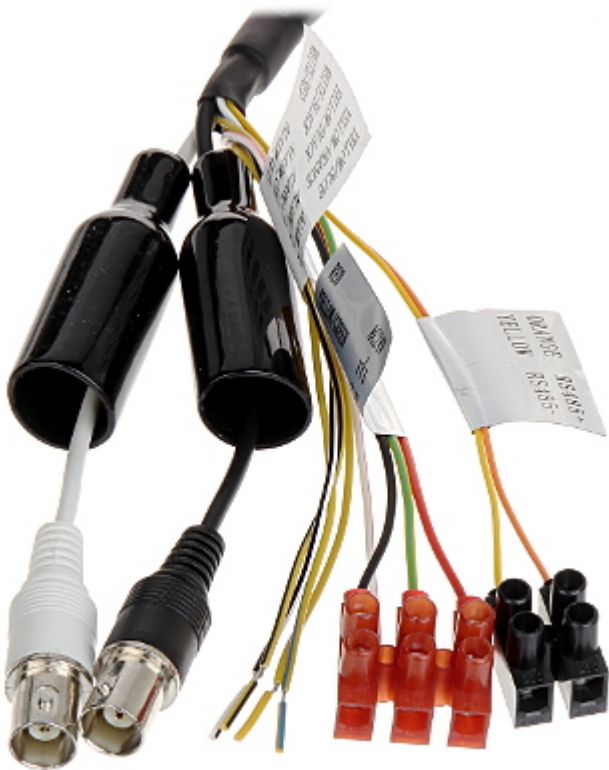

Connectors description:

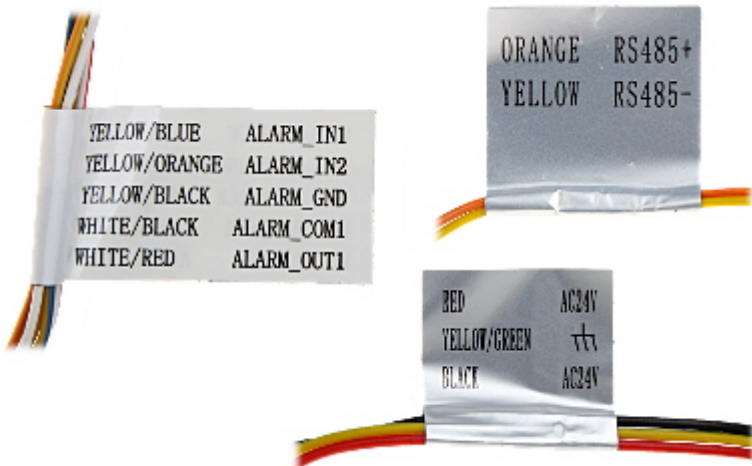

In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with external IR illuminator on:



Camera image at direct strong light opposite to camera:

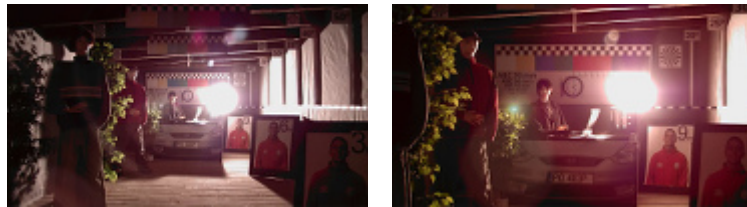

Camera image at night conditions, at different illumination values show below:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------