

Code: DH-PFS6428-24T

INDUSTRIAL SWITCH **DH-PFS6428-24T** 24-PORT + 4 x SFP DAHUA

Net: **7 581.00 PLN** Gross: **7 581.00 PLN**

The DH-PFS6428-24T switch is designed for large streams of video data in the CCTV IP surveillance networks. Designed to continuous operation 24/7. The switch has been equipped with two independent power supply adapters. In case of failure of one of the power adapter, it is possible to immediately connect the other one and replace the damaged module.



SPECIFICATION

LAN ports:	24 x RJ45 - 10/100/1000 Base-T
Transmission speed:	<ul style="list-style-type: none">• 10 / 100 / 1000 Mbps - 24 LAN ports,• 1 / 10 Gb/s - 4 SFP+ ports
Management:	✓
MAC addresses table:	32k
Main features:	<ul style="list-style-type: none">• Switch is managed via a web browser, command line interface and SNMP, RMON protocols• Auto update of MAC addresses table• CoS/DSCP priority based on IEEE 802.1p standard• Queue scheduling: SP, WRR, SP+WRR• I/O stream rate management on port level• IEEE 802.1Q VLAN, Port Based VLAN, MAC Based VLAN, Private VLAN support• IEEE 802.1Q standard support, up to 512 VLAN groups and 4K VIDs• IGMP Snooping V1/V2/V3• Spanning Tree STP/RSTP/MSTP• BPDU Filtering/Guard• Data Flow Control (802.3x)• protection against lightning discharges and voltage differences and strokes between devices• The switch has been equipped with two independent power supply adapters - In case of failure of one of the power adapter, it is possible to immediately connect the other one and replace the damaged module
Certificates:	CE, RoHS
Power supply:	230 V AC
Power consumption:	≤ 50 W
Operation temp:	0 °C ... 40 °C
Weight:	4.41 kg
Dimensions:	440 x 290 x 44 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Mounting side view:



In case of failure of one of the power adapter, it is possible to immediately connect the other one and replace the damaged module:



In the kit:

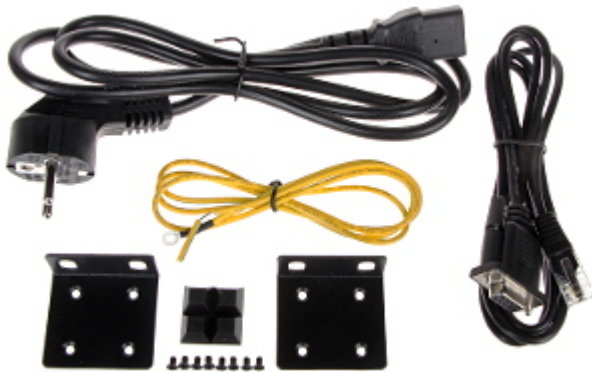

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

