

Code: GTS-C1-06-4G2G

## SWITCH POE **GTS-C1-06-4G2G** 4-PORT

Net: **76.90 EUR** Gross: **76.90 EUR**

Due to the reliability and ensuring high quality of transmission, the GTS-C1-06-4G2G 4-port PoE switch is an ideal solution for applications in CCTV IP installations. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

**Attention!** When the VLAN function is enabled the PoE range increases up to 250m and the transmission speed reduces to 10 Mb/s.




### SPECIFICATION

LAN ports:	6 x RJ45 ( 4 x PoE (802.3af/at) )
Management:	—
LED diodes:	Power, LAN, PoE, VLAN, Reset
Transmission speed:	<ul style="list-style-type: none"><li>• 10 / 100 / 1000 Mbps : 2 x Port LAN</li><li>• 10 / 100 / 1000 Mbps : 4 x LAN &amp; PoE ports</li></ul>
Maximal output power:	30 W / port PoE
Maximal total power:	60 W
MAC addresses table:	1k
Main features:	<ul style="list-style-type: none"><li>• RESET button</li><li>• 2 x Port Uplink</li><li>• IEEE 802.1Q VLAN - Turning by switch</li><li>• Range PoE : 250 m - VLAN mode</li></ul>
Certificates:	CE
Power supply:	48 ... 56 V DC / 1.25 A (power adapter included)
Operation temp:	0 °C ... 55 °C
Weight:	0.38 kg
Dimensions:	160 x 95 x 28 mm
Guarantee:	2 years

### PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

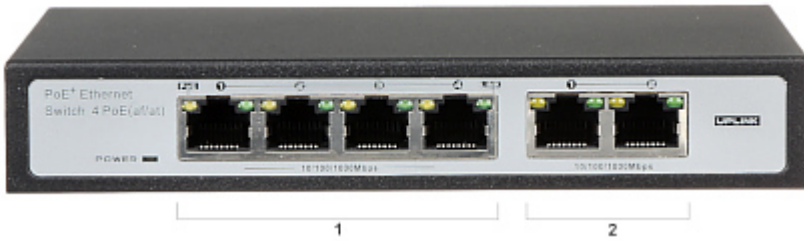

1. LAN + PoE

2. LAN

Rear view:



In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

