


Code: DS-PM1-I1-WE

WIRELESS INPUT EXPANDER **DS-PM1-I1-WE** AX PRO Hikvision

The DS-PM1-I1-WE expander allows you to connect the wired detector to the HIKVISION AX PRO wireless system. The device can also function as a zone input. Additional functionality is provided by a separate TAMPER input and an additional programmable input/output. In addition, the expander is equipped with the option of powering the wired detector with 3V DC voltage and a built-in accelerometer designed to detect device tampering.

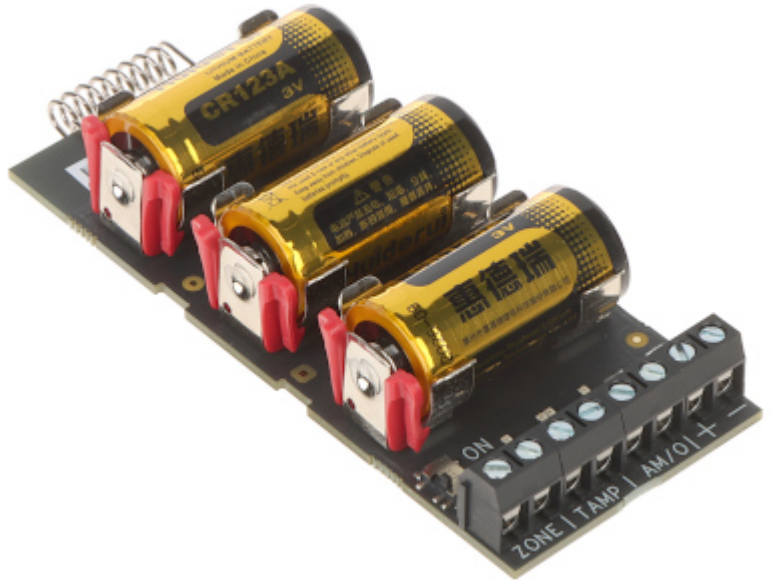

Support:	Wireless alarm systems HIKVISION AX PRO
Operation:	1 pcs - alarm input 1 pcs - TAMPER input 1 pcs - anti-mask input / Alarm output
Frequency band:	868 MHz
Radio communication range (at open area):	1700 m @ ≤ 10 kbps
Tamper output:	Tampering detection - detection of device position change using the accelerometer
Power supply:	3 x Battery : CR123A 3 V (included)
Main features:	<ul style="list-style-type: none"> • Power output 3.3 V DC / 10 mA - possibility of powering the active detector • Bi-directional encrypted radio communication • AES-128 data encryption • Intelligent jamming detection • Operation status LED indicator : Red / Green
Operation temp:	-10 °C ... 55 °C
Weight:	0.08 kg
Dimensions:	102 x 41 x 23 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302401879
Guarantee:	2 years