

Code: S-64H

SWITCH POE **S-64H** 4-PORT PULSAR

Net: **107.25 EUR** Gross: **107.25 EUR**

The S-64H switch is designed to supply IP cameras operating in the IEEE 802.3af/at standard. The device with the power supply adapter is enclosed in a housing with IP56 protection class. Four ports support Power over Ethernet (PoE) function.



SPECIFICATION

LAN ports:	• 4 x RJ45 10/100 Base-TX - PoE (802.3af/at), • 2 x RJ45 10/100 Base-TX - Uplink ports
Management:	—
Transmission speed:	• 10 / 100 Mbps - 4 LAN & PoE ports, • 10 / 100 Mbps - 2 Uplink ports
Maximal output power:	30 W / port PoE
Maximal total power:	60 W
MAC addresses table:	1k
Operation modes:	• Extend On : 250 m, 10 Mbps @ UTP cat. 5e, 6 • Extend Off : 100 m, 100 Mbps @ UTP cat. 5e, 6
Main features:	There are cable glands in the housing : • 6 pcs Ø 4 ... 8 mm • 1 pcs Ø 10 ... 14 mm
Certificates:	CE
Power supply:	52 V DC / 1.15 A (power adapter included)
Housing:	Plastic, IP56
Weight:	1.25 kg
Dimensions:	148 x 240 x 80 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


PRESENTATION

Bottom view:



Internal view:




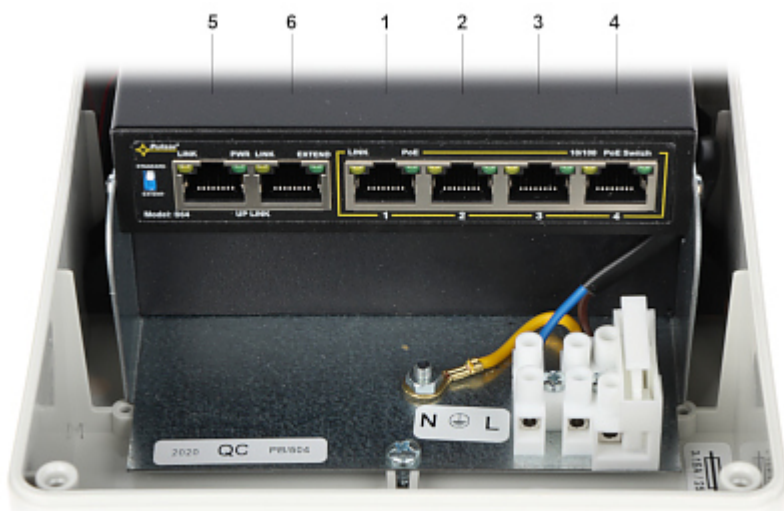

- 1 - LAN + PoE
 - 2 - LAN + PoE
 - 3 - LAN + PoE
 - 4 - LAN + PoE
 - 5 - Port Uplink
 - 6 - Port Uplink
- Top view:



Examples of connection diagrams:

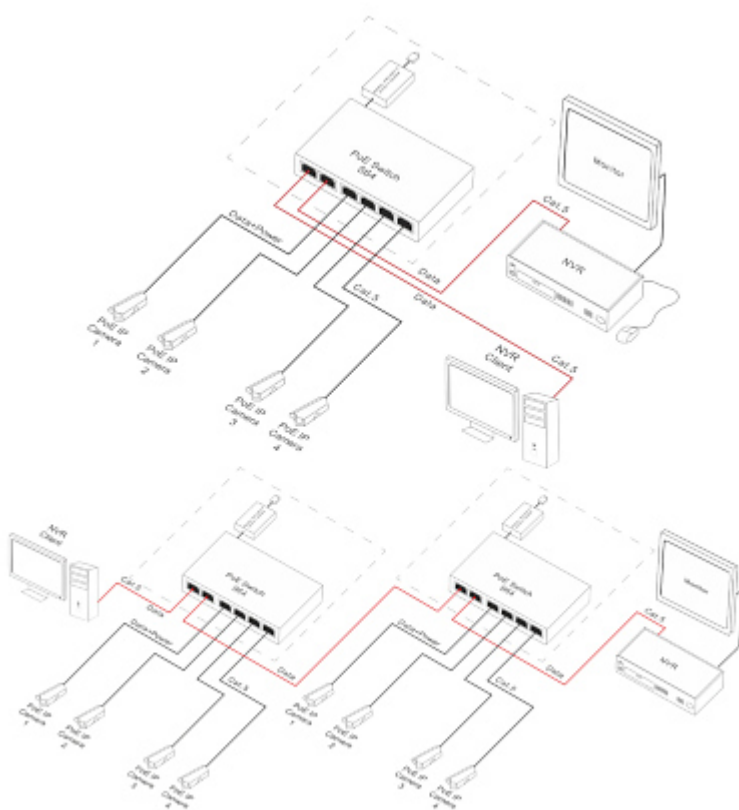

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------