

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP66 Index of Protection norm.

Attention! The change of the standard using presets: 2 x 137 -> AHD, 2 x 138 -> TVI, 2 x 139 -> CVI, 2 x 140 -> CVBS. 2 x 102 preset -> enter to another OSD submenu, where we can change, among others, the standard (AHD/CVI/TVI/CVBS).



Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	1/2.7 " Sony CMOS IMX323
Digital Image Processor:	Nextchip NVP2441H
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 px - 1080p 960 x 576 px - 960H
Range of IR illumination:	50 m
Lens:	5.13 ... 46.3 mm
View angle:	<ul style="list-style-type: none"> • 55 ° ... 6.6 ° (manufacturer data) • 54 ° ... 6.7 ° (our tests result)
Optical zoom:	x 10
Digital zoom:	x 16
Rotation speed depending on ZOOM level:	✓
Auto IR illuminator:	✓
Horizontal rotation range:	360 ° continuous
Vertical rotation range:	-3 ° ... 90 °
Rotation speed (manual control):	0.1 °/s ... 200 °/s (horizontal) , 0.1 °/s ... 50 °/s (vertical)



User Manual

Code: PORTA-4H-1010

AHD, HD-CVI, HD-TVI, PAL SPEED DOME CAMERA OUTDOOR **PORTA-4H-1010** - 1080p 5.13 ...
46.3 mm

Preset rotation speed:	200 °/s (horizontal) 60 °/s (vertical)
PTZ control:	Via interface RS-485
Protocols:	Pelco-D, Pelco-P (auto detection)
S/N ratio:	> 55 dB
Video output:	AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp 75 Ω
Audio:	—
Number of presets:	220
Route settings:	3
Horizontal scan:	✓
Park action:	Call the set function (tour, scan, etc.) after specified dwell time
Alarm inputs / outputs:	—
Main features:	<ul style="list-style-type: none">• 2D-DNR, 3D-DNR - Digital Noise Reduction• ICR - Movable InfraRed filter• BLC/HLC - Back Light / High Light Compensation• Auto White Balance• AGC - Automatic Gain Control• Configurable Privacy Zones• Motion Detection• Auto restore to previous PTZ and lens status after power failure• Sense-UP - (Slow Shutter) - Increase the sensor sensitivity• F-DNR (Defog) - Reduction of image noise caused by precipitation• D-WDR - Wide Dynamic Range• Sharpness - sharper image outlines
OSD menu:	✓
Power supply:	12 V DC / 3 A (power adapter included)
Power consumption:	≤ 28 W
Housing:	Speed Dome, Aluminum
Color:	White
"Index of Protection":	IP66
Vandal-proof:	—
Operation temp:	-40 °C ... 60 °C
Weight:	2.15 kg (with bracket)
Dimensions:	245 x 153 x 230 mm (with bracket)
Supported languages:	English
Guarantee:	2 years


Small dimensions camera:



Bottom view:



Camera mounting side view:

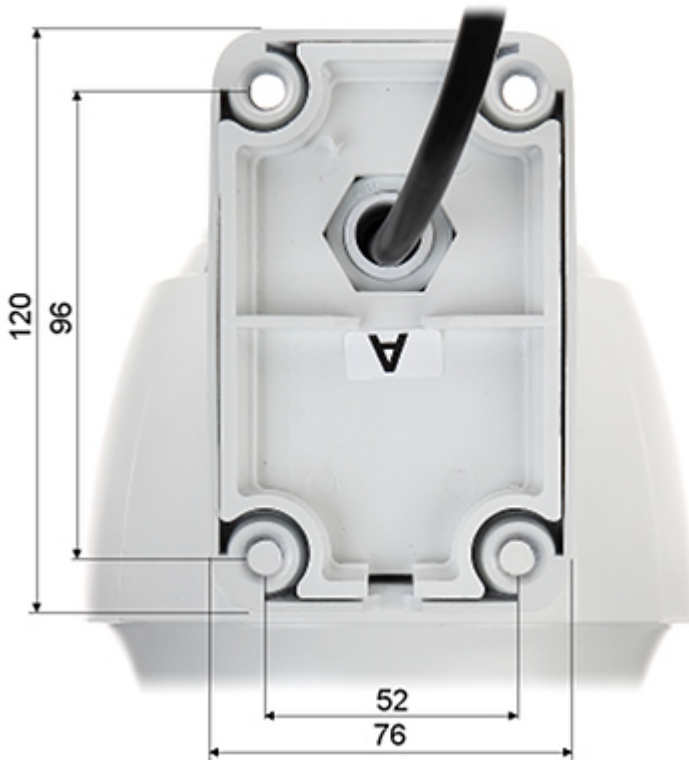

Camera connectors:



In the kit:

