

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Megapixel camera with 1/2.8" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP66 Index of Protection norm. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.



Standard:	HD-CVI, PAL
Sensor:	1/2.8 " STARVIS™ CMOS
Matrix size:	2.0 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H
Range of IR illumination:	150 m
IR illuminator power adjustment:	Automatic
Lens:	4.5 ... 135 mm
View angle:	<ul style="list-style-type: none"> • 68 ° ... 2.4 ° (manufacturer data) • 60 ° ... 2.9 ° (our tests result)
Optical zoom:	x 30
Digital zoom:	x 16
Rotation speed depending on ZOOM level:	✓
Auto IR illuminator:	Adaptive adjusting of the IR illuminator power to the lens zoom and outdoor light conditions
Horizontal rotation range:	360 ° continuous
Vertical rotation range:	-15 ° ... 90 °



User Manual

Code: SD59230I-HC

HD-CVI, PAL SPEED DOME CAMERA OUTDOOR **SD59230I-HC** - 1080p 4.5 ... 135 mm DAHUA

Rotation speed (manual control):	0.1 °/s ... 200 °/s (horizontal) , 0.1 °/s ... 300 °/s (vertical)
Preset rotation speed:	400 °/s (horizontal) , 300 °/s (vertical)
PTZ control:	Via interface RS-485 The ability to control via coaxial cable from recorder DAHUA, BCS, RAPID
Protocols:	Pelco-D, Pelco-P, DH-SD (auto detection)
S/N ratio:	> 55 dB
Video output:	HD-CVI, PAL, 1 Vpp 75 Ω
Audio:	External microphone input
Number of presets:	300
Route settings:	8
Horizontal scan:	✓
Park action:	Call the set function (tour, scan, etc.) after specified dwell time
Alarm inputs / outputs:	2 / 1
Main features:	<ul style="list-style-type: none">• ICR - Movable InfraRed filter• 2D-DNR, 3D-DNR - Digital Noise Reduction• WDR - 120 dB - Wide Dynamic Range• IR illuminator optimization• BLC/HLC - Back Light / High Light Compensation• Auto White Balance• 24 Configurable Privacy Zones
OSD menu:	✓
"Index of Protection":	IP66
Power supply:	24 V AC / 3000 mA (power adapter included)
Housing:	Speed Dome, Metal
Color:	White + Black
Operation temp:	-40 °C ... 70 °C
Weight:	4.49 kg (with bracket)
Dimensions:	305 x 450 x 186 mm (with bracket)
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years


Bottom view:



On the body, under the cover there are placed configuration switches:



Bracket dimensions:

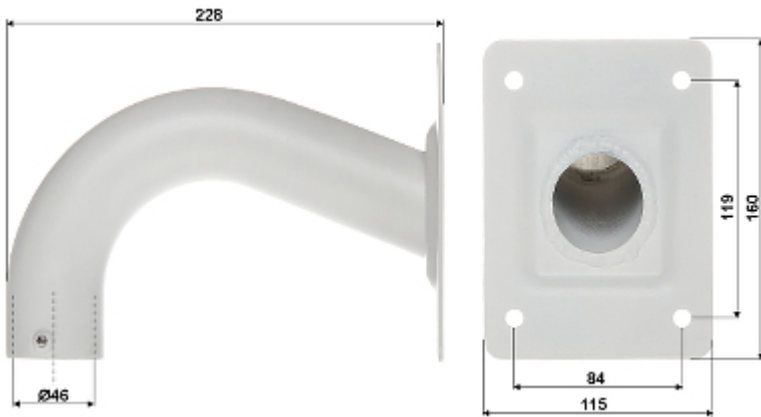

Camera connectors:



Connectors description:



In the kit:

