

Code: SG1006P

## SWITCH POE **SG1006P** 4-PORT DAHUA

Net: **38.54 EUR** Gross: **38.54 EUR**

Due to reliability and ensuring high quality of transmission, the SG1006P 10/100/1000 Mb/s 4-port PoE desktop type switch is perfect solution for expanding home or office network. Four ports support Power over Ethernet (PoE) function.



### SPECIFICATION


|                       |                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN ports:            | <ul style="list-style-type: none"><li>• 4 x RJ45 10/100/1000 Base-T ( 1 x Hi-PoE + 3 x PoE (802.3af/at) ),</li><li>• 2 x RJ45 10/100/1000 Base-T - Uplink</li></ul>                                                                                                                                                                                                                    |
| Management:           | —                                                                                                                                                                                                                                                                                                                                                                                      |
| LED diodes:           | Power, PoE, Link/Act                                                                                                                                                                                                                                                                                                                                                                   |
| Transmission speed:   | 10 / 100 / 1000 Mbps : 4 LAN & PoE ports + 2 Uplink ports                                                                                                                                                                                                                                                                                                                              |
| Maximal output power: | <ul style="list-style-type: none"><li>• 60 W / port Hi-PoE - Port 1</li><li>• 30 W / port PoE 802.3af/at - 2 ... 4 ports</li></ul>                                                                                                                                                                                                                                                     |
| Maximal total power:  | 60 W                                                                                                                                                                                                                                                                                                                                                                                   |
| MAC addresses table:  | 2k                                                                                                                                                                                                                                                                                                                                                                                     |
| Operation modes:      | Extend On : 250 m, 10 Mbps @ UTP cat. 5e, 6                                                                                                                                                                                                                                                                                                                                            |
| Main features:        | <ul style="list-style-type: none"><li>• PoE power mode : The device supports 8-pin power supply</li><li>• Intelligent management of Power Supply Unit power's output stage</li><li>• protection against lightning discharges and voltage differences and strokes between devices</li><li>• Watchdog PoE</li><li>• Kensington Lock</li><li>• Possibility to mount to the wall</li></ul> |
| Certificates:         | CE                                                                                                                                                                                                                                                                                                                                                                                     |
| Protections:          | <ul style="list-style-type: none"><li>• Protection against lightning discharges (common/differential) : 4 / 2 kV</li><li>• Protection against electrostatic discharge - Contact/Air (ESD/EMP) : 6 / 8 kV</li></ul>                                                                                                                                                                     |
| Housing:              | Desktop, Metal                                                                                                                                                                                                                                                                                                                                                                         |
| Power supply:         | 53 V DC / 1.22 A (power adapter included)                                                                                                                                                                                                                                                                                                                                              |
| Operation temp:       | -10 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                                                       |
| Weight:               | 0.29 kg                                                                                                                                                                                                                                                                                                                                                                                |
| Dimensions:           | 130 x 85 x 26 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Manufacturer / Brand: | DAHUA                                                                                                                                                                                                                                                                                                                                                                                  |
| Guarantee:            | <b>3 years</b>                                                                                                                                                                                                                                                                                                                                                                         |

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Front view:

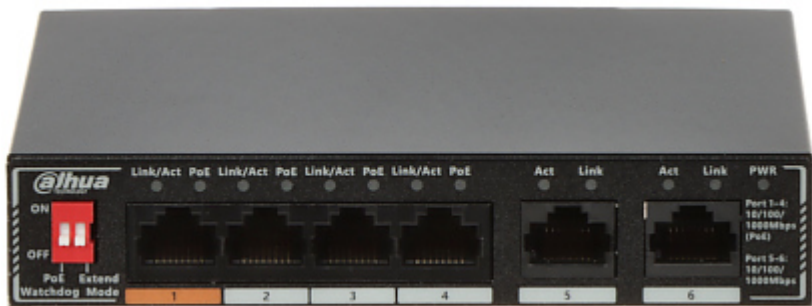

- 1 - LAN + Hi-PoE
  - 2 - LAN + PoE
  - 3 - LAN + PoE
  - 4 - LAN + PoE
  - 5 - Uplink
  - 6 - Uplink
- Rear view:



In the kit:

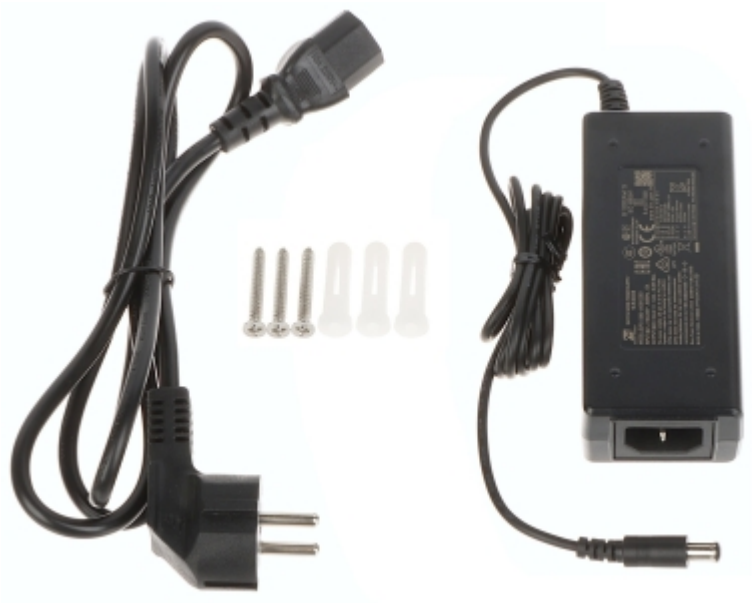

**PACKAGE**

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|