

Code: U-124P-4POE-20

INDUSTRIAL POE SWITCH **U-124P-4POE-20** 4-PORT +2xFO

Net: **169.81 EUR** Gross: **169.81 EUR**

The U-124P-4POE-20 PoE Switch is an industrial type device enabling fluent network transmission at rates 10 / 100 Mbps. All ports support PoE function in 802.3af standard with automatic detection of co-operating devices. Devices of this type can be used in installations realized in industrial facilities in harsh environmental conditions like high or low temperature.

The switch is equipped with 2 fiber optic ports enabling signal transmission up to 20 km distance.



SPECIFICATION

LAN ports:	<ul style="list-style-type: none">• 4 x RJ45 (4 PoE (802.3af)),• 2 x FO - SC optical fiber port, Single-mode
Management:	—
Transmission speed:	<ul style="list-style-type: none">• 10 / 100 Mbps - 4 LAN & PoE ports• 10 / 100 Mbps - 2 x SC optical output
Maximal output power:	15.4 W / port PoE
Maximal total power:	62 W
Transmission method:	Store and Forward
Main features:	<ul style="list-style-type: none">• DIN, TS-35 rail mounting• Auto-learning and Auto-aging functions support for MAC addresses• "Index of Protection" IP40• Operation temp : -40 °C ... 80 °C• Permissible relative humidity 95 %• Optical transmission requires 2 optical fibers
LED diodes:	Power, Link/Act, PoE, F1 / F2
Certificates:	CE
Power supply:	The ability to connect two power adapters - redundant power supply <ul style="list-style-type: none">• 12 V ... 48 V DC• 24 V AC
Weight:	0.755 kg
Dimensions:	149 x 120 x 40 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front panel:



Top view:



Rear panel (DIN rail installation):




Side view:



Example of application:



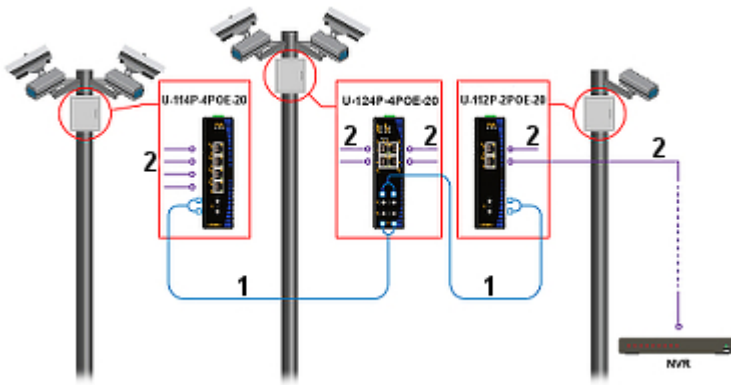

1. Fiber optic
 2. Twisted-pair cable
- In the kit:



OUR OPINIONS



- o PoE does not work at 24V AC and 12V DC.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

