

Code: DS-3E0326P-E/M(C)

SWITCH POE **DS-3E0326P-E/M(C)** 24-PORT SFP Hikvision

Net: **242.06 EUR** Gross: **242.06 EUR**

The DS-3E0326P-E/M(C) switch is designed for large streams of video data in the CCTV IP surveillance networks.

Attention! The SFP port requires the SFP module, which is available in our offer.



SPECIFICATION

LAN ports:	• 24 x RJ45 10/100 Base-T (24 x PoE (802.3af/at)), • 1 x port Combo: SFP (1000 Base-X) / RJ45 (10/100/1000 Base-T) - Uplink, • 1 x RJ45 10/100/1000 Base-T - Uplink
Transmission speed:	• 10 / 100 Mbps - 24 LAN & PoE ports, • 1000 Mbps - Combo: RJ45/SFP - Uplink, • 10 / 100 / 1000 Mbps - RJ45 (Uplink)
Maximal output power:	30 W / port PoE
Maximal total power:	230 W
MAC addresses table:	8k
Management:	—
Operation modes:	• Extend - 17 ... 24 ports : 300 m, 10 Mbps @ UTP cat. 5e, 6 • Port Isolation - 1 ... 24 ports • Watchdog PoE - 1 ... 24 ports
LED diodes:	Power, Link/Act, PoE, PoE Max, G1/G1-F, G2
Main features:	• High priority ports : 1 ... 8 ports - Dedicated to video transmission • Intelligent PoE power management - the device controls power consumption on individual ports • PoE power mode : The device supports 8-pin power supply - wires 1-2(-), 3-6(+), 4-5(+), 7-8(-) • Port isolation • Watchdog function • Possibility to mount to the wall • Can be mounted in a Rack 19" cabinet
Certificates:	CE, RoHS, FCC, WEEE, REACH
Protections:	Overvoltage 6 kV
Housing:	Metal, Desktop
Power supply:	100 ... 240 V AC, 50 / 60 Hz
Power consumption:	max. 250 W
Operation temp:	0 °C ... 45 °C
Weight:	2.3 kg
Dimensions:	335 x 226 x 45 mm
Manufacturer / Brand:	Hikvision


SAP Code:	301802544
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:

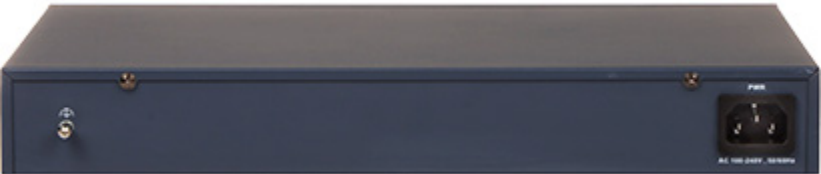

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------