

Code: DS-3WF03C-D

ACCESS POINT + Customer Premises Equipment **DS-3WF03C-D** Hikvision

Net: **273.39 EUR** Gross: **273.39 EUR**



The DS-3WF03C-D set of devices allows for quick and convenient configuration of the wireless bridge between two LAN networks, e.g. in separate buildings. The set includes an access point and a client station.

The devices work in 802.11 a/n standard, and in addition they are equipped with 2x2 MIMO efficient antennas.

Each device is additionally equipped with 2 LAN ports for connecting two more devices and has one PoE port that allows you to power the device and connect it to the LAN network.

SPECIFICATION

Frequency range:	4920 MHz ... 6100 MHz
Antenna type:	2Tx 2Rx MIMO 15 dBi Integrated
Standards:	• IEEE 802.11a • IEEE 802.11n
LAN ports:	2 x 10/100 Mbps BASE-TX (Cat. 5, RJ-45)
Receiver sensitivity:	• -96 dBm @ 6 Mbps • -74 dBm @ 65 Mbps
Operation modes:	Station, Station WDS, Access Point, Access Point WDS, WDS Repeater
Transmitter power:	27 dBm
Power supply PoE:	✓
Power supply:	24 V / 0.5 A - PoE (power adapter included)
Operation temp:	-30 °C ... 75 °C
Permissible relative humidity:	5 % ... 95 %
Weight:	0.31 kg - Transmitter / Receiver
Dimensions:	270 x 88 x 41 mm - Transmitter / Receiver
Manufacturer / Brand:	Hikvision
SAP Code:	301801030
Guarantee:	3 years

PRESENTATION

Front view:




Rear view:





Connectors:

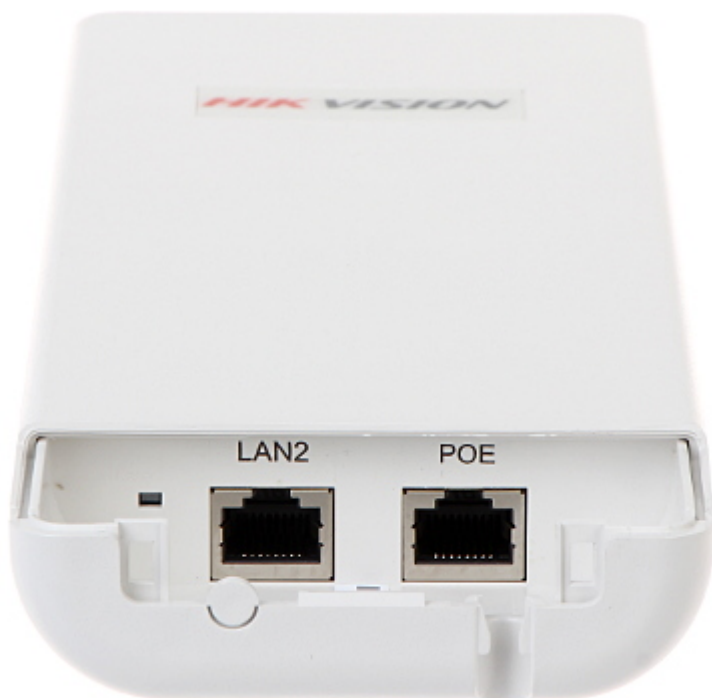

Power adapter:



Adapter connectors:



In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------