

Code: AXON-NET-PROTECTOR

## OVERVOLTAGE LIMITER AXON-NET-PROTECTOR

Net: 107.45 PLN Gross: 107.45 PLN

The device protects all pairs of wires in 4-pair cable. For each pair eliminates overvoltages between wires carrying away the discharge current to the ground by PE wire. The condition of correct protection is connecting the AXON-NET-PROTECTOR device to the proper grounding or PE wire.




### SPECIFICATION

Rated voltage:	5 V
Maximal voltage:	6 V
Voltage protection level line-line:	40 V ... 1 kV/ $\mu$ s
Voltage protection level line-PG:	600 V ... 1 kV/ $\mu$ s
Nominal discharge current (line-line):	20 A (10/1000 $\mu$ s)
Nominal discharge current (line-PG):	20 A (10/1000 $\mu$ s)
Protected pairs of wires:	1-2, 3-6, 4-5, 7-8
Sockets type:	RJ45 (8P8C)
Housing:	Plastic
Color:	White
Norm:	Compliance with PN-EN61643-21
Weight:	0.052 kg
Dimensions:	67 x 60 x 29 mm
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

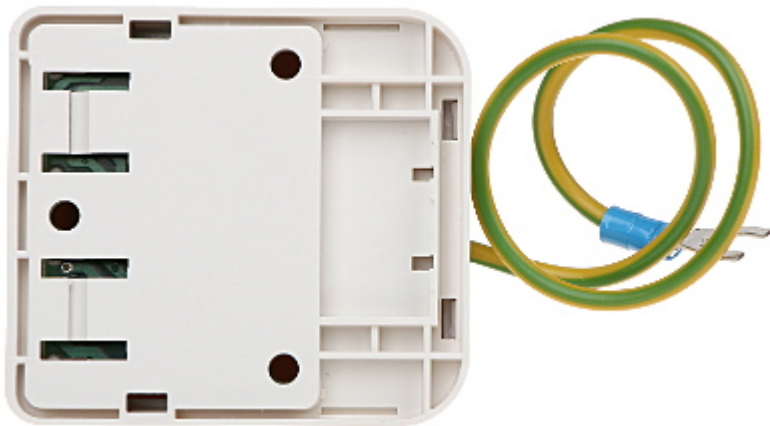

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------