

Code: DH-PFM809-4MP

VIDEO BALUN **DH-PFM809-4MP** DAHUA

Net: **97.50 EUR** Gross: **119.93 EUR**

The DH-PFM809-4MP is designed to video signal transmission via twisted-pair cable. The device adapts the impedance of coaxial cable 75 Ω to the impedance of symmetrical line, ensuring transmission of video signal up to 250m @ 720p / 150m @ 1080p (twisted-pair cable category 5e) and eliminates asymmetric interferences. It is important to pay attention to linking the adequate terminals: (+) and (-). Reverse connection would cause distortion of image.



SPECIFICATION

Standard:	<ul style="list-style-type: none">• AHD - 5 Mpx,• HD-CVI - 8 Mpx 4K UHD,• HD-TVI - 8 Mpx 4K UHD,• CVBS - PAL, NTSC
Device type:	Passive
Number of channels:	16 pcs Video
Video transmission range:	<ul style="list-style-type: none">• 250 m @ 720p - UTP cat. 5e• 150 m @ 1080p - UTP cat. 5e• 400 m @ CVBS - PAL, NTSC - UTP cat. 5e
Coaxial socket voltage range 75 Ω (CVBS):	1 Vpp
Attenuation:	<ul style="list-style-type: none">• 4.43 MHz @ 4.37 dB• 11 MHz @ 4.49 dB• 21 MHz @ 4.84 dB• 38 MHz @ 5.43 dB• 42 MHz @ 5.51 dB• 67.5 MHz @ 5.92 dB
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
Coaxial socket type:	16 x BNC Straight socket
Symmetrical socket type:	16 x screw terminals / 4 x RJ-45 (8-pin, 4 pairs) Socket
Operation temp:	-10 $^{\circ}$ C ... 55 $^{\circ}$ C
Permissible relative humidity:	< 95 %
Weight:	1.21 kg
Dimensions:	430 x 46 x 101 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Connectors view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Front view:



Wiring sequence inside the RJ-45 plug. Plug wiring sequence is consistent with the T568B standard:

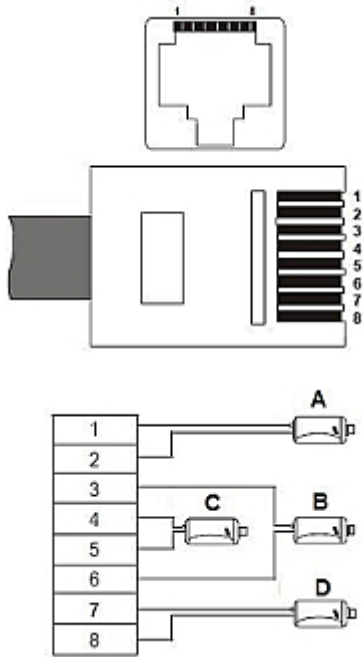


- 1) White/Orange - camera No.1 signal (+)
- 2) Orange - camera No.1 signal (-)
- 3) white/green - camera no.2 (+) signal
- 4) blue - camera no. 3 (-) signal
- 5) white/blue - camera no. 3 (+) signal
- 6) green - camera no. 2 (-) signal
- 7) white/brown - camera no. 4 (+) signal
- 8) brown - camera no. 4 (-) signal

- A) Camera 1
- B) Camera 2
- C) Camera 3
- D) Camera 4

In the kit:



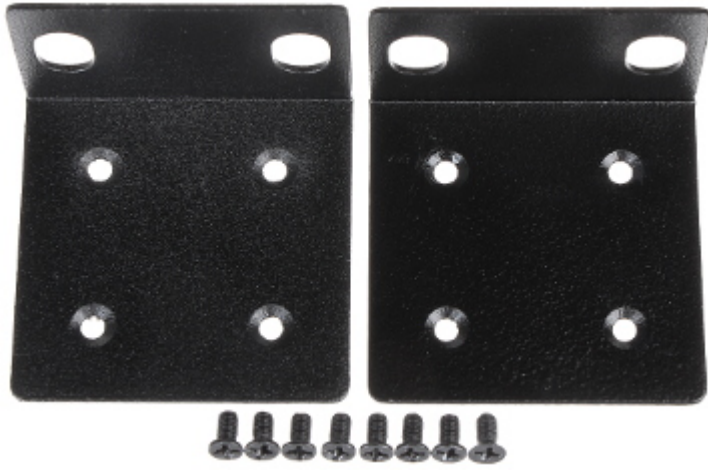

OUR TESTS

Amplitude - frequency response - 2 transformers connected briefly (RF PWR OUT = 0 dBm):



OUR OPINIONS



- Large insertion loss.

