

Code: RV-8/16PR

VIDEO SPLITTER RV-8/16PR

Net: 48.19 EUR Gross: 48.19 EUR

The RV-8/16PR video splitter allows to split video signals. The device is designed to continuous work in closed spaces. The device works with color and b/w cameras at all TV standards PAL. The proper distances among sockets allow to easy BNC connectors mounting.

The RV-8/16PR has the default array set as eight independent video splitters 1/2 (Fig. 1). It is easy to re-program the array using jumpers located on the front panel. There are 22 combinations available. The example four ones are given in the figures. When programming, the table of possible combinations should be employed. The vertical jumpers activate respective inputs and the horizontal ones - connect respective outputs.



SPECIFICATION

Standard:	CVBS - PAL, NTSC
Number of inputs:	8 pcs BNC
Number of outputs:	16 pcs BNC
Bandwidth:	0 ... 40 MHz (-3dB)
Inputs impedance:	75 Ω
Outputs impedance:	75 Ω
Outputs configuration:	✓
Power supply:	12 V DC (power adapter not included)
Current consumption:	100 mA
Gain :	0 dB
Weight:	0.350 kg
Dimensions:	222 x 36 x 110 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years

PRESENTATION

Front panel:




Rear view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view (top):

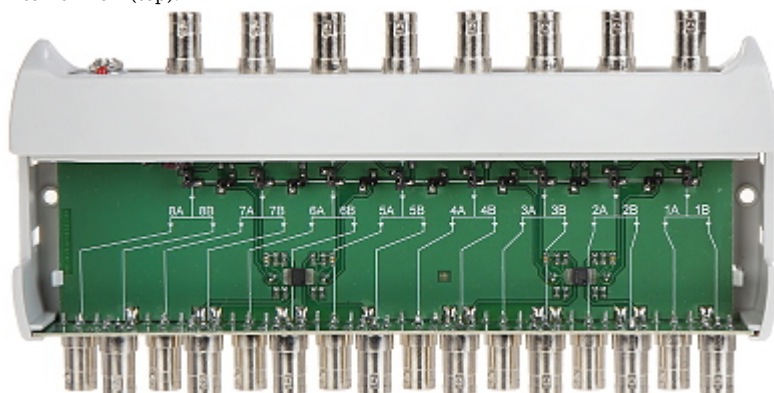

Method of remove the cover:

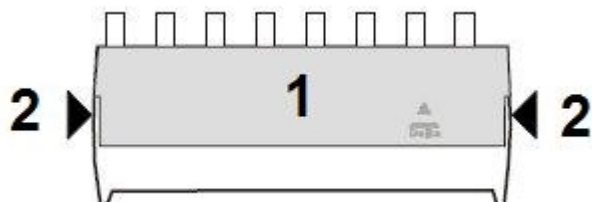

1) Removable cover

2) Press

The splitter configuration table:

zwrócić (zwrócić z góry urządzenia po zdjęciu pokrywy)

ŁOŚĆ ROZGAŁĘZNIKÓW

NUMERY WEJŚĆ


	8	7	6	5	4	3	2	1		8A	7A	6A	5A	4A	3A	2A	1A		8B	7B	6B	5B	4B	3B	2B	1B		
1	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	8	+	-	-	-	-	-	-	-	-	8A	+	-	-	-	-	-	-	-	rys. 1
2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	7	+	-	-	-	-	-	-	-	-	7A	+	-	-	-	-	-	-	-	
3	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	6	+	-	-	-	-	-	-	-	-	6A	+	-	-	-	-	-	-	-	
4	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	5	+	-	-	-	-	-	-	-	-	5A	+	-	-	-	-	-	-	-	
5	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	4	+	-	-	-	-	-	-	-	-	4A	+	-	-	-	-	-	-	-	rys. 2
6	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3	+	-	-	-	-	-	-	-	-	3A	+	-	-	-	-	-	-	-	
7	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	2	+	-	-	-	-	-	-	-	-	2A	+	-	-	-	-	-	-	-	
8	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1	+	-	-	-	-	-	-	-	-	1A	+	-	-	-	-	-	-	-	
9	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	8	+	-	-	-	-	-	-	-	-	8A	+	-	-	-	-	-	-	-	
10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	7	+	-	-	-	-	-	-	-	-	7A	+	-	-	-	-	-	-	-	
11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	6	+	-	-	-	-	-	-	-	-	6A	+	-	-	-	-	-	-	-	
12	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	5	+	-	-	-	-	-	-	-	-	5A	+	-	-	-	-	-	-	-	
13	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	4	+	-	-	-	-	-	-	-	-	4A	+	-	-	-	-	-	-	-	
14	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3	+	-	-	-	-	-	-	-	-	3A	+	-	-	-	-	-	-	-	
15	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	2	+	-	-	-	-	-	-	-	-	2A	+	-	-	-	-	-	-	-	rys. 3
16	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1	+	-	-	-	-	-	-	-	-	1A	+	-	-	-	-	-	-	-	
17	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	8	+	-	-	-	-	-	-	-	-	8A	+	-	-	-	-	-	-	-	
18	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	7	+	-	-	-	-	-	-	-	-	7A	+	-	-	-	-	-	-	-	
19	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	6	+	-	-	-	-	-	-	-	-	6A	+	-	-	-	-	-	-	-	
20	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	5	+	-	-	-	-	-	-	-	-	5A	+	-	-	-	-	-	-	-	
21	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	4	+	-	-	-	-	-	-	-	-	4A	+	-	-	-	-	-	-	-	
22	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3	+	-	-	-	-	-	-	-	-	3A	+	-	-	-	-	-	-	-	
23	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	2	+	-	-	-	-	-	-	-	-	2A	+	-	-	-	-	-	-	-	
24	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1	+	-	-	-	-	-	-	-	-	1A	+	-	-	-	-	-	-	-	rys. 4

NUMERY WYJŚĆ

- (+) - źródło światła
- (-) - brak źródła


- (+) - oznacza, że wyjścia przyporządkowane są do identycznego wejścia widzianego po lewej stronie tabeli.
- 1/2 - rodzaj rozgałęźnika (jedno wejście, dwa wyjścia).

4 examples of splitter configuration:

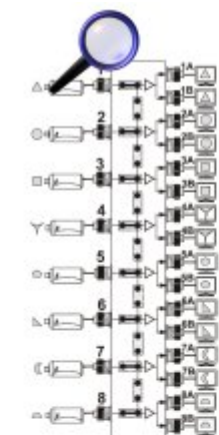


rysunek 1 (8 rozgałęźników 1/2)


— zworka zwarta
- - brak zworki

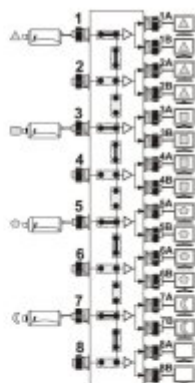

rysunek 2 (4 rozgałęźniki 1/4)

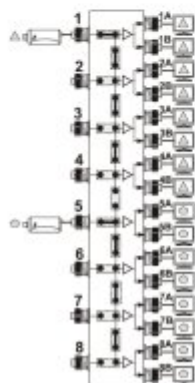

rysunek 3 (2 rozgałęźniki 1/8)

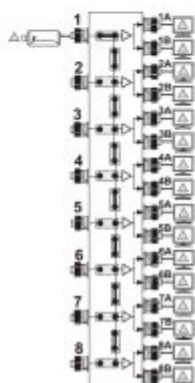

rysunek 4 (1 rozgałęźnik 1/16)

OUR OPINIONS



- The device does not support the standards: AHD, HD-CVI, HD-TVI.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------