

Code: HDMI-PN-300

## EXTENDER **HDMI-PN-300** TXRX SET

Net: **128.08 EUR** Gross: **128.08 EUR**

The device allows to transmit high resolution signal to the TV-set receiver equipped with HDMI connector via 100V - 240V electrical installation.

HDMI-PN-300 is perfect solution to connect the TV-SAT receiver, DVD player, computer or game-console to the TV-set/monitor for a long distance.

Devices must be plugged into the outlets using the same branch (phase).



### SPECIFICATION

Protocols:	HDBiT
Supported HDMI resolutions:	1080p, 1080i, 720p, 576p, 576i, 480p, 480i
Maximal transmission range:	300 m @ 1080p - Within a building
Max. number of receivers working in the same time:	1
Supported audio formats:	DTS-HD, Dolby true HD, LPCM7.1, AC3, DTS, DSD
Power supply:	100 V - 240 V AC / 100 mA
Main features:	IR carrier frequency : 20 ... 60 kHz
Weight:	0.18 kg (single element)
Dimensions:	150 x 93 x 25 mm (single element)
Guarantee:	2 years

### PRESENTATION


Front view:



Transmitter and receiver connectors:



Transmission schematic diagram:

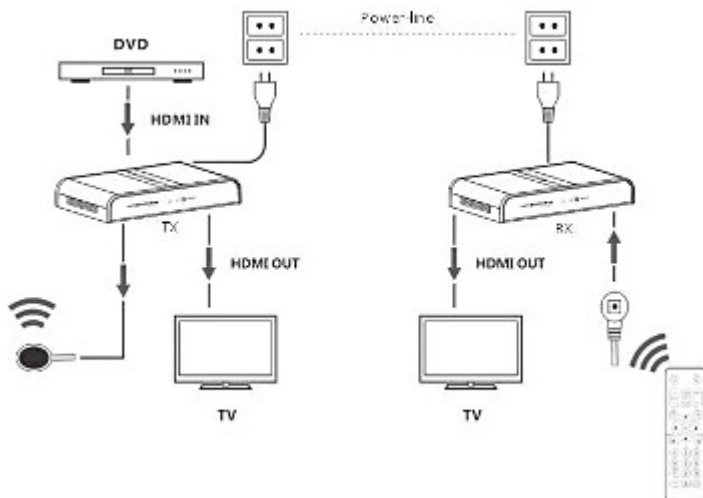

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------