


Code: MC16-PAC-9

## ACCESS CONTROLLER MODULE **MC16-PAC-9** ROGER

Net: **754.95 EUR** Gross: **928.59 EUR**

The MC16-PAC-9 controller is a multifunctional electronic module, intended for use in the RACS 5 system, which enables the implementation of access control of the transition and building automation.

**Attention!** The pre-installed license includes functionality relating to control of the 9 transitions and building automation.

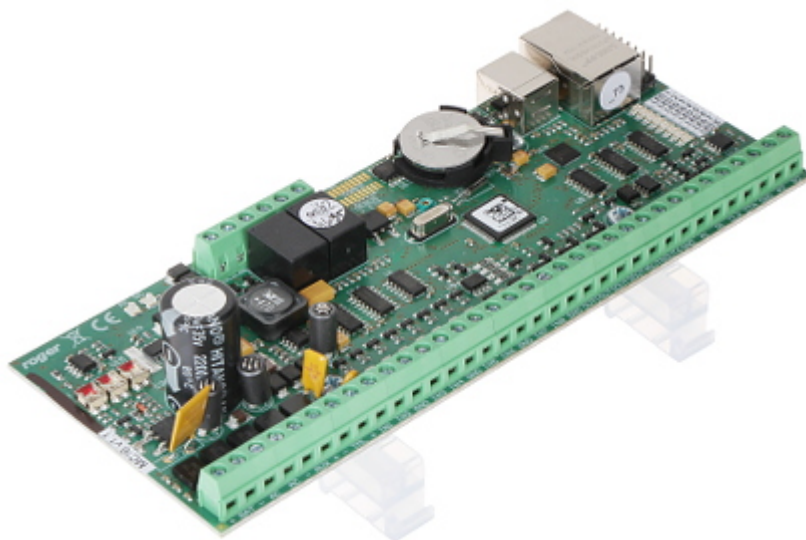


### SPECIFICATION

Number of served transitions:	9
Inputs:	8
Outputs:	8
Number of users:	max. 8192 - Number of identifiers
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Number of permissions per ID:	32
Buffer memory:	8 000 000 events buffer
MCT readers support:	16 pcs
Readers connections:	4 pcs - Wiegand / PRT
Number of login points:	18
Number of access terminals:	36
Number of access zones:	18
Number of alarm zones:	18
Number of automation nodes:	18
Battery backup support:	13.8 V / 7 Ah
Communication:	<ul style="list-style-type: none"><li>• Ethernet 10BASE-T 10/100 Mb/s - RJ-45 socket</li><li>• 2 x Port RS-485</li><li>• RACS (Roger)</li></ul>
Main features:	<ul style="list-style-type: none"><li>• Control of automation from the system terminals</li><li>• Presentation of alarm supervision states on terminals</li><li>• Controlling the supervision state of the alarm system zones</li><li>• Hardware integration with alarm system and fire system</li><li>• Multifunctional parametric inputs including Dual Wiring</li><li>• Weekly access schedules</li><li>• Multi-year calendars of exceptions</li><li>• Integrated support in VISO software</li></ul>


Power supply:	<ul style="list-style-type: none"> <li>• 17 ... 18 V AC</li> <li>• 10 ... 15 V DC</li> <li>• 22 ... 26 V DC</li> </ul>
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	≤ 95 % (non-condensing)
Weight:	0.15 kg
Dimensions:	175 x 72 x 30 mm
Manufacturer / Brand:	ROGER
Guarantee:	<b>3 years</b>


## PRESENTATION

Top view:

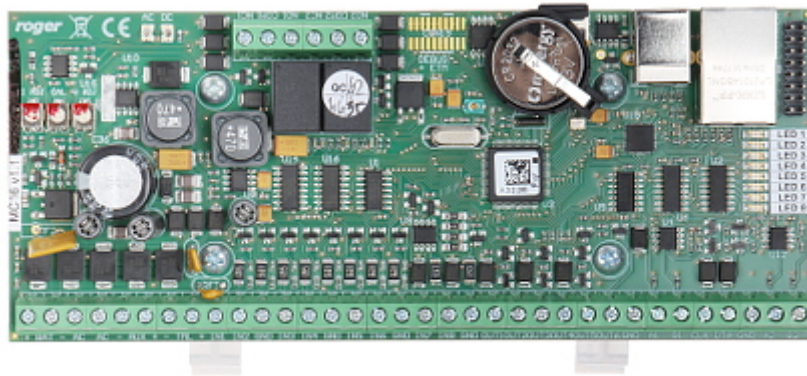


Connectors:

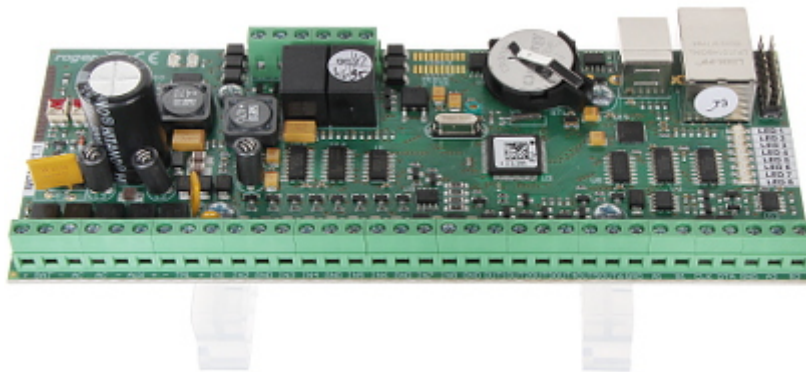

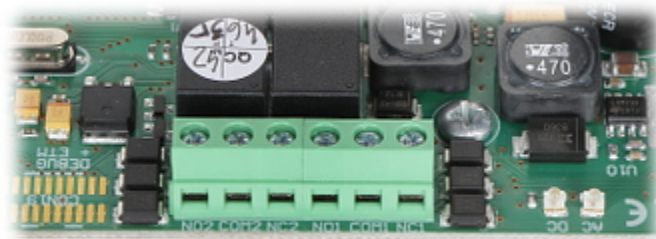

Mounting side view:

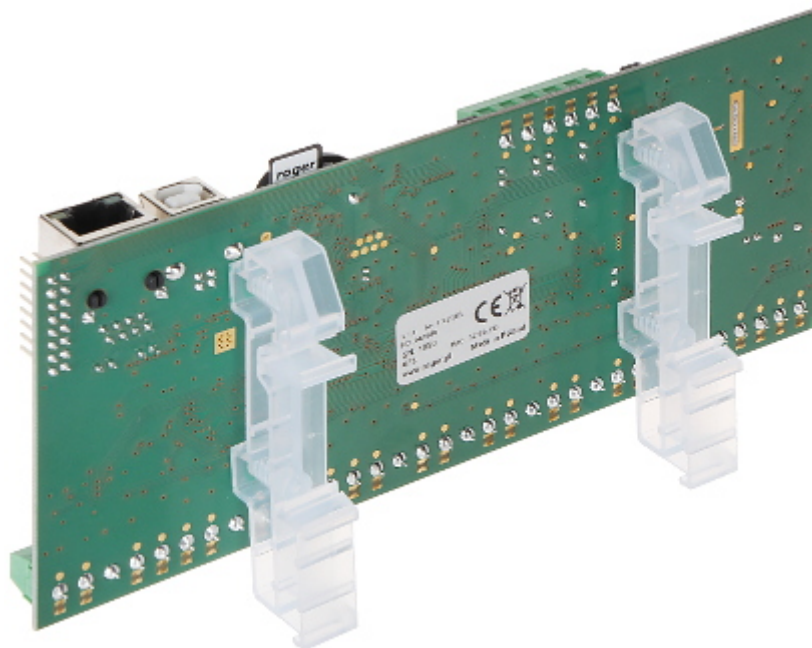

In the kit:

