


Code: MP-1/R

ADJUSTABLE AUDIO MODULE MP-1/R

Net: 5.26 EUR Gross: 5.26 EUR

Using audio signals in CCTV systems allows to increase the whole system effectiveness. The MP-1/R is designed to listen to sound from the surroundings and operate with DVRs. Module was made in SMD technology for further mounting, eg in camera bracket. The device has microphone placed on the cable, and gain control PCB potentiometer. The gain control is useful due to various levels (various sensitivity) of audio recording circuits.

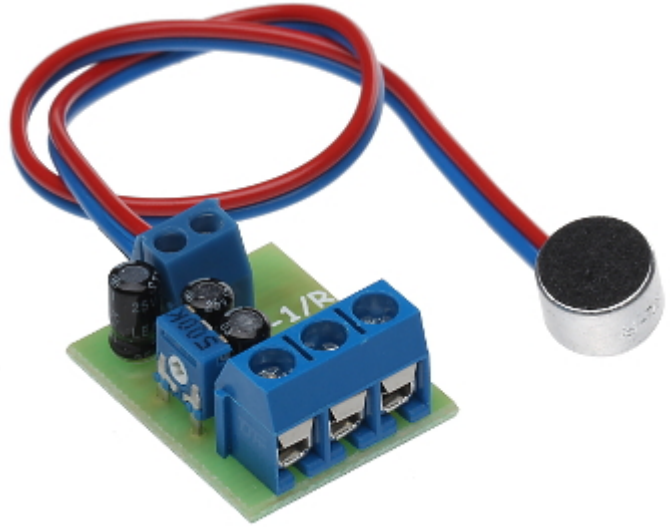


SPECIFICATION


Bandwidth:	20 Hz ... 18 kHz
S/N ratio:	≥ 60 dB
Operation area:	5 ... 150 m ²
Gain adjustment:	1x ... 500x
Output impedance:	600 Ω - Coaxial cable
Microphone:	on the cable (20 cm)
Power supply:	4 V ... 15 V DC 12 V DC (typical)
Current consumption:	5 mA
Housing:	—
Dimensions:	20 x 25 x 15 mm
Weight:	0.007 kg
Manufacturer / Brand:	DELTA
Guarantee:	3 years

PRESENTATION

Top view:

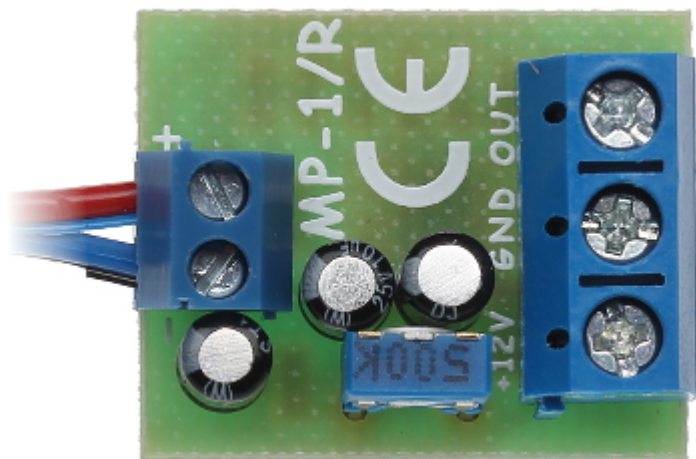

Side view:

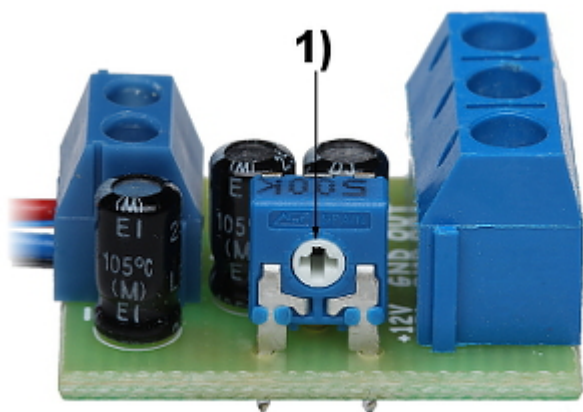


1) Gain adjustment

The device is tiny sizes:



Connection diagram:

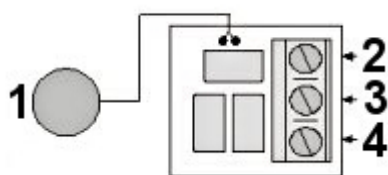

1) microphone

- 2) Output
- 3) ground
- 4) +12V DC - power supply

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

