

Code: DHI-HCVR5108H-S2

HD-CVI, PAL, TCP/IP DVR **DHI-HCVR5108H-S2** 8 CHANNELS DAHUA

Net: **144.45 EUR** Gross: **144.45 EUR**

Tribrid DVR working in standards: HD-CVI - High Definition Composite Video Interface, PAL, TCP/IP.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. Via single coaxial cable can be transmitted three signals: video, audio and control. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

| | |
|-------------------------------------|---|
| Standard: | HD-CVI, PAL, TCP/IP |
| Maximal total frame rate: | <ul style="list-style-type: none">• HD-CVI, PAL : 120 fps @ 1920 x 1080 px, 200 fps @ 1280 x 720 px, 200 fps @ 960 x 576 px,• IP : 50 fps @ 1080p |
| Recording speed adjustment: | <ul style="list-style-type: none">• HD-CVI, PAL 1 ... 15 fps @ 1920 x 1080 1 ... 25 fps @ 1280 x 720 1 ... 25 fps @ 960 x 576 1 ... 25 fps @ 704 x 576 for each channel• IP 1 ... 25 fps @ 1920 x 1080 |
| Operation modes: | <ul style="list-style-type: none">• 8 x HD-CVI / PAL• 7 x HD-CVI / PAL + 1 x IP 1080p• 6 x HD-CVI / PAL + 2 x IP 1080p• 2 x IP 1080p |
| Video inputs: | 8 pcs BNC, HD-CVI / PAL |
| Video outputs: | 1 pcs HDMI 1 pcs VGA |
| Audio inputs: | 1 pcs CINCH |
| Audio outputs: | 1 pcs CINCH |
| Image compression method: | H.264 |
| Number of compression levels: | 4 |
| Image records resolutions: | 1920 x 1080 1280 x 720 960 x 576 704 x 576 352 x 288 |
| Recording modes: | Manual, Motion Detection, Schedule |
| Supported hard drives: | 1 x 4 TB SATA |
| External storage devices backup: | Save single frames and whole records from DVR drive to the USB drive |
| Searching and playback the records: | Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy) |

| | |
|----------------------------------|---|
| Network functions: | Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters |
| Mobile phones support: | Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus |
| Alarm inputs / outputs: | — |
| PTZ control: | RS-485 - PELCO-D/P and others |
| Motion Detection: | Split the screen into zones 22 x 18 motion zones Very good sensitivity after motion detection records detected channels only |
| Mouse support: | ✓ |
| IR remote controller in the set: | — |
| Power supply: | 12 V DC / 2 A (power adapter included) |
| Weight: | 0.5 kg |
| Dimensions: | 325 x 255 x 55 mm |
| Supported languages: | English, Polish |
| Country of origin: | China |
| Guarantee: | 3 years |
| Manufacturer / Brand: | DAHUA |

PRESENTATION

Top view:





Rear view:



In the kit:



Example captures of device interface:

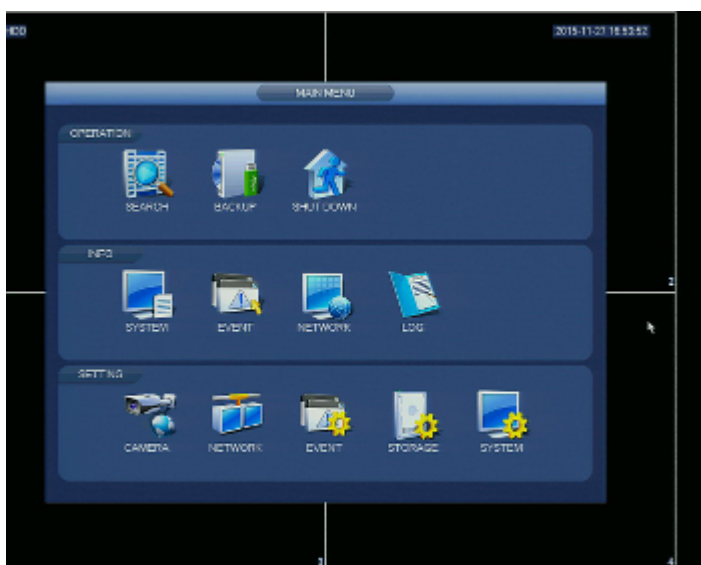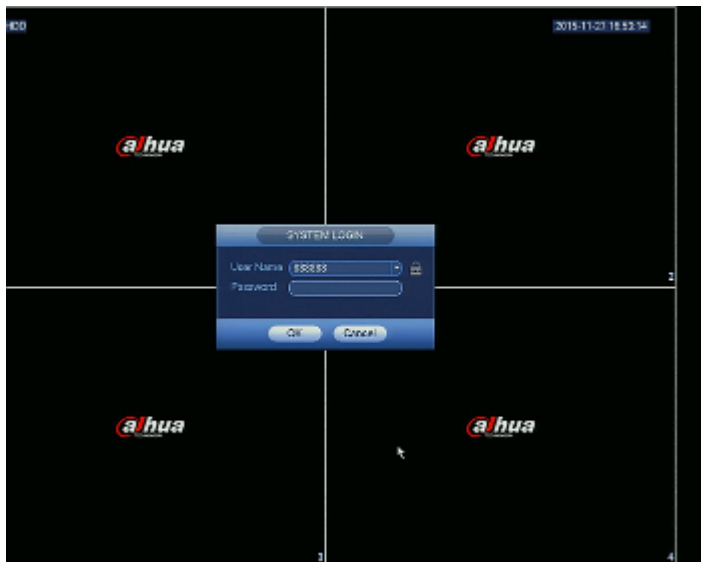

OUR OPINIONS



- The recorder is full compatible with Dahua cameras.

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|