

Code: MBC-9645

MULTI BAND CONVERTER **MBC-9645**

Net: **47.47 EUR** Gross: **47.47 EUR**

Between transmitter and receiver (Stacker i Destacker) should not be used any other devices, such as: amplifiers, splitters, multiplexers. The device operates properly with a good quality antenna cable (e.g. HFEK, Triset) with the length of 50 meters.




SPECIFICATION

| STACKER: | |
|--------------------|---|
| Inputs: | 1x 5 MHz ... 2150 MHz 1x 950 MHz ... 2150 MHz |
| Output: | 5 MHz ... 3550 MHz |
| Attenuation: | Terrestrial : -1 dB SAT : -4 dB SAT after conversion : +6 dB |
| Power consumption: | 0.7 W |
| Weight: | 0.285 kg |
| Dimensions: | 114 x 140 x 48 mm |
| DESTACKER: | |
| Input: | 5 MHz ... 3550 MHz |
| Outputs: | 1x 5 MHz ... 2150 MHz 1x ... 950 MHz ... 2150 MHz |
| Attenuation: | Terrestrial : -1 dB SAT : -4 dB SAT after conversion : +4 dB |
| Power supply: | SAT RECEIVER |
| Main features: | <ul style="list-style-type: none">• Device allows to send a signal from Twin type LNB via one cable to two single satellite receivers or to one Twin PVR• Signal from two single type LNBS is connected via one cable to two single satellite receivers• Signal from two Twin type LNBS (e.g. Astra/Hot Bird) connected through the DiSEqC switch, sent via one cable allows to connecting of two single receivers or one Twin type receiver, which due to using the DiSEqC commands will be able to receive the signal from two satellites• There is also a possibility to send two signals from multiswitch via one cable Each of above solutions makes a possibility to send terrestrial TV signal via existing antenna cable |

| | |
|-------------------------------------|--|
| The advantages of using the device: | <ul style="list-style-type: none"> • Easy extension of the existing antenna installation by connecting of two signals from Twin or Quad type LNBS, what allows to connect the additional satellite receiver or also the Twin typer receiver. These satellite receivers enable for instance recording one channel and watching the other channel in the same time • Existing antenna cable can be using for more applications. There is no need to use new additional cable when you want to connect second satellite receiver in the room • Installation of whole device is very simple |
| Weight: | 0.275 kg |
| Dimensions: | 140 x 92 x 44 mm |
| Guarantee: | 2 years |

PRESENTATION

Schematic diagram with using an existing antenna installation:

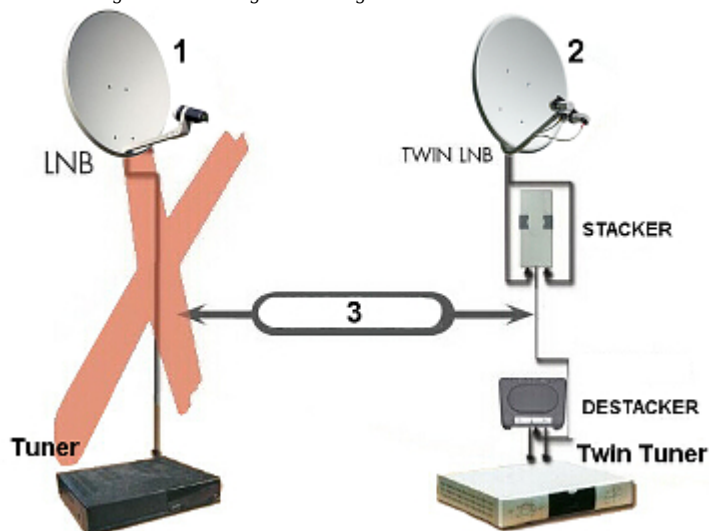

1. Before using
2. After using
3. Cable

Stacker - mounted near by antenna - view after remove the cover:



Bottom view:



Destacker (mounted near by receiver):



Mounting side view:



In the kit:



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

