

HD-CVI, PAL, TCP/IP DVR DHI-HCVR4208A-S3 8 CHANNELS DAHUANet: **187.11 EUR** Gross: **187.11 EUR**

Tribrid DVR working in standards: HD-CVI - High Definition Composite Video Interface, PAL, TCP/IP.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. Via single coaxial cable can be transmitted three signals: video, audio and control. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

**SPECIFICATION**

Standard:	HD-CVI, PAL, TCP/IP
Maximal total frame rate:	• HD-CVI, PAL : 109 fps @ 960 x 1080 px, 130 fps @ 1280 x 720 px, 200 fps @ 960 x 576 px, 200 fps @ 704 x 576 px • IP : 250 fps @ max. 2592 x 1944 px
Recording speed adjustment:	• HD-CVI, PAL 1 ... 25 fps @ 960 x 1080 - first channel 1 ... 12 fps @ 960 x 1080 - other channels 1 ... 25 fps @ 1280 x 720 - first channel 1 ... 15 fps @ 1280 x 720 - other channels 1 ... 25 fps @ 960 x 576 1 ... 25 fps @ 704 x 576 for each channel • IP 1 ... 25 fps @ max. 2592 x 1944 for each channel
Operation modes:	• 8 x HD-CVI / PAL • 7 x HD-CVI / PAL + 1 x IP max. 5 Mpx • 6 x HD-CVI / PAL + 2 x IP max. 5 Mpx • 5 x HD-CVI / PAL + 3 x IP max. 5 Mpx • 4 x HD-CVI / PAL + 4 x IP max. 5 Mpx • 3 x HD-CVI / PAL + 5 x IP max. 5 Mpx • 2 x HD-CVI / PAL + 6 x IP max. 5 Mpx • 1 x HD-CVI / PAL + 7 x IP max. 5 Mpx • 8 x HD-CVI / IP / PAL + 2 x IP max. 5 Mpx Analogue channels have been divided into groups of 4 channels each Within one group it is not possible to mix cameras in resolutions 1080p and 720p Each group can be set in 1080N mode (for cameras with 1080p resolution), or in the 720p mode regardless of the settings of other groups
Video inputs:	8 pcs BNC, HD-CVI / PAL
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio inputs:	4 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.264
Number of compression levels:	4

Image records resolutions:	2592 x 1944 2048 x 1536 1920 x 1080 1280 x 720 960 x 576 704 x 576 352 x 288
Recording modes:	Manual, Motion Detection, Schedule
Supported hard drives:	2 x 6 TB SATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive
Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy)
Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Alarm inputs / outputs:	8 / 3
PTZ control:	IP Speed Dome Cameras, Control compatible with coax PTZ HD-CVI RS-485 - PELCO-D/P
Motion Detection:	Split the screen into zones 22 x 18 motion zones Very good sensitivity after motion detection records detected channels only
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 4 A (power adapter included)
Weight:	1.654 kg
Dimensions:	375 x 287 x 53 mm
Supported languages:	English, Polish
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



Rear view:





In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Example captures of device interface:

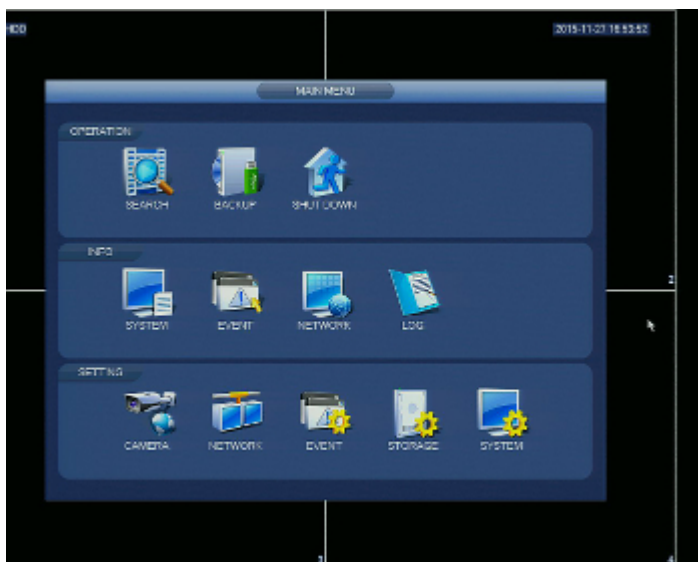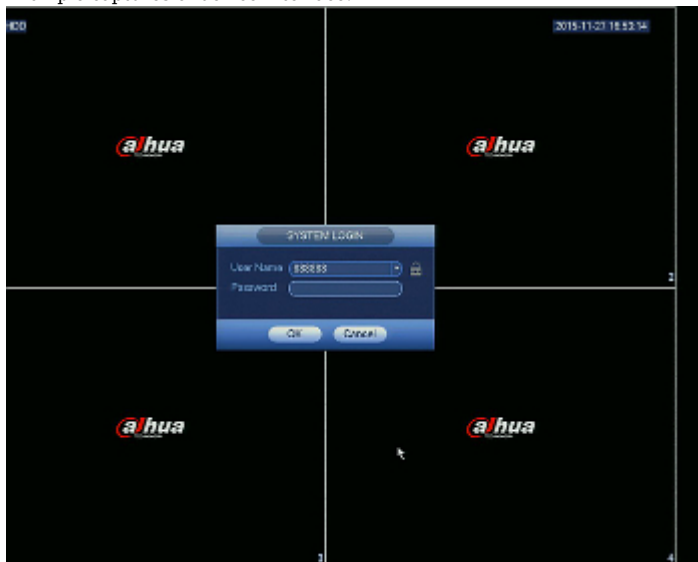

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------