


Code: MS-80491S

MULTISWITCH UNICABLE **MS-80491S** 4 INPUTS / 4 OUTPUTS + 1 UNICABLE OUTPUT

Net: **40.23 EUR** Gross: **49.48 EUR**

The MS-80491S UniCable, SCR Multiswitch is used to expand the classical multiswitch installation to UniCable technology.

The device has 4 inputs and 4 outputs, it can be installed between Quattro LNB and a standard multiswitch. The MS-80491S Multiswitch has an active satellite line, so it can be connected in cascade to the next UniCable Multiswitches and the classical multiswitch without any signal loss.

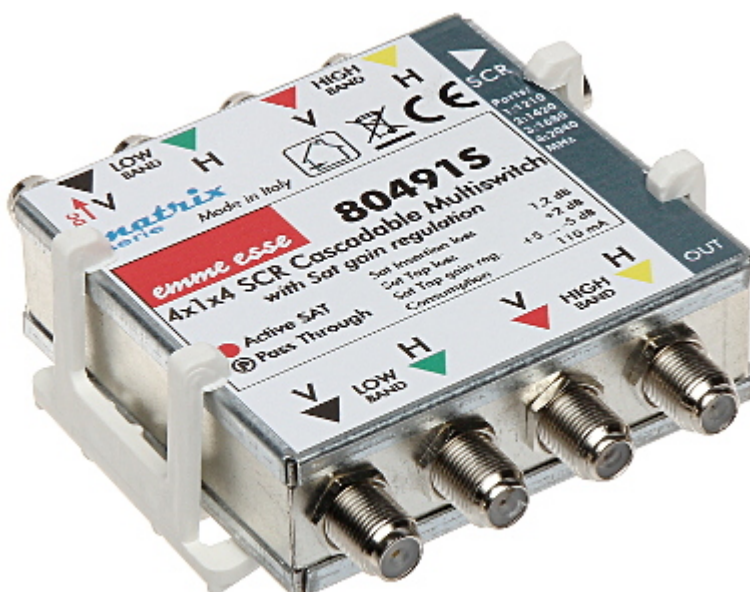

SPECIFICATION

Inputs:	4 x 950 MHz ... 2150 MHz
Outputs:	4 x 950 MHz ... 2150 MHz , 1 x UNICABLE : 1210 / 1420 / 1680 / 2040 MHz
SAT Tap loss:	+2 dB
SAT Gain control:	-5 dB ... +5 dB
Maximal output level SAT:	100 dB
Insertion loss:	< 1.5 dB
Pre-amplifiers powering:	—
Power supply:	14 ... 18 V DC / 110 mA (from output side)
Dimensions:	93 x 90 x 34 mm
Weight:	0.16 kg
Guarantee:	2 years

PRESENTATION


Front view:




Side view:





Mounting side view:

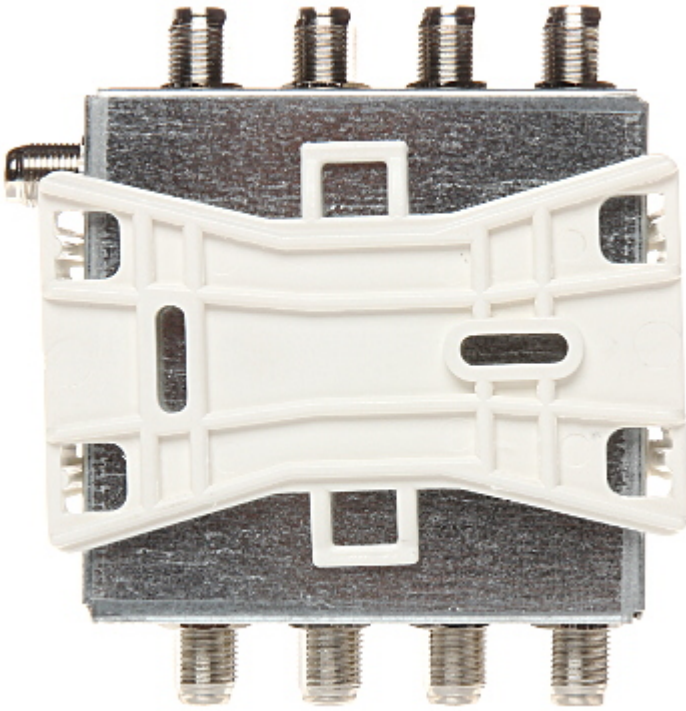


Connectors view:

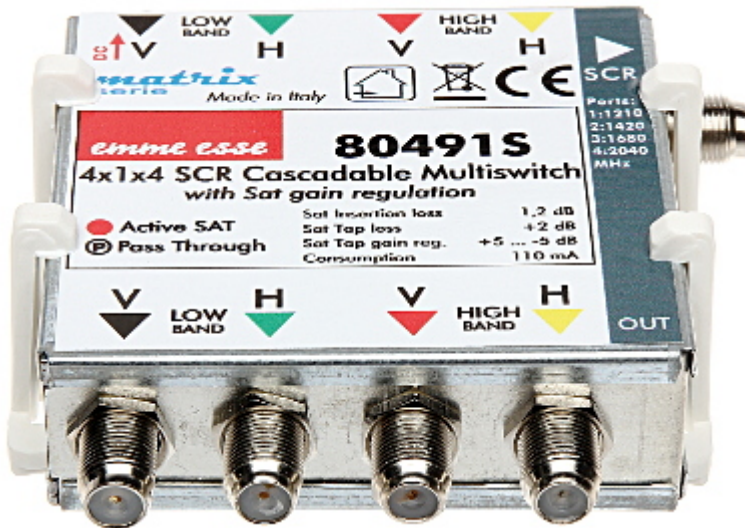


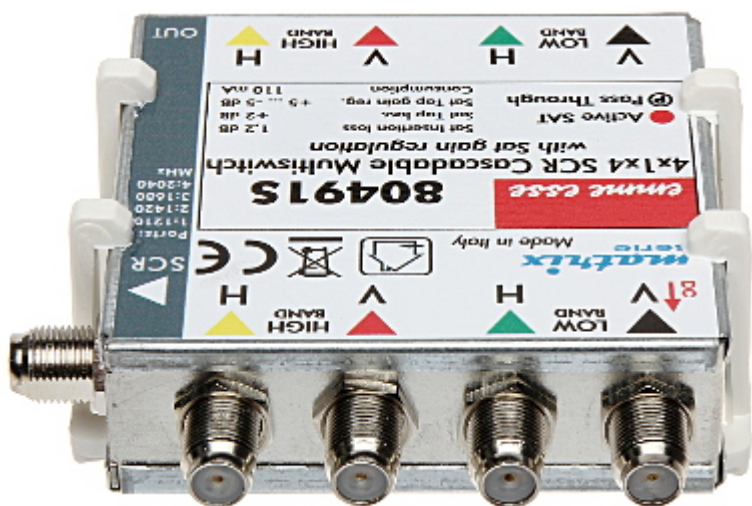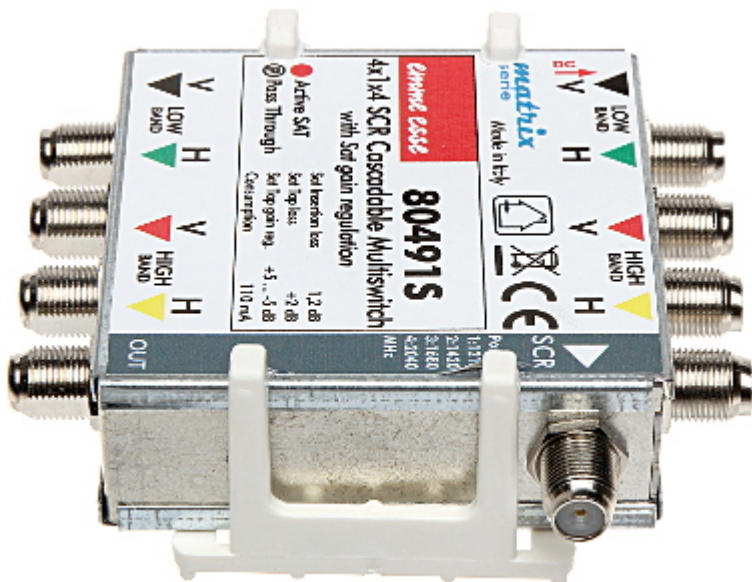

Internal view of the housing:

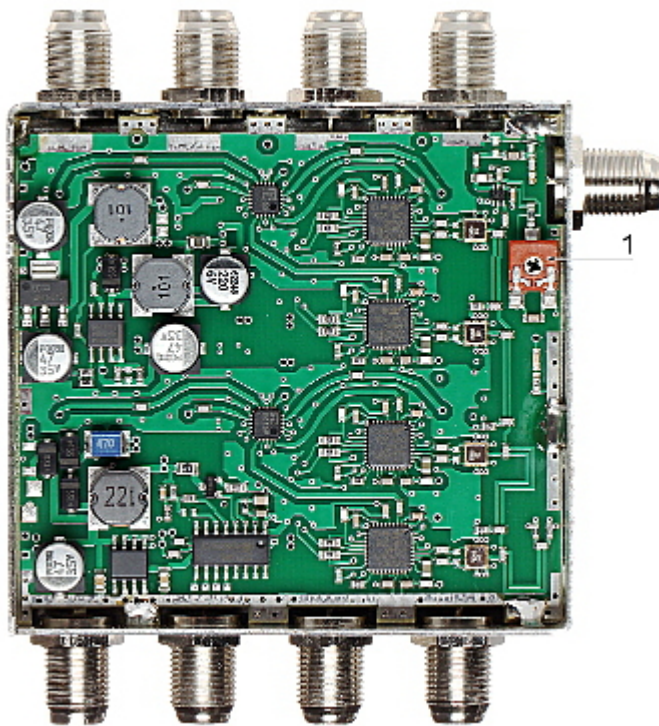

1 - SAT Gain control
 Example of application:

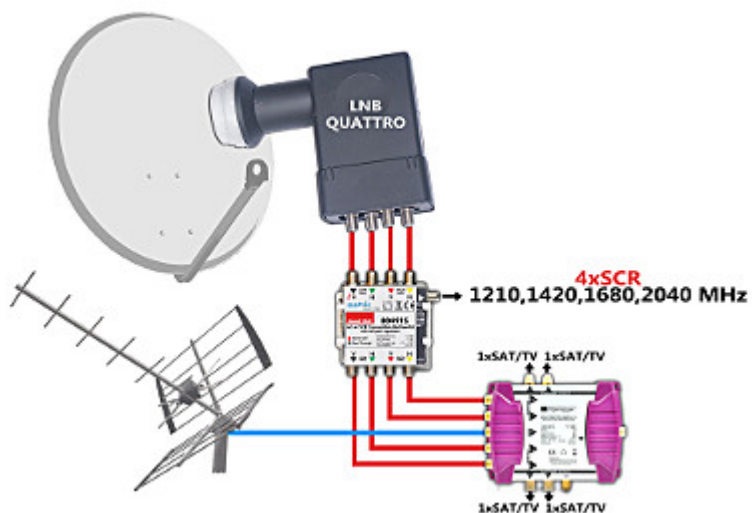

OUR OPINIONS



- Multiswitch works correctly with Evobox PVR decoders. In antenna configuration menu of the decoder you should select the Inverto IDLB-QUDL42-UNI2L-1PP LNB.