

Code: DHI-HCVR5432L-S2

HD-CVI, PAL, TCP/IP DVR **DHI-HCVR5432L-S2** 32 CHANNELS +eSATA DAHUA

Net: **950.90 EUR** Gross: **950.90 EUR**

Tribrid DVR working in three standards: HD-CVI, IP and analog.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

Standard:	HD-CVI, PAL, TCP/IP
Maximal total frame rate:	<ul style="list-style-type: none">• HD-CVI, PAL : 384 fps @ 1920 x 1080 800 fps @ 1280 x 720 800 fps @ 960 x 576• IP : 800 fps @ 1920 x 1080
Recording speed adjustment:	HD-CVI, PAL : 1/16 ... 12 fps @ 1920 x 1080 1/16 ... 25 fps @ 1280 x 720 1/16 ... 25 fps @ 960 x 576 1/16 ... 25 fps @ 704 x 576
Supported resolutions:	<ul style="list-style-type: none">• 32 x HD-CVI @ 1080p / Composite Video (CVBS) @ 960H• 32 x IP @ 720p / 1080p
Operation modes:	32 x HD-CVI / IP / PAL
Video inputs:	32 pcs BNC - HD-CVI / PAL
Video outputs:	2 pcs HDMI 1 pcs VGA 1 pcs BNC
Audio inputs:	<ul style="list-style-type: none">• 4 pcs BNC• 1 pcs BNC - Microphone
Audio outputs:	<ul style="list-style-type: none">• 1 pcs BNC• 1 pcs BNC - Microphone
Image compression method:	H.264
Number of compression levels:	5
Image records resolutions:	1920 x 1080 1280 x 720 960 x 576 704 x 576 352 x 288
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	4 x SATA - 24 TB (max) + 1 x eSATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive
Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters
Network protocols:	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Bitrate:	max. 160 Mbps (total)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Alarm inputs / outputs:	16 / 6
PTZ control:	RS-485 PELCO-D/P
Motion Detection:	Split the screen into zones 22 x 18 motion zones Very good sensitivity after motion detection records detected channels only
Mouse support:	✓
Image analysis:	crossing the line (tripwire), crossing the line (tripwire), intrusion
IR remote controller in the set:	—
Power supply:	230 V AC
Weight:	4.95 kg
Dimensions:	440 x 423 x 76 mm, RACK 19", 1.5U
Supported languages:	English, Polish
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Front view:





Rear view:



In the kit:

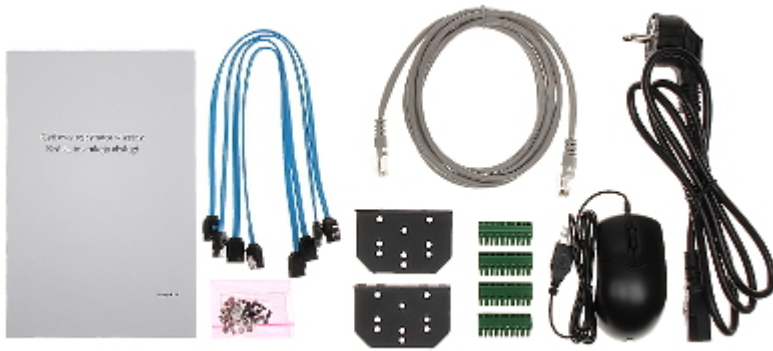

Example captures of device interface:

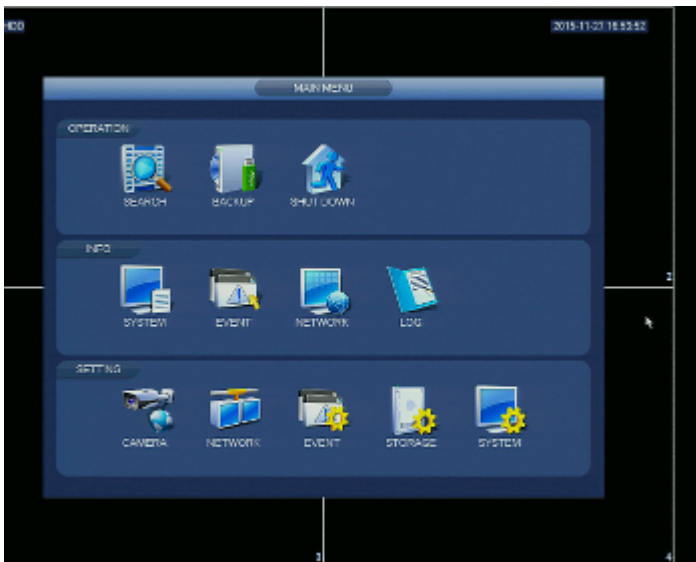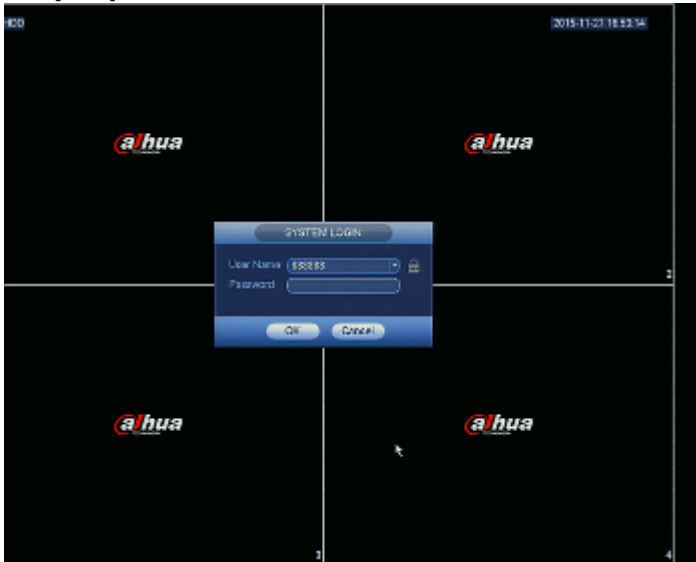

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------