


Code: INT-O/IT

EXPANDER **INT-O/IT** 8 OUTPUTS SATEL

Net: **133.50 EUR** Gross: **133.50 EUR**

The INT-O/IT expander allows to expand the system with 8 programmable wired outputs.

This device is dedicated for INTEGRA, INTEGRA Plus, VERSA, PERFECTA alarm control panels.

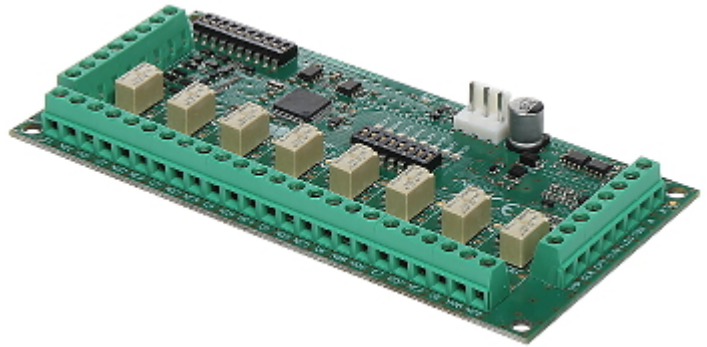


SPECIFICATION

Number of outputs:	8 pcs - programmable
Outputs type:	• 8 pcs OC, • 8 pcs Relay
Tamper output:	✓
Load capacity of OC type programmable outputs:	50 mA / 12 V DC
Relay switching current:	max. 2 A DC
Relay switching voltage:	max. 24 V DC
Current consumption by active relay:	16 mA
Current consumption (w/o OC type output load and w/o active relays):	36 mA
Power supply:	12 V DC / 160 mA (max)
Main features:	• Current-carrying capacity of +12V output 2.5 A / 12 V DC • Each OC type output is parallel connected to the relay output
Operation temp:	-10 °C ... 55 °C
Weight:	0.09 kg
Dimensions:	140 x 68 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years


PRESENTATION

PCB:

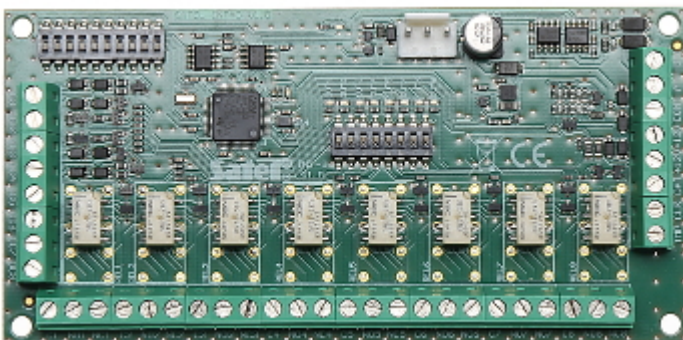

Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

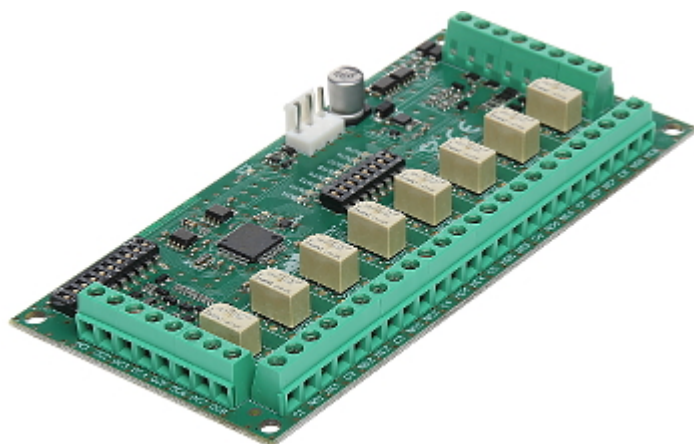

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60