


Code: DS-PM1-I1-WE

WIRELESS INPUT EXPANDER **DS-PM1-I1-WE** AX PRO Hikvision

Net: 257.00 PLN Gross: 316.11 PLN

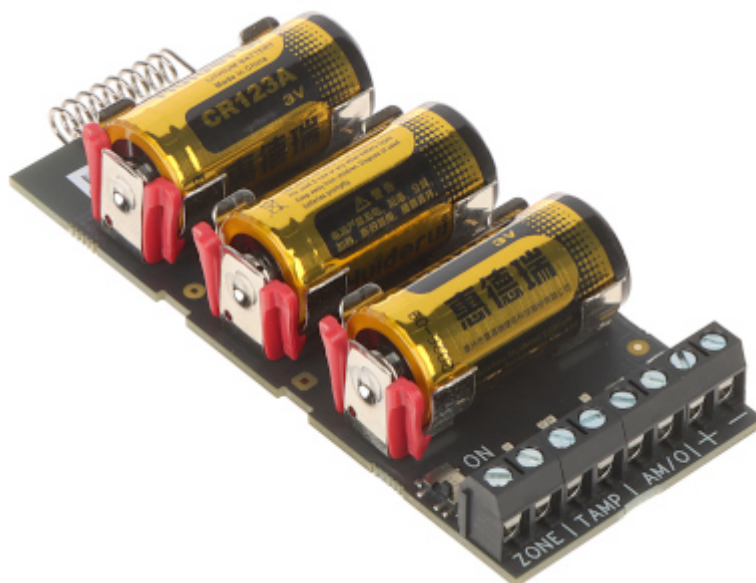


The DS-PM1-I1-WE expander allows you to connect the wired detector to the HIKVISION AX PRO wireless system. The device can also function as a zone input. Additional functionality is provided by a separate TAMPER input and an additional programmable input/output. In addition, the expander is equipped with the option of powering the wired detector with 3V DC voltage and a built-in accelerometer designed to detect device tampering.

SPECIFICATION


| | |
|---|---|
| Support: | Wireless alarm systems HIKVISION AX PRO |
| Operation: | 1 pcs - alarm input 1 pcs - TAMPER input 1 pcs - anti-mask input / Alarm output |
| Frequency band: | 868 MHz |
| Radio communication range (at open area): | 1700 m @ ≤ 10 kbps |
| Tamper output: | Tampering detection - detection of device position change using the accelerometer |
| Power supply: | 3 x Battery : CR123A 3 V (included) |
| Main features: | <ul style="list-style-type: none">• Power output 3.3 V DC / 10 mA - possibility of powering the active detector• Bi-directional encrypted radio communication• AES-128 data encryption• Intelligent jamming detection• Operation status LED indicator : Red / Green |
| Operation temp: | -10 °C ... 55 °C |
| Weight: | 0.08 kg |
| Dimensions: | 102 x 41 x 23 mm |
| Manufacturer / Brand: | Hikvision |
| SAP Code: | 302401879 |
| Guarantee: | 2 years |

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

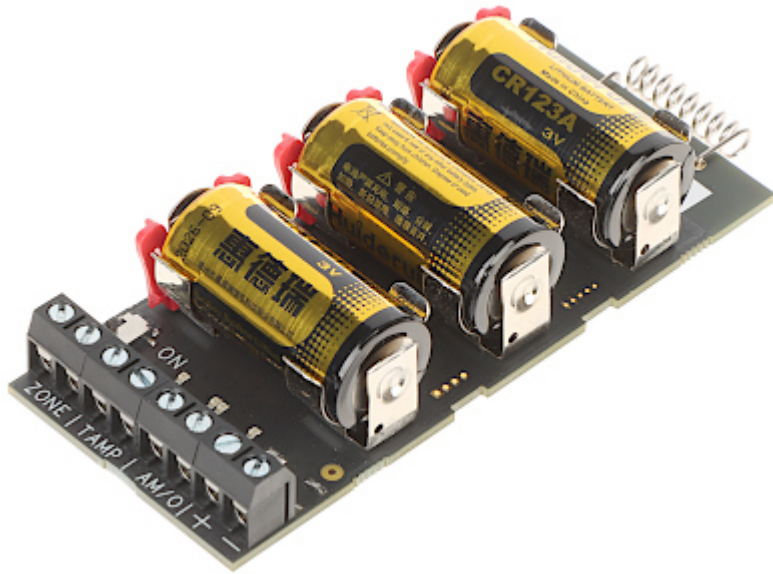


Top view:

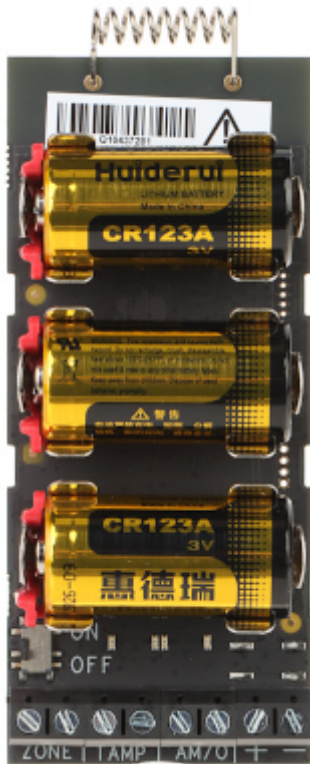


Connectors:

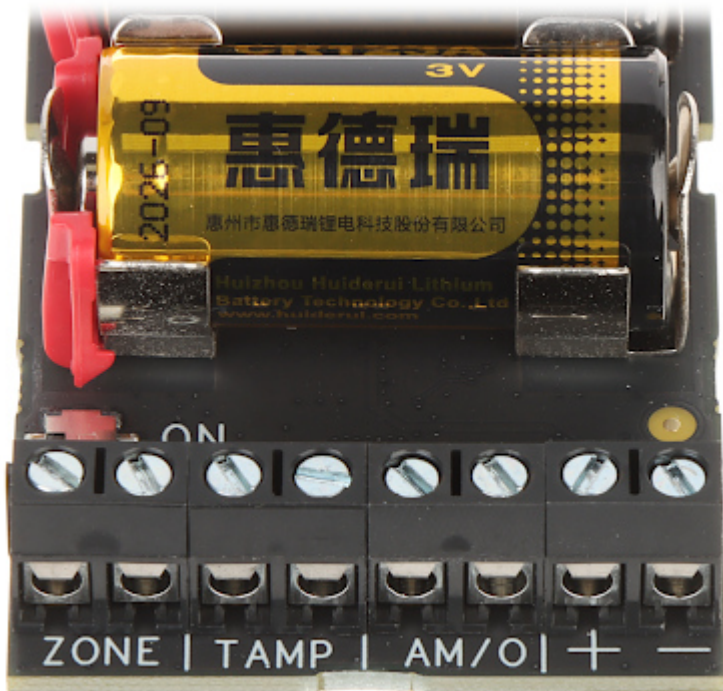

Side view:

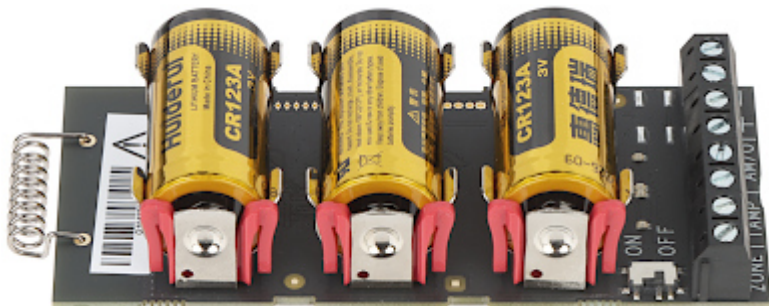

ON-OFF switch:

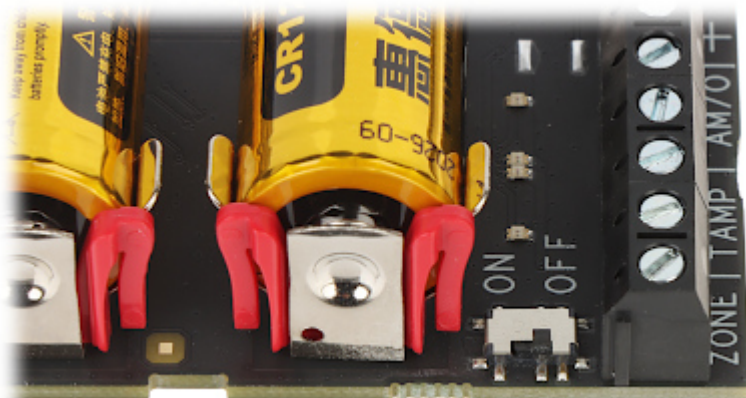

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|