

Code: AWS-1243

## ANTENNA AMPLIFIER AWS-1243 AMS

Net: 29.90 EUR Gross: 36.78 EUR

The AWS-1243 is used to TV signal distribution in home antennas installations.

The amplifier allows to power additional amplifiers via the INPUT (power supply activated by a jumper). The maximum current that can be consumed by an additional amplifier is 100 mA.

The amplifier also has a gain controller that allows to set the optimal signal level in the antenna installation. Amplifier can be powered directly from included power adapter or via output with using a separator.




### SPECIFICATION

Frequency range:	87 MHz ... 790 MHz
Number of inputs/outputs:	1 / 3
Input/output impedance:	75 $\Omega$
Connectors type:	"F"
Gain :	<ul style="list-style-type: none"><li>• A,B outputs : 21 / 25 dB <math>\pm</math> 2 dB,</li><li>• C output : 24 / 28 dB <math>\pm</math> 2 dB</li></ul>
Gain adjustment:	0 ... 10 dB $\pm$ 2 dB
S/N ratio:	$\leq$ 4 dB
Maximum output level:	C output : 104 dB $\mu$ V (2kTV)
IMA3 60dB:	98 dB $\mu$ V
IMA2 60dB:	85 dB $\mu$ V
Return loss:	$\geq$ 10 dB
Pre-amplifiers powering:	✓
Main features:	Built-in pass-through filter 87 ... 790 MHz
Operation temp:	-25 $^{\circ}$ C ... 55 $^{\circ}$ C
Power supply:	12 V DC / 250 mA (power adapter included)
Weight:	0.3 kg
Dimensions:	125 x 88 x 26 mm
Manufacturer / Brand:	AMS
Guarantee:	2 years


### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Connectors:

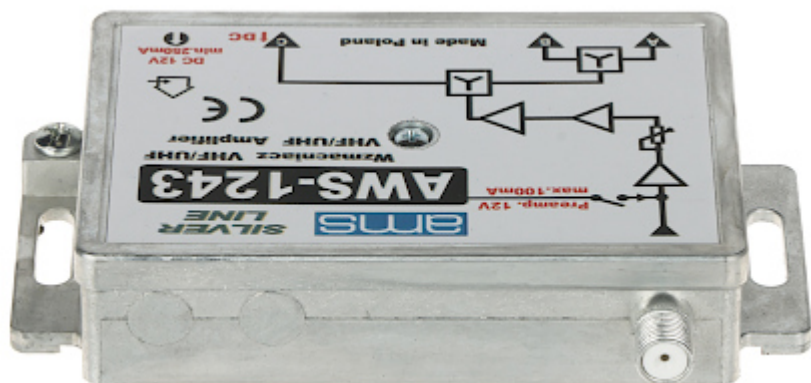

Top view:

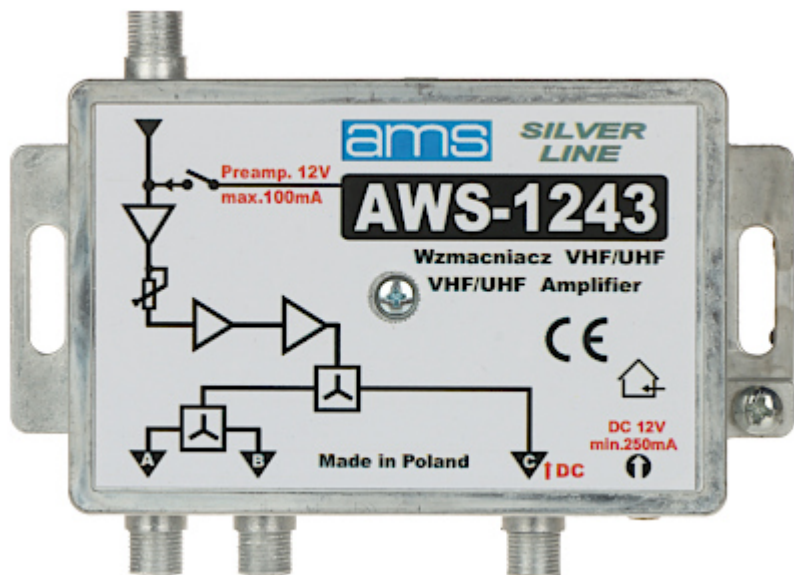

Internal view of the housing:

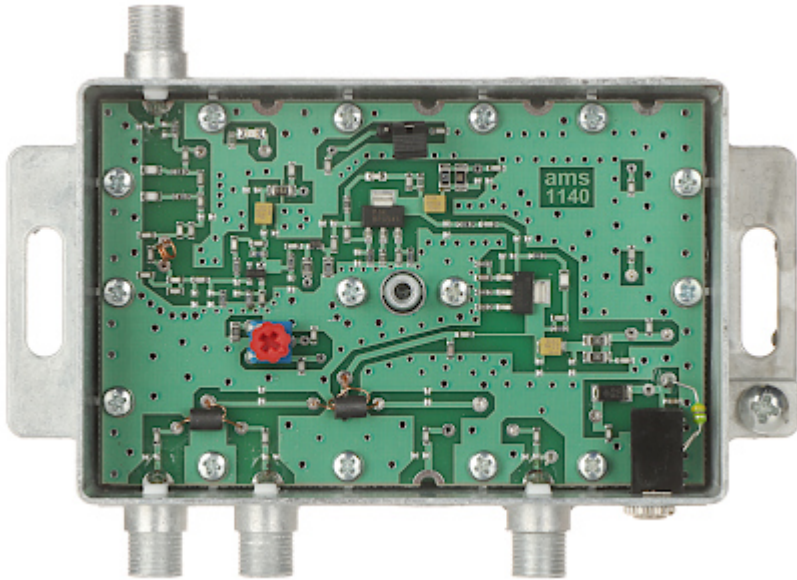

In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

