


Code: AWZ-525

## TIME RELAY MODULE AWZ-525

Net: 13.68 EUR Gross: 16.83 EUR

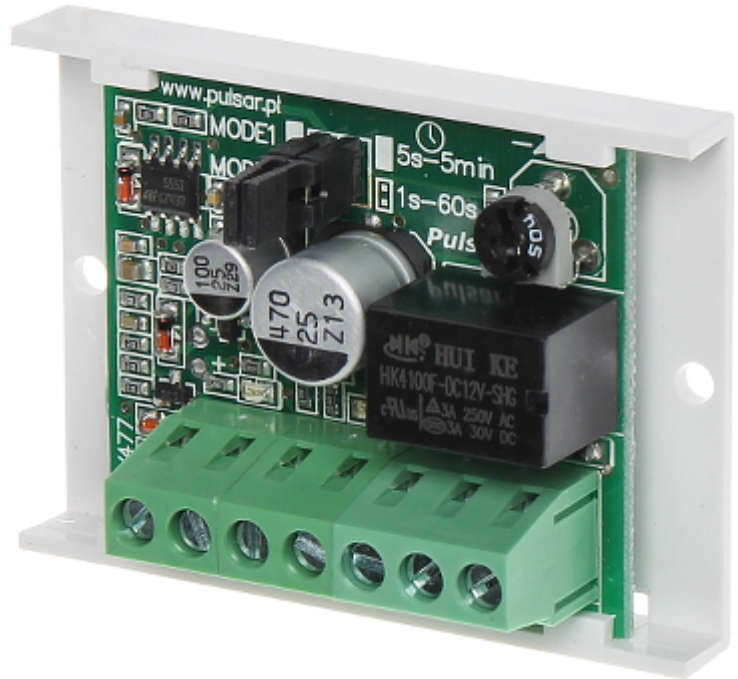

The AWZ-525 allows the extension of the short trigger pulse for the time set by potentiometer. The device can operate in 2 modes: extension of time activated by the pulse or by the triggering signal loss.

The device can be used to extend short control pulses, controlling the operation of bolts, electromagnetic jumpers, bistable control, and also to make the shift in access control projects, depending on the status of the controller, door opening sensor (reed), exit button, etc.


### SPECIFICATION

Number of relay outputs:	1
Power supply:	10 ... 14 V DC
Current consumption:	25 mA (max)
Relay maximal load:	1 A (max) @ 30 V DC / 50 V AC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none"><li>• Time settings range</li><li>1. Range : 1 s ... 60 s ,</li><li>2. Range : 5 s ... 5 minutes</li><li>• LED indication</li></ul>
Operation temp:	-10 °C ... 40 °C
Weight:	0.03 kg
Dimensions:	59 x 43 x 22 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Top view:

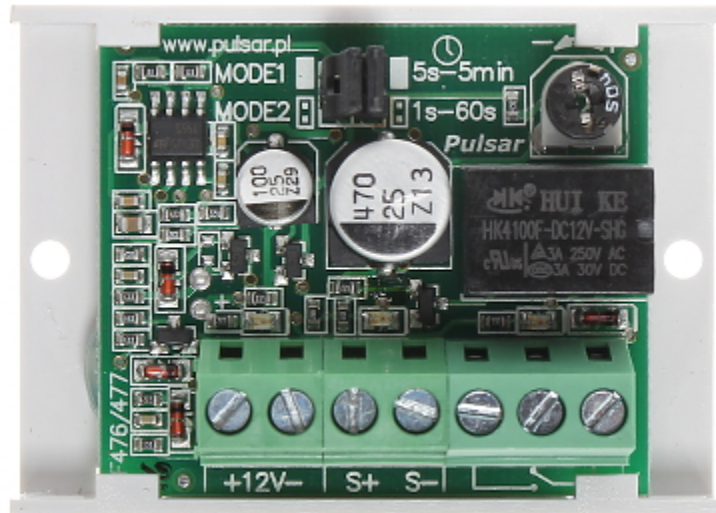

Connectors:

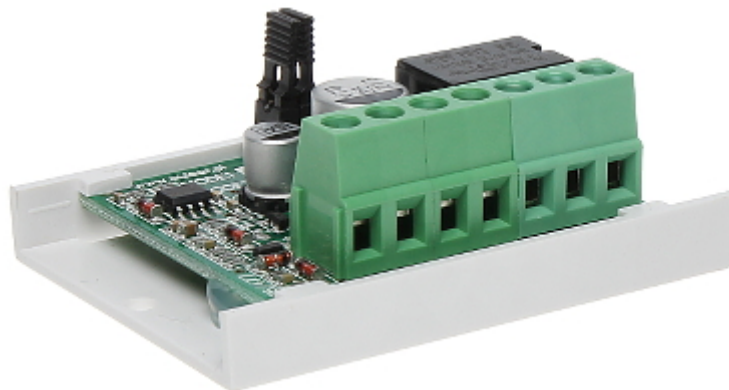

Mounting side view:

