


Code: PSBS-10A12D

## BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBS-10A12D**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment. Please pay attention for proper cooling conditions of the power adaptor during work!

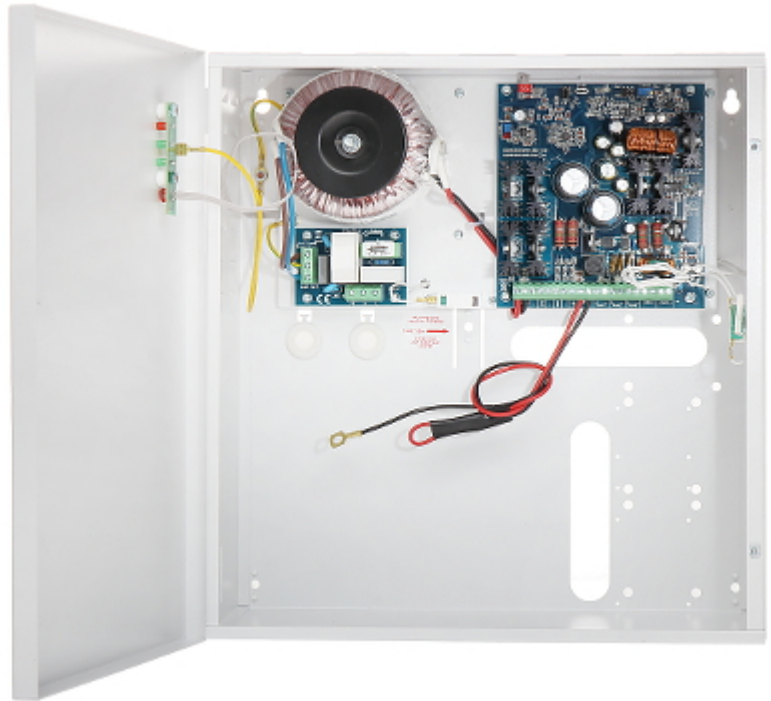

Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	10 A
Battery charging current:	0.7 A / 2.1 A / 3.6 A / 4.8 A
Power:	138 W
Number of outputs:	4
Protections:	<ul style="list-style-type: none"> <li>• Short-circuit</li> <li>• Overload</li> <li>• Overvoltage</li> <li>• Overheat</li> <li>• Tamper</li> <li>• Reverse polarity connection</li> <li>• Discharge</li> </ul>
Adapter operation control:	<ul style="list-style-type: none"> <li>• AC input voltage presence indication AC</li> <li>• DC output voltage presence indication DC</li> <li>• FPS output - indicating power supply unit operation state: normal or failure</li> <li>• FAC output - indicating AC power collapse</li> </ul>
Place for battery:	12V/40Ah
Max. battery dimensions:	300 x 190 x 165 mm



# DATA SHEET

---

Weight:	8.21 kg
Dimensions:	350 x 330 x 178 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years