

Code: HAC-HDW1200TLM-IL-A-0280B-S6-BLACK

# AHD, HD-CVI, HD-TVI, PAL CAMERA **HAC-HDW1200TLM-IL-A-0280B-S6-BLACK** - 1080p 2.8 mm DAHUA

Net: **313.00 PLN** Gross: **313.00 PLN**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

In the case of video transmission using a twisted pair cable and matching transformers (balun), be aware of the possibility of signal reflections and interfering signals. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). Camera is according to IP67 Index of Protection norm.

The device is equipped with Smart Dual Illumination technology, thanks to which the user has a choice of white light mode and IR (infrared) mode. When Smart Dual Illumination is active, the white light will turn on automatically only when an object is detected in the monitored area, which effectively improves the image quality.



## SPECIFICATION

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                          | AHD, HD-CVI, HD-TVI, CVBS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Resolution:                        | 1920 x 1080 - 1080p @ AHD / HD-CVI / HD-TVI @ 25 fps ,<br>960 x 576 - 960H @ PAL @ 25 fps                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Sensor:                            | Progressive Scan CMOS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Lens:                              | 2.8 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| View angle:                        | 102 °                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Range of IR illumination:          | 20 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| White light LED illuminator range: | 20 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| IR illuminator power adjustment:   | Automatic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Video output:                      | AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Audio:                             | <ul style="list-style-type: none"><li>• Microphone built-in,</li><li>• Audio support via coaxial cable - HD-CVI only</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OSD menu:                          | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Main features:                     | <ul style="list-style-type: none"><li>• Smart Dual Illumination technology - IR or LED illuminator works in night mode. White light will turn on automatically only when an object is detected in the monitored area, which effectively improves image quality</li><li>• D-WDR - Wide Dynamic Range</li><li>• 3D-DNR - Digital Noise Reduction</li><li>• BLC/HLC - Back Light / High Light Compensation</li><li>• ICR - Movable InfraRed filter</li><li>• AGC - Automatic Gain Control</li><li>• Privacy zones - max. 8</li><li>• Auto White Balance</li></ul> |
| Power supply:                      | 12 V DC / 220 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                              |                  |
|------------------------------|------------------|
| Power consumption:           | ≤ 2.6 W          |
| Housing:                     | Dome - Metal     |
| Color:                       | White            |
| "Index of Protection":       | IP67             |
| Mechanical protection class: | —                |
| Operation temp:              | -40 °C ... 60 °C |
| Weight:                      | 0.31 kg          |
| Dimensions:                  | Ø 94 x 86 mm     |
| Manufacturer / Brand:        | DAHUA            |
| Guarantee:                   | <b>3 years</b>   |

## PRESENTATION


Camera is out from clamping ring:




Mounting side view:



Mounting dimensions:

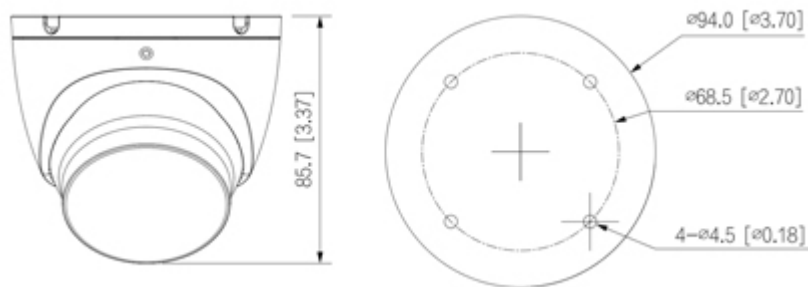

In the kit:

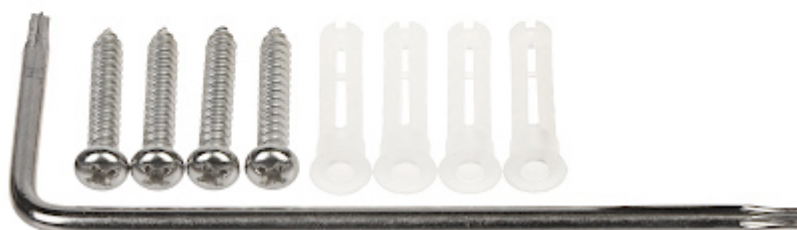

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60