


Code: PR402

PR402

The PR402 controller is intended to use in access control systems based on electrical control of door opening. The PR402 is equipped with buffered power adapter designed to operate with sealed lead-acid battery of 7Ah capacity.

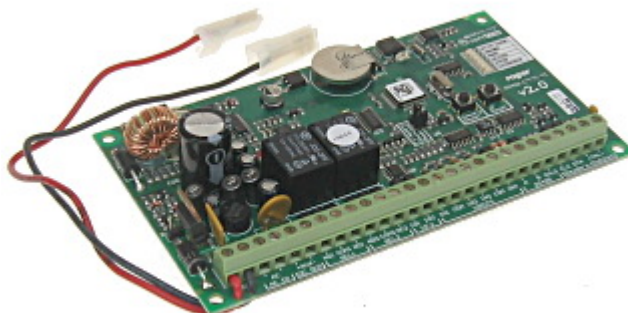

Environment class:	I
Relay contacts load:	1.5 A / 30 V
Battery backup support:	✓
Input lines:	4
Output lines:	4
Communication:	• RS-485 • RACS (Roger)
Power supply:	18 ... 22 V AC / 10 ... 15 V DC
Main features:	• PRT series readers support • 4000 indexed users • History of 32000 events • Remote programming from PC
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
Dimensions:	151 x 87 x 32 mm
Weight:	0.1 kg
Manufacturer / Brand:	ROGER
Guarantee:	2 years