


Code: AWZ-516

## TIME RELAY MODULE **AWZ-516** PULSAR

The AWZ-516 enables realization of one of the 8 time-logic programs.

The device can be used to extend short control pulses, controlling the operation of bolts, electromagnetic jumpers, bistable control, and also to make the shift in access control projects, depending on the status of the controller, door opening sensor (reed), exit button, etc.

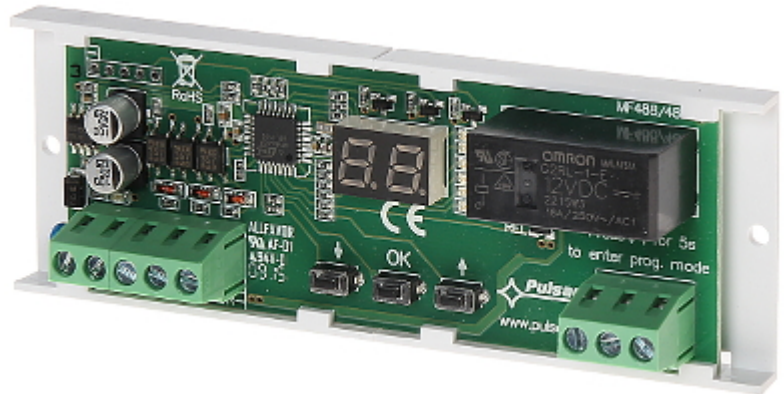

Number of relay outputs:	1
Power supply:	10 ... 14 V DC
Current consumption:	51 mA (max)
Relay maximal load:	10 A (max), 30 V DC / 250 V AC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none"> <li>• EEPROM non-volatile memory,</li> <li>• Time settings range 1 s ... 99 h,</li> <li>• LED indication</li> </ul>
Operation temp:	-10 °C ... 40 °C
Weight:	0.05 kg
Dimensions:	100 x 43 x 23 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years