

Code: DHI-XVR8808S

**HD-CVI, PAL, TCP/IP DVR DHI-XVR8808S 8 CHANNELS +eSATA DAHUA**

Net: 1 408.57 EUR Gross: 1 408.57 EUR

The DHI-XVR8808S digital recorder with AHD (Analog High Definition), HD-CVI (High Definition Composite Video Interface), HD-TVI (High Definition Transport Video Interface), TCP/IP and CVBS interface is a professional device applicable in surveillance systems.

The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.

**SPECIFICATION**

Standard:	AHD, HD-CVI, HD-TVI, PAL, TCP/IP
Video inputs:	8 pcs BNC - AHD / HD-CVI / HD-TVI / PAL
Video outputs:	<ul style="list-style-type: none"> <li>• 2 pcs HDMI</li> <li>• 1 pcs VGA</li> <li>• 1 pcs CVBS - BNC socket</li> <li>• 8 pcs - BNC socket (Loop through) - HD-CVI / CVBS only</li> </ul>
Audio inputs:	8 pcs BNC 1 pcs BNC - External microphone input
Audio outputs:	2 pcs BNC
Maximal total frame rate:	<ul style="list-style-type: none"> <li>• AHD / HD-CVI / HD-TVI / PAL :</li> <li>120 fps @ 2560 x 1440 px - HD-CVI only</li> <li>200 fps @ 1920 x 1080 px,</li> <li>200 fps @ 1280 x 720 px,</li> <li>200 fps @ 960 x 576 px,</li> <li>200 fps @ 720 x 576 px,</li> <li>200 fps @ 352 x 288 px,</li> <li>• IP :</li> <li>1600 fps @ max. 4000 x 3000 px</li> </ul>
Recording speed adjustment:	<ul style="list-style-type: none"> <li>• AHD / HD-CVI / HD-TVI / PAL :</li> <li>1 ... 15 fps @ 2560 x 1440 - HD-CVI only</li> <li>1 ... 25 fps @ 1920 x 1080</li> <li>1 ... 25 fps @ 1280 x 720</li> <li>1 ... 25 fps @ 960 x 576</li> <li>1 ... 25 fps @ 720 x 576</li> <li>1 ... 25 fps @ 352 x 288</li> <li>for each channel</li> <li>• IP</li> <li>1 ... 25 fps @ max. 12 Mpx</li> <li>for each channel</li> </ul>
Operation modes:	<ul style="list-style-type: none"> <li>• 8 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx</li> <li>• 7 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 1 x IP @ 12 Mpx</li> <li>• 6 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 2 x IP @ 12 Mpx</li> <li>• 5 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 3 x IP @ 12 Mpx</li> <li>• 4 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 4 x IP @ 12 Mpx</li> <li>• 3 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 5 x IP @ 12 Mpx</li> <li>• 2 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 6 x IP @ 12 Mpx</li> <li>• 1 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx + 7 x IP @ 12 Mpx</li> <li>• 8 x AHD / HD-TVI @ 1080p / HD-CVI @ 3.7 Mpx / IP @ 12 Mpx + 56 x IP @ 12 Mpx</li> </ul> <p>All modes allow for any combination of the AHD-H, HD-CVI, HD-TVI, PAL cameras</p>
Image compression method:	H.264 / H.264+

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Number of compression levels:	4
Image records resolutions:	2560 x 1440 - HD-CVI only 1920 x 1080 1280 x 720 960 x 576 720 x 576 352 x 288 max. 4000 x 3000 - IP
Recording modes:	Manual, Sensor, Motion detection, Schedule
Supported hard drives:	8 x 8 TB SATA + eSATA
External storage devices backup:	Save single frames and whole records from DVR drive to the USB drive
Searching and playback the records:	Records searching: by time + timeline with record type. Playback: forward, fast, slow, step Advanced searching (to the one second accuracy)
Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, partial configuration of the recorder parameters
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application <a href="#">DMSS</a> • iOS (iPhone): Free application <a href="#">DMSS</a>
Alarm inputs / outputs:	16 / 6
PTZ control:	• IP Speed Dome Cameras • Control compatible with coax PTZ HD-CVI • RS-485 - PELCO-D/P
Motion Detection:	Split the screen into zones 22 x 18 motion zones Very good sensitivity after motion detection records detected channels only
Main features:	Intelligent image analysis : intrusion, crossing the line (tripwire), abandoned/missing object, face detection, people counting
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	230 V AC
Weight:	6.98 kg
Dimensions:	440 x 455 x 95 mm
Supported languages:	English, Bulgarian, Czech, Finnish, Greek, Polish, Romanian, Serbian, Slovenian, Hungarian
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Front panel:



Rear view:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



In the kit:



Example captures of device interface:

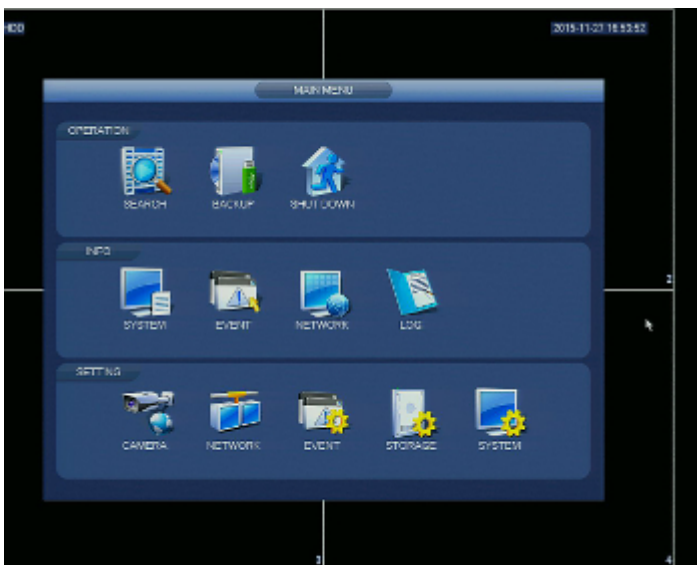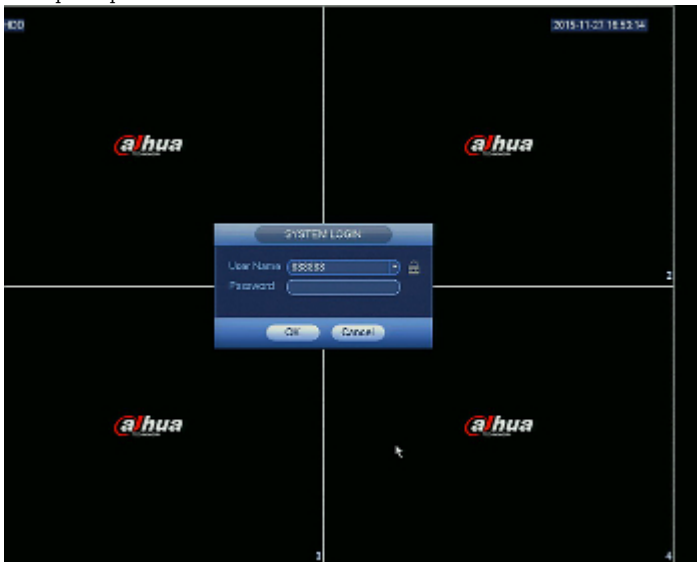

## OUR OPINIONS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



- The DHI-XVR8808S is equipped with USB 3.0 port allowing to fast records backup.

#### PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

