


Code: PSBS-5012D

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBS-5012D** PULSAR

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment. Please pay attention for proper cooling conditions of the power adaptor during work!

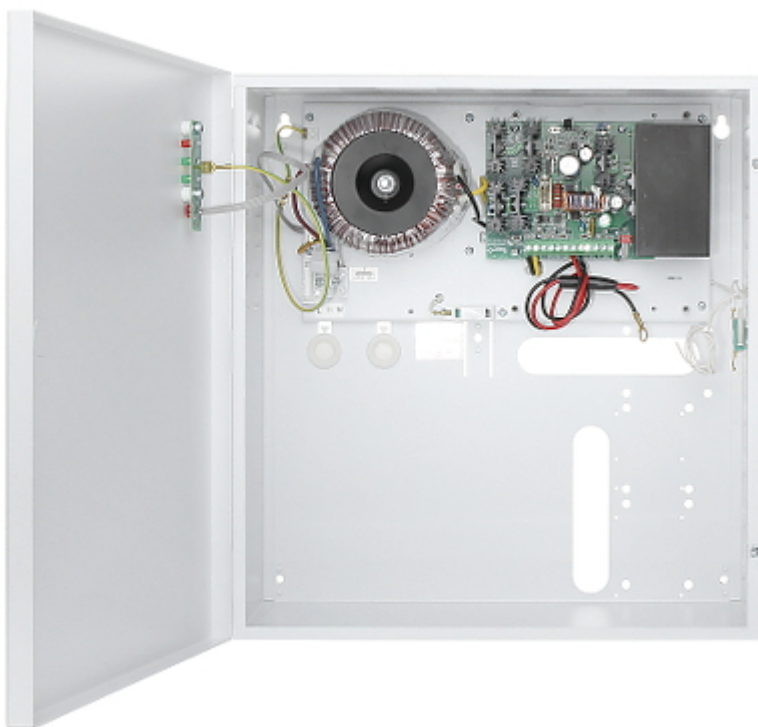

Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	5.5 A
Battery charging current:	0.5 A / 1 A / 2 A / 3 A
Power:	76 W
Number of outputs:	1
Protections:	• Short-circuit • Overload • Overvoltage • Overheat • Tamper • Reverse polarity connection • Discharge
Adapter operation control:	• AC input voltage presence indication AC • DC output voltage presence indication DC • Battery fault indication • EPS FLT output - indicating AC power collapse • PSU output indicating DC voltage loss or power supply unit failure • LoB output - Low battery voltage



DATA SHEET

Place for battery:	12V/40Ah
Max. battery dimensions:	250 x 175 x 165 mm
Weight:	7.49 kg
Dimensions:	336 x 355 x 181 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years