

Code: ATT-1

## VIDEO BALUN ATT-1

Net: 12.82 EUR Gross: 12.82 EUR



The ATT-1 is designed to signal transmission via twisted-pair cable for longer distance, ensuring signal transmission up to 2000 meters. The ATT-1 can also work together with passive devices designed to signal transmission via twisted-pair cable. It is important to pay attention to linking the adequate terminals: (+) and (-).

### SPECIFICATION

Device type:	Active / Transmitter
Power supply:	12 V / 50 mA
Number of channels:	1
Signal distance range:	max. 2000 m
Video bandwidth:	0 ... 9 MHz ( -3 dB )
Coaxial socket impedance:	75 $\Omega$
Symmetrical socket impedance:	100 $\Omega$
LED indicators:	green LED - video signal detection red LED - power on
Coaxial socket type:	BNC Straight socket
Symmetrical socket type:	Cable terminals
Operation temp:	0 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.098 kg
Dimensions:	103 x 20 x 72 mm
<b>The distance switch (LEVEL) settings cause the initial signal correction:</b>	<ul style="list-style-type: none"><li>• L 400 ... 1200 m</li><li>• M 1200 ... 1800 m</li><li>• H &gt; 1800 m</li></ul>
Guarantee:	2 years

### PRESENTATION

Front view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:



Connection diagram:

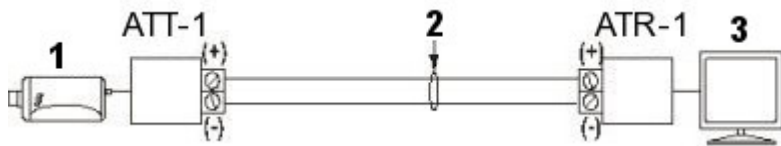

- 1) Camera
- 2) Twisted-pair cable (1 pair)
- 3) Monitor

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------