

# Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity; 2. Improper results of operation of the product or products related with it;

3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

#### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

#### **Proper product disposal:**

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Indoor micro camera equipped with very good quality CMOS sensor.

Camera is equipped with PINHOLE type lens, needs only a very small hole to get right field of view. Included camera software enables management and integrated monitoring of many network cameras.





DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Sensor:         1/3 * Progressive Scan CMOS           Matrix size:         1.3 Mpx           Resolution:         1200 x 960 - 1.3 Mpx, 1200 x 720 r 720 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 714 x 576 - 11, 1200 x 260 - 72 00 r 712 x 500 r 712 x 5	Standard:	TCP/IP
Resolution:1280 x 960 + 1.3 Mpx , 1280 x 720 + 720p 704 x 576 + 11 , 352 x 288 - CIFLens:3.6 mm (pinholo)View angie:3.6 mm (pinholo)Wiew angie:3.6 mm (pinholo)Min. illumination:0.01 Lux / F2.8S/N ratio:> 50 dBAudio:- External microphone input - Audo output - Bedirectional audio streaming support - Natio detactionRS-485 interface:-RS-232 interface:-Bitrade:488192 kbps - H.264Main stream frame rate:25 fps @ 1280 x 960Network protocols:TCP/IP, HTTP, DLPC, DNS, DDNS, FTP, NTPONVIF:2.42Inage compression method:H.264 / MJPEGAudin inguts / outputs:21/2Mobile phones support:-Audio inguts / outputs:21/2Audin inguts / outputs:21/2Audin inguts / outputs:10/2Audin inguts / outputs:3/277Potal Arrows400 37777Abile phones support:80.37777Pot UNTF:80.37777Pot ONVIF:80.37777Pot ONVIF:80.37777P	Sensor:	1/3 " Progressive Scan CMOS
Resolution:       1280 x 720 - 7200- 352 x 288 - CIF         Lens:       3.6 mm (pinholo)         Vew angle:	Matrix size:	1.3 Mpx
View angle:• 83 ° (manufacturer data) • 72 ° (our tests result)Min. illumination:0.01 Lux / F2.8S/N ratio:> 50 dBAudio:• External microphone input • 84 directional audio streaming support • 84 directional audio streaming support • 84 directional audio detectionRs-485 interface:-Rs-232 interface:-Bitrato:25 fps @ 1280 x 960Network protocols:TCP/IP, HTP, DHCP, DNS, DDNS, FTP, NTPONVF:2.42Inage compression method:H.264 / MJPEGNetwork interface:10100 Base-T (R]-45)Admin inputs / outputs:2 / 2Mobile phones support:005 (Phone): Free application DMSS • 105 (Phone): Free	Resolution:	1280 x 720 - 720p 704 x 576 - D1 ,
View alight:•72 * (our tests result)Min. illumination:0.01 Lux / F2.8SN ratio:> 50 dBAudio:* External microphone input • Audio output • Bi-directional audio streaming support • Audio detectionRS-485 interface:-RS-232 interface:-Bitrate:48 8192 kbps - H.264Main stream frame rate:25 fps © 1280 x 960Network protocols:TCP//P, HTTP, DHCP, DNS, DDNS, FTP, NTPONVIF:2.42Inage compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (R]-45)Admin inputs / outputs:2 / 2Mobile phones support:•ONVIF:00.37777• Android: Free application DMSSOrdinal result of the support:0.00 (Phone): Free application DMSSOrdinal result of the support:0.00 (Phone): Free application DMSSOrdinal result of the support:0.37777• Cleint access ports:0.00 37777PC cleint access ports:0.00 37777Port ONVIF:60RTSP URL:Trp://admin.haslo@192.168.1.108.554/cam/realmonitor?channel=1&subtype=0 · Main stream Main stream Main streamRTSP URL:Trp://admin.haslo@192.168.1.108.554/cam/realmonitor?channel=1&subtype=0 · Main stream	Lens:	3.6 mm (pinhole)
SN ratio:> 50 dBAudio:External microphone input · Audio output · Audio output · Audio output · Audio detectionRS-485 interface:-RS-232 interface:-Bitrate:48 8192 kbps - H.264Main stream frame rate:25 fps @ 1280 x 960Network protocols:TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTPONVIF:2.42Inage compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Adarn inputs / outputs:2 / 2Mobile phones support:90rt 37777 · Android: Free application DMSS · Si (Pinone): Free application DMSS · Si (Pinone): Si	View angle:	
Audio:External microphone input 'Audio output 'Bi-directional audio streaming support 'Audio detectionRS-485 interface:-RS-232 interface:/Bitrate:488192 kbps - H.264Main stream frame rate:25 fps @ 1280 x 960Network protocols:TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTPONVIF:2.42Image compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Alarn inputs / outputs:2 / 2Mobile phones support:2 / 2Mobile phones support:102.168.1.108Default admin user / password:80.37777PC client access ports:80.37777PC client access ports:377777Port ONVIF:80RTSP URL:ftsp://admin.haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - riseram	Min. illumination:	0.01 Lux / F2.8
Audio. Audio output . Audio output . Audio output . Audio detectionRS-485 interface:-RS-232 interface:Image: Constant of the second of	S/N ratio:	> 50 dB
R5-232 interface:         ✓           Bitrate:         48 8192 kbps - H.264           Main stream frame rate:         25 fps @ 1280 x 960           Network protocols:         TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTP           ONVIF:         2.42           Inage compression method:         H.264 / MJPEG           Network interface:         10/100 Base-T (RJ-45)           Alarm inputs / outputs:         2 / 2           Mobile phones support:         2 / 2           Mobile phones support:         endmin / admin           Default admin user / password:         admin / admin           Default P address:         192.168.1.108           Web browser access ports:         80, 3777           PC client access ports:         37777           Port ONVIF:         80           RTSP URL:         rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Min stream	Audio:	<ul><li>Audio output</li><li>Bi-directional audio streaming support</li></ul>
Bitrate:         A8         8192 kbps - H.264           Main stream frame rate:         25 fps @ 1280 x 960           Network protocols:         TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTP           ONVIF:         2.42           Inage compression method:         H.264 / MJPEG           Network interface:         10/100 Base-T (RJ-45)           Alarm inputs / outputs:         2 / 2           Mobile phones support:         2 / 2           Mobile phones support:         0000 TOPT 37777           • Android: Free application DMSS         • 105 (iPhone): Free application DMSS           Default admin user / password:         admin / admin           Default IP address:         192.168.1.108           Web browser access ports:         80, 37777           Parcel access ports:         37777           Pot ONVIF:         80           RTSP URL:         RTSP URL:	RS-485 interface:	-
Main stream frame rate:25 fps @ 1280 x 960Network protocols:TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTPONVIF:2.42Inage compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 - Android: Free application DMSS so (SI Phone): Free application DMSSDefault admin user / password:admin / adminDefault P address:192.168.1.108Web browser access ports:37777PC client access ports:37777Mobile client access ports:37777Stream frame instream frame instream frage instr	RS-232 interface:	¥
Network protocols:TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTPONVIF:2.42Image compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 · iOS (iPhone): Free application DMSS · iOS (iPhone): Free application DMSS · iOS (iPhone): Pree application DMSS · IOS (iPhone): Pree application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:has/o@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Miss itream rtsp://admin:has/o@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Bitrate:	48 8192 kbps - H.264
ONVIF:2.42Image compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 - Android: Free application DMSS - iOS (iPhone): Free application DMSS - iOS (iPhone): Free application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777PC client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - fister am stream	Main stream frame rate:	25 fps @ 1280 x 960
Image compression method:H.264 / MJPEGNetwork interface:10/100 Base-T (RJ-45)Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 • Android: Free application DMSS • iOS (iPhone): Free application DMSS • iOS (iPhone): Free application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin.haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub	Network protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTP
Network interface:10/100 Base-T (RJ-45)Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 • Android: Free application DMSS • iOS (iPhone): IPHONE • IPHONE<	ONVIF:	2.42
Alarm inputs / outputs:2 / 2Alarm inputs / outputs:2 / 2Mobile phones support:Port 37777 • Android: Free application DMSS • iOS (iPhone): Free application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Image compression method:	H.264 / MJPEG
Nobile phones support:Port 3777 • Android: Free application DMSS • iOS (iPhone): Free application DMSS • iOS (iPhone): Free application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Mobile client access ports:37777Mobile client access ports:80Prot ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Network interface:	10/100 Base-T (RJ-45)
Mobile phones support:• Android: Free application DMSS • iOS (iPhone): Free application DMSSDefault admin user / password:admin / adminDefault IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub	Alarm inputs / outputs:	2/2
Default IP address:192.168.1.108Web browser access ports:80, 37777PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub ream	Mobile phones support:	Android: Free application DMSS
Web browser access ports:80, 3777PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub	Default admin user / password:	admin / admin
PC client access ports:37777Mobile client access ports:37777Port ONVIF:80RTSP URL:rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Default IP address:	192.168.1.108
Mobile client access ports:       37777         Port ONVIF:       80         RTSP URL:       rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Web browser access ports:	80, 37777
Port ONVIF:     80       RTSP URL:     rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	PC client access ports:	37777
RTSP URL: rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Mobile client access ports:	37777
RTSP URL: Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream	Port ONVIF:	80
Memory card slot: Cards support max. 64 GB	RTSP URL:	Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub
	Memory card slot:	Cards support max. 64 GB





Power supply:	• 12 V DC / 580 mA, • PoE (802.3af)
Power consumption:	< 7 W
Main features:	<ul> <li>BLC - Back Light Compensation</li> <li>HLC - High Light Compensation (spot)</li> <li>WDR - Wide Dynamic Range</li> <li>3D-DNR - Digital Noise Reduction</li> <li>Configurable Privacy Zones</li> <li>IVS analysis - crossing the line (tripwire), intrusion, abandoned/missing object, scene changing, face detection</li> </ul>
Length of the cable:	8 m
Operation temp:	-30 °C 60 °C
Weight:	0.20 kg - Network module 0.22 kg - Camera
Dimensions:	110 x 83 x 24 mm - Network module Ø 27 x 49 mm - Camera
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

### Network module:

Allhura	
alhua	
TECHNOLOGY	

Camera is very small:







Device connectors:




DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

2024-04-26





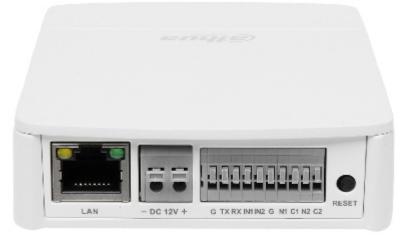

### In the kit:



#### PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



