

Code: BCS-L-DIP25FSR4-AI2

IP VANDALPROOF CAMERA **BCS-L-DIP25FSR4-AI2** - 5 Mpx 2.8 mm BCS Line

Net: **302.99 EUR** Gross: **302.99 EUR**



IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 MPx.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

SPECIFICATION

Standard:	IP
Resolution:	2960 x 1668 - 5 Mpx , 2880 x 1620 - 4 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 4 Mpx , 2304 x 1296 - 3 Mpx , 2048 x 1536 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Sensor:	1/2.7 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none">• 111 ° (manufacturer data)• 105 ° (our tests result)
Range of IR illumination:	50 m
RS-485 interface:	—
Memory card slot:	Micro SD card support up to 512GB
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in• Audio input• Audio output• Bi-directional audio streaming support• Audio detection
Main stream frame rate:	25 fps @ 5 Mpx

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
ONVIF:	✓
Intelligent image analysis:	<ul style="list-style-type: none"> • intrusion • crossing the line (tripwire) • classification of people and vehicles • fast moving • loitering • crowd detection • parking detection • person/vehicle recognition for area intrusion • abandoned/missing object • face detection and tracking - recognition of facial attributes and expressions • people counting • heat map
Main features:	<ul style="list-style-type: none"> • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • BLC/HLC - Back Light / High Light Compensation NAS - Network Attached Storage support • SMD 3.0 - searching for an object classified as: human, motor vehicle
Mobile phones support:	<p>Access by a cloud (P2P)</p> <ul style="list-style-type: none"> • Android: Free application BCS Manager • iOS (iPhone): Free application BCS Manager
Access from PC:	Port no.: 37777 or access by a cloud (P2P) - PC: Free application BCS Manager
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	<p>rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream</p> <p>rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream</p>
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 740 mA
Power consumption:	≤ 8,8 W
Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP67
Mechanical protection class:	IK10
Operation temp:	-40 °C ... 60 °C
Weight:	0.515 kg
Dimensions:	Ø 89 x 111 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS Line
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Memory card slot and "Reset" button:



Connectors:




Connectors description:



Dimensions:



In the kit:

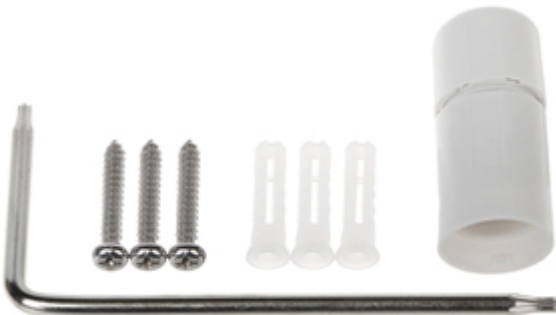

Example captures of device interface:





PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------