

Code: DH-HAC-HDW2221EP

HD-CVI, PAL CAMERA **DH-HAC-HDW2221EP** - 1080p 3.6 mm DAHUA

Net: **84.05 EUR** Gross: **84.05 EUR**

Megapixel camera with 1/2.7" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL. The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. Via single coaxial cable can be transmitted three signals: video, audio and control. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image. Camera is according to IP67 Index of Protection norm.



SPECIFICATION


Standard:	HD-CVI, PAL
Sensor:	1/2.7 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p
Range of IR illumination:	50 m
IR illuminator power adjustment:	Automatic
Lens:	3.6 mm
View angle:	• 90 ° (manufacturer data) • 87 ° (our tests result)
IR illuminator support:	ICR - Movable InfraRed filter
S/N ratio:	> 50 dB
Video output:	• HD-CVI, 1 Vpp / 75 Ω • CVBS, 1 Vpp / 75 Ω
Main features:	• ICR - Movable InfraRed filter • 2D-DNR / 3D-DNR - Digital Noise Reduction • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • WDR - 120 dB - Wide Dynamic Range • Mirror - Mirror image • AGC - Automatic Gain Control • Auto White Balance
OSD menu:	✓, OSD menu available via DAHUA recorder
"Index of Protection":	IP67
Power supply:	12 V DC / 460 mA

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power consumption:	≤ 5.5 W
Housing:	Dome, Metal / Plastic
Vandal-proof:	—
Color:	White
Operation temp:	-30 °C ... 60 °C
Weight:	0.32 kg
Dimensions:	Ø 110 x 95 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Camera is out from clamping ring:

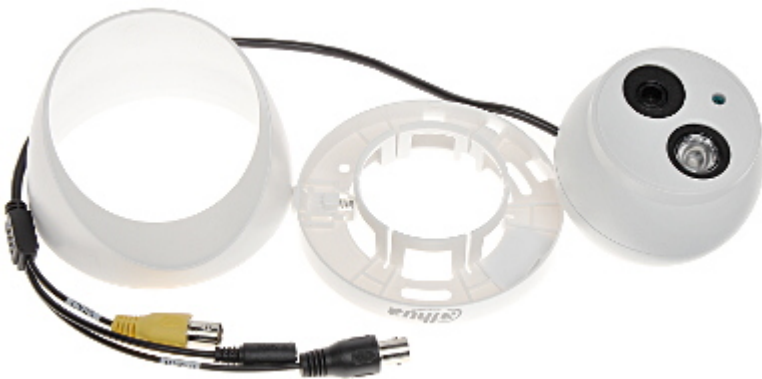

Mounting side view:



In the kit:

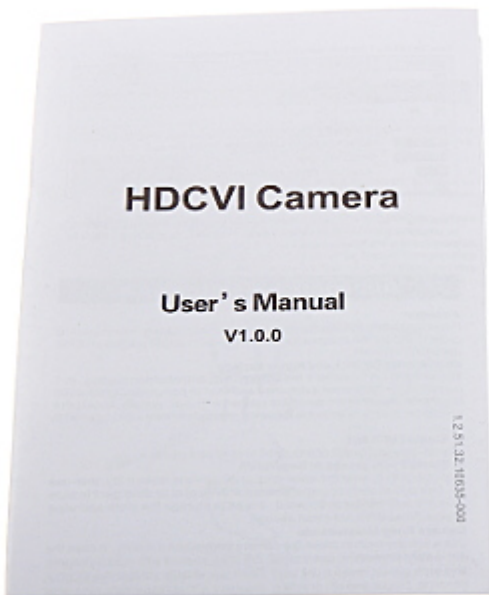

OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

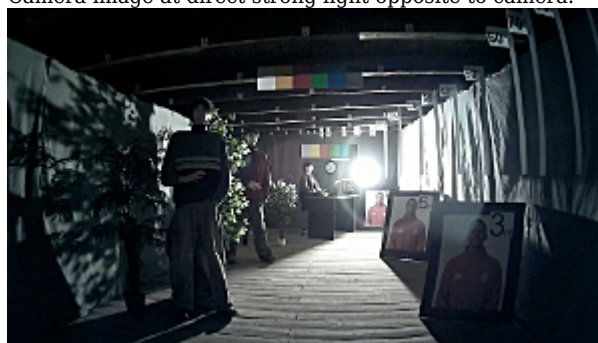

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

