

Code: DH-HAC-HDBW2221FP-02

HD-CVI, PAL VANDALPROOF CAMERA **DH-HAC-HDBW2221FP-02** - 1080p 2.8 mm DAHUA

Net: **85.43 GBP** Gross: **85.43 GBP**

Megapixel camera with 1/2.7" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL. The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image. The camera has a very flat profile, it's only 51 mm out from the ceiling.



SPECIFICATION

Standard:	HD-CVI
Sensor:	1/2.7 " CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 720p 960 x 576 - 960H, PAL
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 mm
View angle:	116 °
S/N ratio:	> 65 dB
Video output:	• HD-CVI, 1 Vpp / 75 Ω • PAL, 1 Vpp / 75 Ω
Audio:	Microphone built-in
Main features:	<ul style="list-style-type: none">• ICR - Movable InfraRed filter• WDR - 120 dB - Wide Dynamic Range• 2D-DNR / 3D-DNR - Digital Noise Reduction• F-DNR (Defog) - Reduction of image noise caused by precipitation• BLC/HLC - Back Light / High Light Compensation• Mirror - Mirror image• Motion Detection• Additional "Spot" CVBS output - allows to quick view the image from camera and its configuration without the need to disconnect it from monitoring system• Auto White Balance
OSD menu:	✓, OSD menu available via DAHUA recorder
Power supply:	12 V DC / 280 mA
Power consumption:	≤ 3.5 W
Housing:	Dome, Aluminum

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Color:	White
Vandal-proof:	IK10
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.320 kg
Dimensions:	Ø 106 x 51 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Camera view after remove the Dome cover:



Mounting side view:

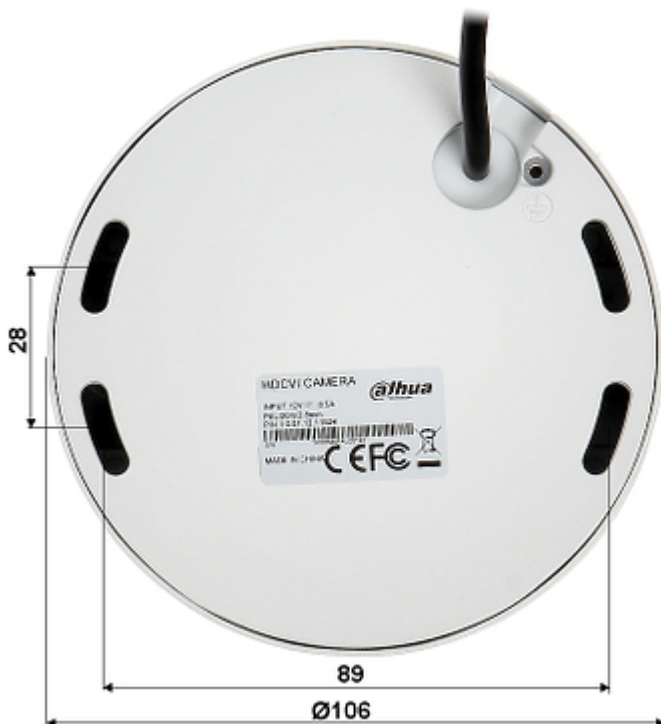

In the kit:

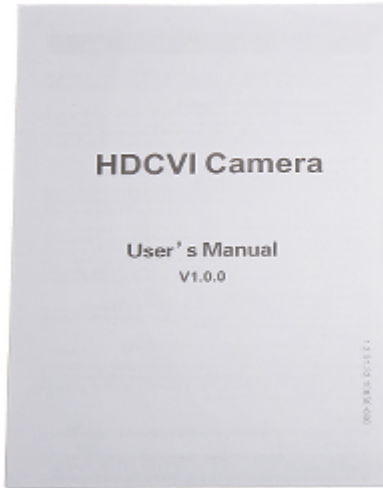

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

- The camera has a very flat profile, it's only 51 mm out from the ceiling.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

