

Code: HAC-HDBW2221R-Z

HD-CVI, PAL VANDALPROOF CAMERA **HAC-HDBW2221R-Z** - 1080p 2.7 ... 12 mm - MOTOZOOM DAHUA Net: **131.24 EUR** Gross: **131.24 EUR**

Megapixel camera with 1/2.7" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL.
The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.
The used motozoom lens with 2.7 ... 12 mm focal length allows to remote view angle adjustment.



SPECIFICATION

Standard:	HD-CVI, PAL
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H, PAL
Video output:	HD-CVI, PAL - 1 Vpp / 75 Ω
OSD menu:	OSD menu available via DAHUA recorder
Lens:	2.7 ... 12 mm - Motozoom
View angle:	• 99 ° ... 37 ° (manufacturer data) • 90 ° ... 34 ° (our tests result)
S/N ratio:	> 65 dB
IR illuminator support:	ICR - Movable InfraRed filter
Range of IR illumination:	30 m
IR illuminator power adjustment:	Automatic
Main features:	<ul style="list-style-type: none">• Motozoom lens• WDR - 120 dB - Wide Dynamic Range• ICR - Movable InfraRed filter• 3D-DNR - Digital Noise Reduction• F-DNR (Defog) - Reduction of image noise caused by precipitation• BLC - Back Light Compensation• AGC - Automatic Gain Control• Motion Detection - max. 4 zones• Privacy zones - max. 8• Mirror - Mirror image• Auto White Balance



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	12 V DC / 330 mA
Power consumption:	≤ 5 W
Housing:	Dome, Metal
Vandal-proof:	✓
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.426 kg
Dimensions:	Ø 122 x 89 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years


PRESENTATION

Camera is out from clamping ring:



Mounting side view:



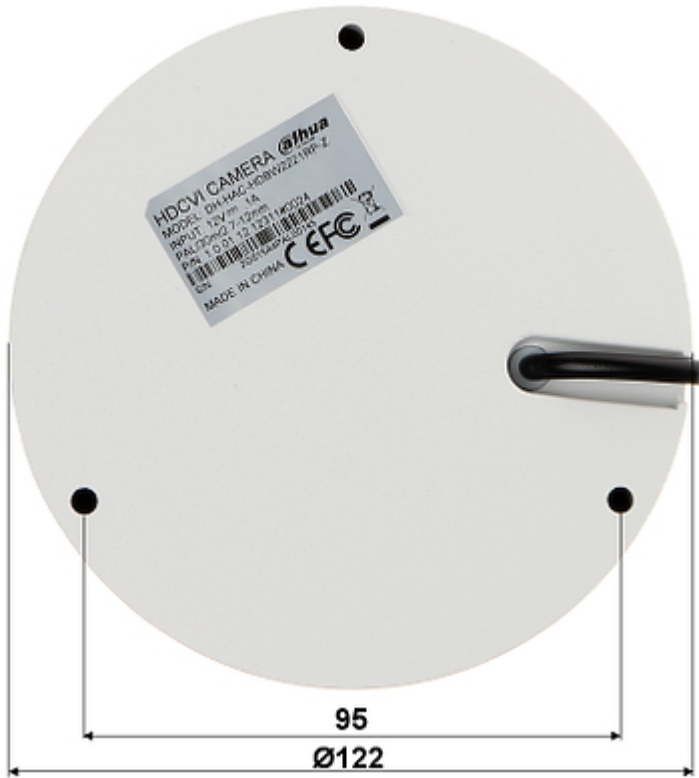

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

