

Code: HAC-HFW2401E-0360B

HD-CVI, PAL CAMERA **HAC-HFW2401E-0360B** - 3.7 Mpx 3.6 mm DAHUA

Net: **111.62 EUR** Gross: **111.62 EUR**

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface). The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.



SPECIFICATION

| | |
|----------------------------------|--|
| Standard: | HD-CVI, PAL |
| Sensor: | 1/3 " Progressive Scan CMOS |
| Matrix size: | 4.1 Mpx |
| Resolution: | 2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H, PAL |
| Lens: | 3.6 mm |
| View angle: | <ul style="list-style-type: none">• 79 ° (manufacturer data)• 77 ° (our tests result) |
| IR illuminator support: | ICR - Movable InfraRed filter |
| Video output: | <ul style="list-style-type: none">• HD-CVI, 1 Vpp / 75 Ω• CVBS, 1 Vpp / 75 Ω |
| S/N ratio: | > 65 dB |
| Range of IR illumination: | 40 m |
| IR illuminator power adjustment: | Automatic |
| OSD menu: | OSD menu available via DAHUA recorder |
| Main features: | <ul style="list-style-type: none">• WDR - 120 dB - Wide Dynamic Range• 2D-DNR / 3D-DNR - Digital Noise Reduction• F-DNR (Defog) - Reduction of image noise caused by precipitation• ICR - Movable InfraRed filter• BLC/HLC - Back Light / High Light Compensation• AGC - Automatic Gain Control• Motion Detection - max. 4 zones• Privacy zones - max. 8• Mirror - Mirror image• Auto White Balance |
| Power supply: | 12 V DC / 490 mA |
| Power consumption: | < 5.9 W |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|------------------------|------------------|
| Housing: | Compact, Metal |
| Color: | White |
| "Index of Protection": | IP67 |
| Operation temp: | -30 °C ... 60 °C |
| Weight: | 0.41 kg |
| Dimensions: | 180 x 70 x 70 mm |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |

PRESENTATION

Front view:




Side view:



Mounting side view:



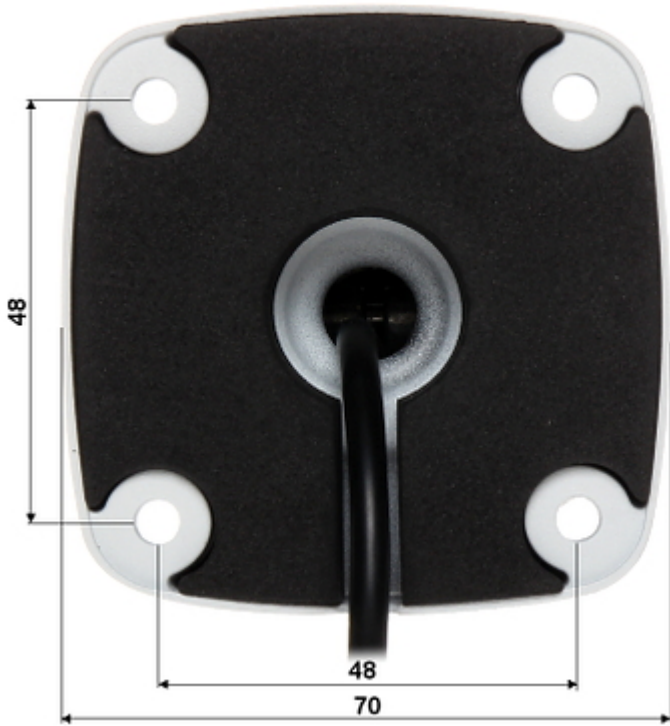

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

