

Code: GT-CI12V3-28VF

IP VANDALPROOF CAMERA **GT-CI12V3-28VF** - 720p 2.8 ... 12 mm GEMINI TECHNOLOGY

Net: **63.75 EUR** Gross: **63.75 EUR**



IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 720p.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Brigates BG0703 CMOS
Digital Image Processor:	Hisilicon 3518E V200
Matrix size:	1.0 Mpx
Resolution:	1280 x 720 - 720p 640 x 480 - VGA 640 x 360 - Q720p
Lens:	2.8 ... 12 mm
View angle:	• 102 ° ... 35 ° (manufacturer data) • 110 ° ... 33 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
Memory card slot:	—
Image compression method:	H.264
Alarm inputs / outputs:	—
Bitrate:	16 ... 8000 kbps
Main stream frame rate:	max. 25 fps - 720p
Network interface:	10/100 Base-T (RJ-45)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network protocols:	TCP, HTTP, UDP, DHCP, RTP, RTSP, DNS, DDNS, NTP, PPPoE, UPnP, SNMP, PPPoE, ONVIF
Audio:	—
Max. number of on-line users:	10
ONVIF:	2.21
RS-485 interface:	—
Mobile phones support:	Port no.: 5800 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application Fseye • iOS: Free application Fseye
Default IP address:	192.168.1.188
Default admin user / password:	admin / -
Web browser access ports:	80, 554, 1935
PC client access ports:	5050, 5051, 5052
WEB Server:	Built-in
Mobile client access ports:	5800
Port ONVIF:	80
RTSP URL:	rtsp://ip_address:554/ch01.264 - Main stream rtsp://ip_address:554/ch01_sub.264 - Sub stream
Main features:	<ul style="list-style-type: none"> • 3D-DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • ICR - Movable InfraRed filter • Possibility to change the resolution, quality and bit rate • Time mark and image description • Configurable: brightness, contrast, saturation • Day/Night mode - configurable • Possibility to add different privileges to the users • Privacy zones - max. 4 • Sharpness - sharper image outlines
Vandal-proof:	✓
Power supply:	12 V DC / 380 mA
Power consumption:	≤ 4.5 W
Housing:	Dome - Metal
Color:	Graphite
"Index of Protection":	IP66
Operation temp:	-20 °C ... 50 °C
Weight:	0.68 kg
Dimensions:	Ø 118 x 95 mm
Manufacturer / Brand:	GEMINI TECHNOLOGY
Guarantee:	2 years

PRESENTATION

Camera is out from clamping ring:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:



In the kit:




Package:



OUR TESTS


Camera image at artificial illumination (about 30Lux):

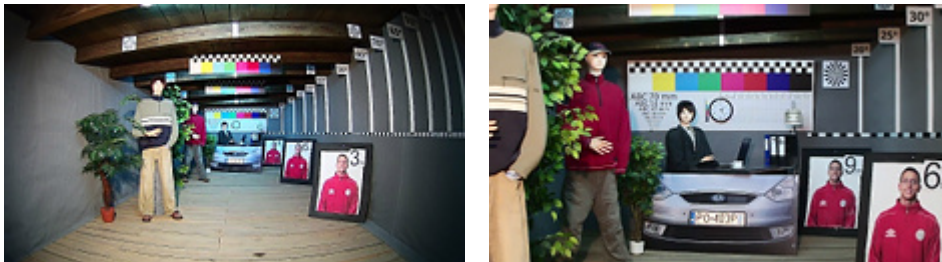

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

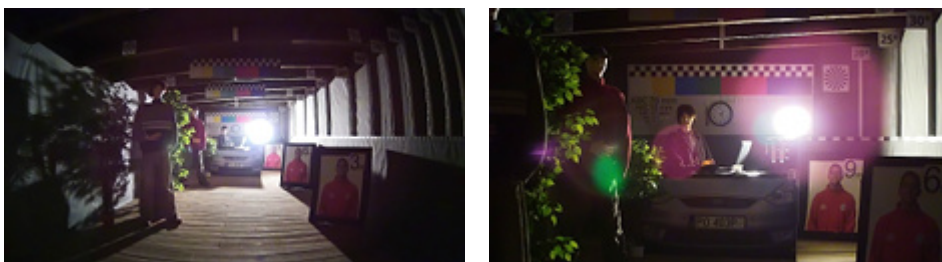

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

