

Code: APTI-AI503VA3-27135W

IP CAMERA **APTI-AI503VA3-27135W** - 5 Mpx 2.7 ... 13.5 mm MOTOZOOM

Net: **478.40 PLN** Gross: **478.40 PLN**



IP camera with efficient H.265 / H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 Mpx.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2880 x 1620 - 5 Mpx , 2592 x 1536 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	2.7 ... 13.5 mm Motozoom, AutoFocus
View angle:	• 99 ° ... 26 ° (manufacturer data) • 102 ° ... 33 ° (our tests result)
Range of IR illumination:	30 m
Memory card slot:	Micro SD memory cards up to 512GB support (possible local recording)
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Main stream frame rate:	25 fps @ 5 Mpx
Network interface:	10/100 Base-T (RJ-45)
Alarm inputs / outputs:	—
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, PPPoE, SMTP, UDP
Audio:	Microphone built-in - Audio transmission via network

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	Built-in
Max. number of on-line users:	3
ONVIF:	2.4
RS-485 interface:	—
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application BitVision • iOS (iPhone): Free application BitVision
Default IP address:	192.168.1.168
Default admin user / password:	admin / admin The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	80
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://user:password@ip_address:554/0 - Main stream rtsp://user:password@ip_address:554/1 - Sub stream
Main features:	<ul style="list-style-type: none"> • Intelligent image analysis : intrusion • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • BLC/HLC - Back Light / High Light Compensation • Possibility to change the resolution, quality and bit rate • ICR - Movable InfraRed filter • Mirror - Mirror image • Motion Detection • Privacy zones - max. 3 • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • RESET button - on the cable
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 440 mA
Power consumption:	≤ 5.3 W
Housing:	Dome - Metal
Vandal-proof:	—
Color:	White
"Index of Protection":	IP67
Operation temp:	-20 °C ... 60 °C
Weight:	0.61 kg
Dimensions:	Ø 127 x 108 mm
Supported languages:	Polish, English, Bulgarian, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Turkish, Italian
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

Side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Memory card slot and "Reset" button:



Camera is out from clamping ring:



Mounting side view:






In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):

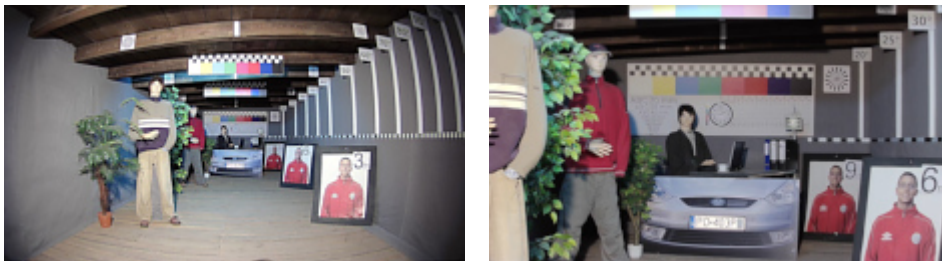


Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:

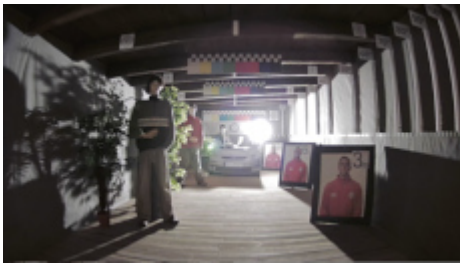

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------