

Code: APTI-32V3-2812P

IP VANDALPROOF CAMERA **APTI-32V3-2812P** - 3 Mpx 2.8 ... 12 mm

Net: **114.70 EUR** Gross: **114.70 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 2048 x 1536 (3.2 MPx). Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Digital Image Processor:	DSP AMBARELLA S2L55
Sensor:	1/2.8 " Sony CMOS IMX124
Matrix size:	3.2 Mpx
Resolution:	2048 x 1536 - 3 Mpx , 1920 x 1080 - 1080p ,
Lens:	2.8 ... 12 mm, 5 Mpx
View angle:	<ul style="list-style-type: none">• 85 ° ... 23 ° (manufacturer data)• 86 ° ... 35 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
Memory card slot:	—
Image compression method:	H.264
Bitrate:	64 ... 12000 kbps
Main stream frame rate:	max. 30 fps - 2048 x 1536 px
Network interface:	10/100 Base-T (RJ-45)
Alarm inputs / outputs:	—
Network protocols:	RTSP, PPPOE, DHCP, DDNS, NTP, UPnP, TCP
Audio:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	Built-in
Max. number of on-line users:	3
ONVIF:	2.4
RS-485 interface:	—
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application FREEIP • iOS (iPhone): Free application FREEIP
Default admin user / password:	admin / admin
Default IP address:	192.168.1.168
Web browser access ports:	80
PC client access ports:	80
Mobile client access ports:	80
Port ONVIF:	80
RTSP URL:	rtsp://user:password@ip_address:80/0 - Main stream rtsp://user:password@ip_address:80/1 - Sub stream
Main features:	<ul style="list-style-type: none"> • ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • Possibility to change the resolution, quality and bit rate • Motion Detection • Privacy zones • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • Mirror - Mirror image
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af) • 12 V DC / 490 mA
Power consumption:	< 6 W
Housing:	Dome - Metal
Vandal-proof:	✓
Color:	Graphite
"Index of Protection":	IP66
Operation temp:	-20 °C ... 55 °C
Weight:	0.634 kg
Dimensions:	Ø 120 x 95 mm
Supported languages:	English, Bulgarian, Chinese, French, Spanish, Dutch, Japanese, Korean, German, Polish, Portuguese, Russian, Turkish, Italian
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

Camera view after remove the Dome cover - camera lens adjustment knobs are visible:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


PoE:



Dimensions:



Mounting side view:

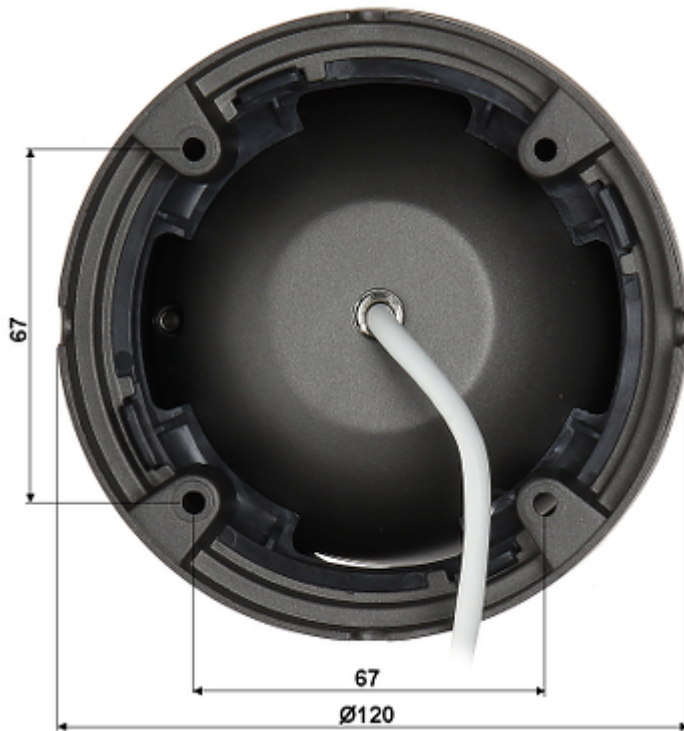

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------