

Code: BCS-L-TIP12FR3

IP CAMERA **BCS-L-TIP12FR3** - 1080p 2.8 mm BCS Line

Net: **111.33 EUR** Gross: **111.33 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1920 x 1080 (1080p).

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



SPECIFICATION

Standard:	IP
Resolution:	1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Sensor:	1/2.8 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	102 °
Range of IR illumination:	30 m
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	—
Main stream frame rate:	25 fps @ 1080p
Interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
ONVIF:	✓
Main features:	• D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • BLC/HLC - Back Light / High Light Compensation • Mirror - Mirror image • Day/night mode • ICR - Movable InfraRed filter • Auto White Balance • AGC - Automatic Gain Control • Motion Detection - max. 4 configurable zones • Privacy zones - max. 4

Mobile phones support:	Access by a cloud (P2P) • Android: Free application BCS Manager • iOS (iPhone): Free application BCS Manager
Access from PC:	Port no.: 37777 or access by a cloud (P2P) - PC: Free application BCS Manager
Default IP address:	DHCP
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Power supply:	• PoE (802.3af), • 12 V DC / 460 mA
Power consumption:	< 5.5 W
Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP67
Mechanical protection class:	—
Operation temp:	-40 °C ... 60 °C
Weight:	0.44 kg
Dimensions:	Ø 74 x 156 mm
Supported languages:	Polish, English, Czech
Manufacturer / Brand:	BCS Line
Guarantee:	3 years

PRESENTATION

Front view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:



Camera mounting side view:

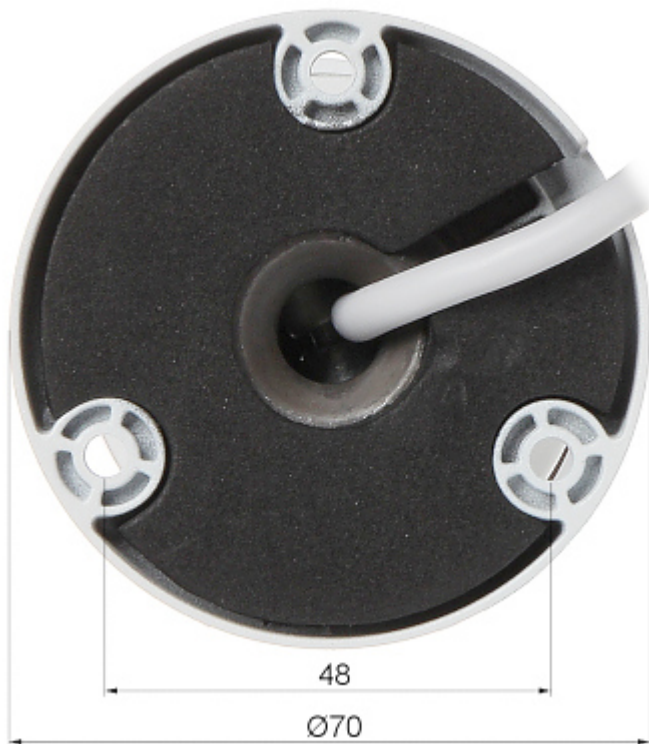

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

