

Code: DS-2CD4A25FWD-IZHS(2.8-12MM)

IP CAMERA **DS-2CD4A25FWD-IZHS(2.8-12MM)** - 1080p Hikvision

Net: **820.90 EUR** Gross: **820.90 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1920 x 1080 (1080p).

The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment.

Cameras from the "Lightfighter" series even with strong illumination of the scene allow you to get a clear color image. PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	2.8 ... 12 mm - Motozoom
View angle:	113 ° ... 34 °
Range of IR illumination:	50 m
S/N ratio:	> 50 dB (AGC off)
Compression:	H.264 / H.264+ / MJPEG
Main stream frame rate:	50 fps - 1080p
Network interface:	10/100/1000 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, Bonjour
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	2.4
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• External microphone input• Audio output• Audio detection
RS-485 interface:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application iVMS-4500 or Hik-Connect • iOS (iPhone): Free application iVMS-4500, or Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / -
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> • Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
Main features:	<ul style="list-style-type: none"> • Motozoom lens - Control from a Web browser • WDR - 140 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • Intelligent image analysis : crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, abandoned/missing object, face detection, people counting, • ICR - Movable InfraRed filter • BLC - Back Light Compensation • Video output : CVBS - BNC socket • Day/night mode • Cameras from the "Lightfighter" series even with strong illumination of the scene allow you to get a clear color image • The device has a built-in heater
Power supply:	<ul style="list-style-type: none"> • PoE (802.3at), • 12 V DC / 1.25 A
Power consumption:	≤ 15 W
Housing:	Compact, Metal / Plastic
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-40 °C ... 60 °C
Weight:	2.0 kg
Dimensions:	312 x 104 x 100 mm
Supported languages:	English
Manufacturer / Brand:	Hikvision
SAP Code:	300707768
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:




Bottom view:



Mounting side view:

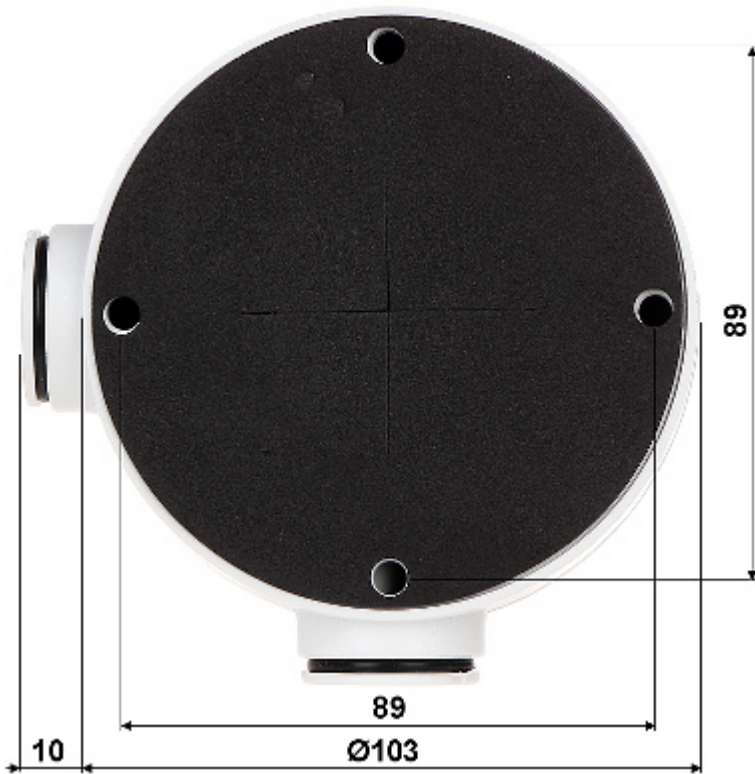

Camera dimensions:

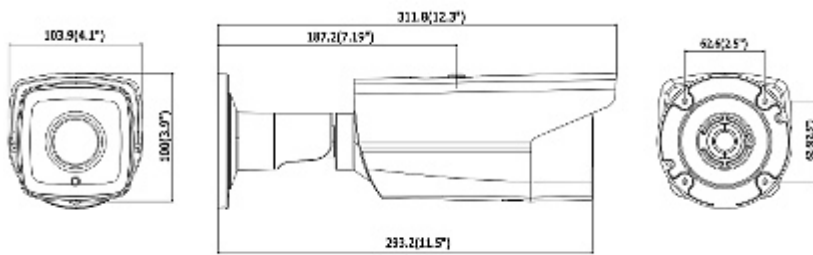

In the kit:



OUR OPINIONS



- Motozoom lens.

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

