

Code: DS-2CD2620F-I(2.8-12mm)(D)

IP CAMERA **DS-2CD2620F-I(2.8-12mm)(D)** - 1080p Hikvision

Net: **219.57 EUR** Gross: **219.57 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. The DS-2CD2620F-I camera comes from a new series of Hikvision products - HiWatch. This series of low-budget devices, IP cameras and IP NVRs, is dedicated for anyone who wants to build low-cost high-resolution IP CCTV system.

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	2.8 ... 12 mm, 2 Mpx
View angle:	<ul style="list-style-type: none">• 91.2 ° ... 28.3 ° (manufacturer data)• 95 ° ... 35 ° (our tests result)
S/N ratio:	> 50 dB (AGC off)
Range of IR illumination:	30 m
Image compression method:	H.264 / MJPEG
Bitrate:	32 ... 16384 kbps
Main stream frame rate:	25 fps @ 1920 x 1080
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6, Bonjour
WEB Server:	Built-in
Max. number of on-line users:	6
ONVIF:	✓
Memory card slot:	Micro SD memory cards up to 64GB support (possible local recording)
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application iVMS-4500• iOS (iPhone): Free application iVMS-4500

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

RS-485 interface:	—
Alarm inputs / outputs:	—
Main features:	<ul style="list-style-type: none"> • Day/night mode • ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • D-WDR - Wide Dynamic Range • BLC - configurable Back Light Compensation • Motion Detection • Intelligent Image Analysis - detection line violation and intrusion in an area previously designated • Tamper signaling
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af) • 12 V DC / 380 mA
Housing:	Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-30 °C ... 60 °C
Weight:	0.820 kg
Dimensions:	Ø 105 x 259 mm
Manufacturer / Brand:	Hikvision
SAP Code:	300723669
Country of origin:	China
Guarantee:	3 years

PRESENTATION

Front view:



Camera view after remove the Dome cover:



Side view:



Rear view:



Mounting dimensions:




In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):

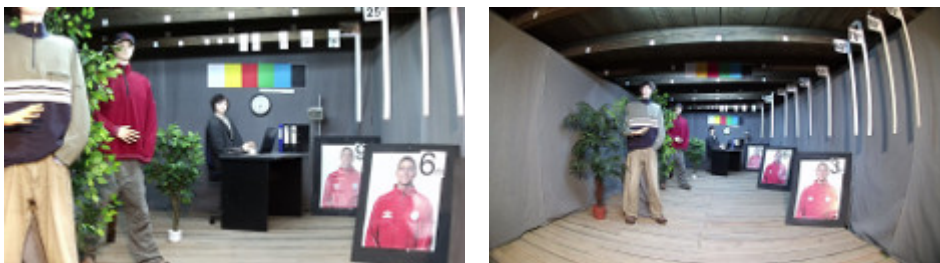


Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:

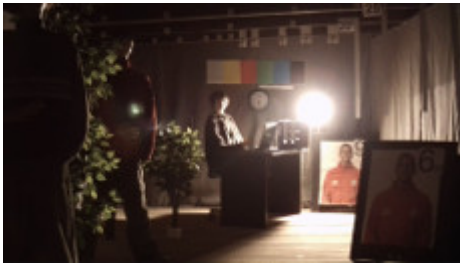

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

