

Code: BCS-V-TIP45VSR5

IP CAMERA **BCS-V-TIP45VSR5** - 5 Mpx 2.8 ... 12 mm - MOTOZOOM BCS View

Net: **1 350.00 PLN** Gross: **1 350.00 PLN**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 5 MPx. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Thanks to the "DarkView Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2560 x 1920 - 5 Mpx , 2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p 1280 x 720 - 720p
Lens:	2.8 ... 12 mm - Motozoom
View angle:	97 ° ... 30 °
Compression:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Range of IR illumination:	50 m
Audio:	—
Alarm inputs / outputs:	—
Main stream frame rate:	• 20 fps - 5 Mpx • 25 fps - 3.7 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv4, IPv6, Bonjour, UDP, SSL / TLS
WEB Server:	Built-in
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Max. number of on-line users:	6
ONVIF:	✓
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application BCS Manager • iOS (iPhone): Free application BCS Manager
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P)
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	• Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ • Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/
Main features:	• WDR - 120 dB - Wide Dynamic Range • ROI - improve the quality of selected parts of image • 3D-DNR - Digital Noise Reduction • AGC - Automatic Gain Control • Auto White Balance • ICR - Movable InfraRed filter • BLC - configurable Back Light Compensation • Day/Night mode (color/b&w/auto) • Motion Detection • Configurable Privacy Zones • Mirror - Mirror image • Sharpness - sharper image outlines
Power supply:	• PoE (802.3af), • 12 V DC / 915 mA
Power consumption:	• ≤ 12.9 W @ PoE (802.3at) • ≤ 11 W @ 12 V DC
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Operation temp:	-30 °C ... 60 °C
Supported languages:	Polish, English
Weight:	0.75 kg
Dimensions:	Ø 105 x 244 mm
Manufacturer / Brand:	BCS View
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Camera view after remove the Dome cover:




Memory card slot:



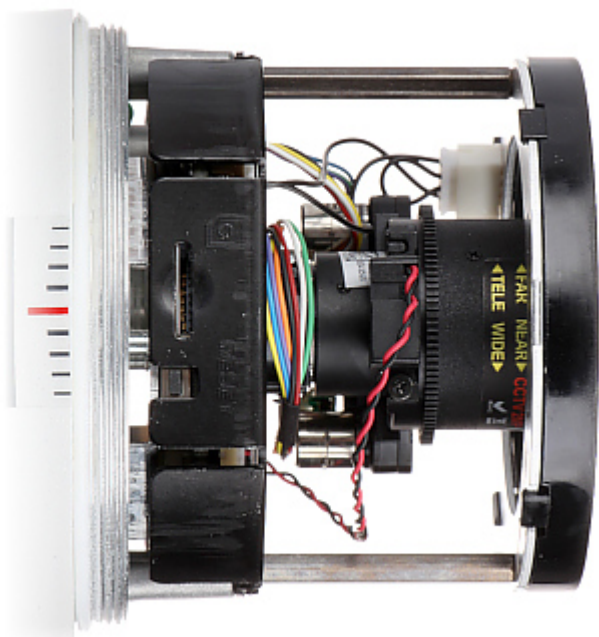

Mounting side view:

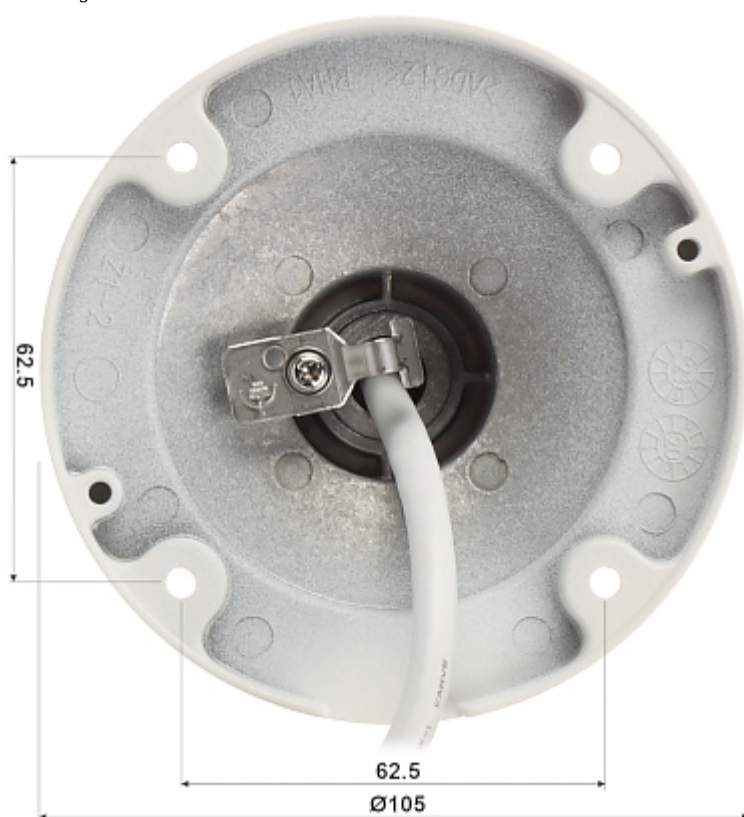

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

