

Code: APTI-H10C6-2812

## AHD, HD-CVI, HD-TVI, PAL CAMERA **APTI-H10C6-2812** - 720p 2.8 ... 12 mm

Net: **37.80 EUR** Gross: **37.80 EUR**

Megapixel camera with 1/4" CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 720p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Setting the camera in PAL mode allows to obtain an image in 960H resolution. The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD/HD-CVI/HD-TVI recorder.



### SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, PAL
Sensor:	1/4 " OmniVision OV9732 CMOS
Digital Image Processor:	HTC960E
Matrix size:	1.0 Mpx
Resolution:	1280 x 720 - 720p, AHD-M, HD-CVI, HD-TVI , 960 x 576 - 960H, PAL
Range of IR illumination:	60 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 ... 12 mm, 2 Mpx
View angle:	• 65 ° ... 21 ° (manufacturer data) • 50 ° ... 24 ° (our tests result)
S/N ratio:	> 48 dB
Video output:	1 Vpp 75 Ω, AHD / HD-CVI / HD-TVI / PAL - selectable by switch
Main features:	• D-WDR - Wide Dynamic Range • DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines
OSD menu:	✓
"Index of Protection":	IP66
Power supply:	12 V DC / 420 mA
Power consumption:	≤ 5 W
Housing:	Compact - Metal
Color:	Graphite

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Operation temp:	-20 °C ... 50 °C
Weight:	0.65 kg
Dimensions:	291 x 90 x 93 mm
Supported languages:	English, Chinese Traditional, Chinese Simplified, French, Greek, Spanish, Korean, Portuguese, Russian, Italian
Manufacturer / Brand:	APTI
Guarantee:	2 years

## PRESENTATION

Front view:



Side view:



Bottom view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Mounting side view:




The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder:



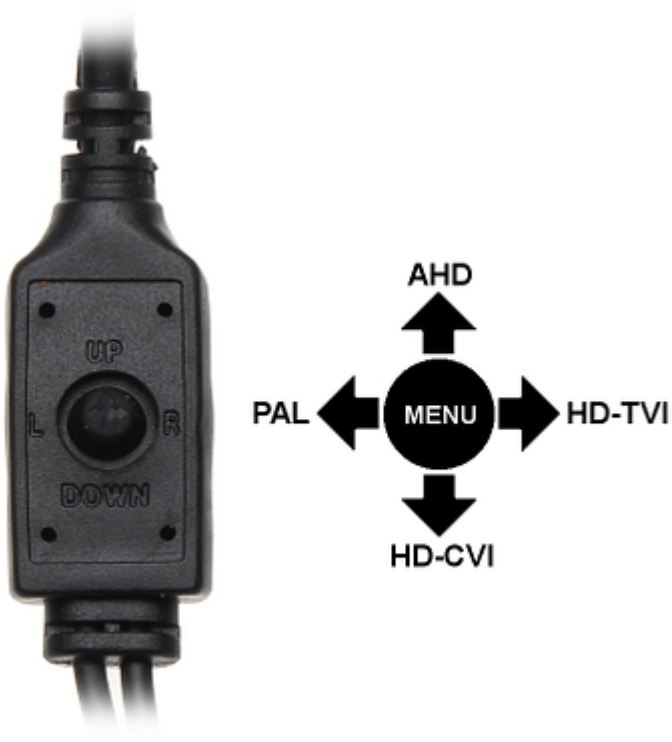

In the kit:

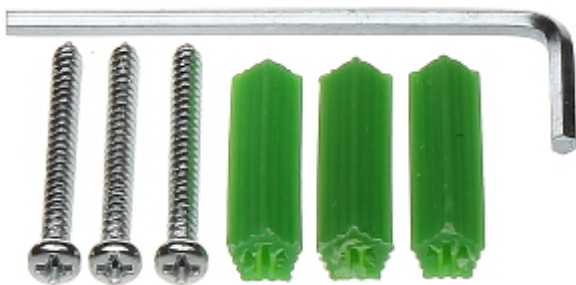

**OUR TESTS**

AHD:

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:

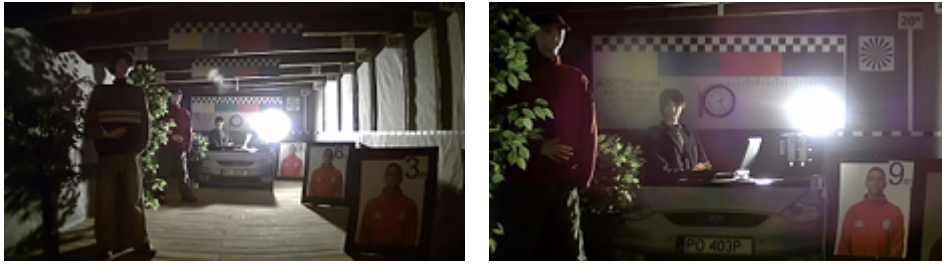

HD-CVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:

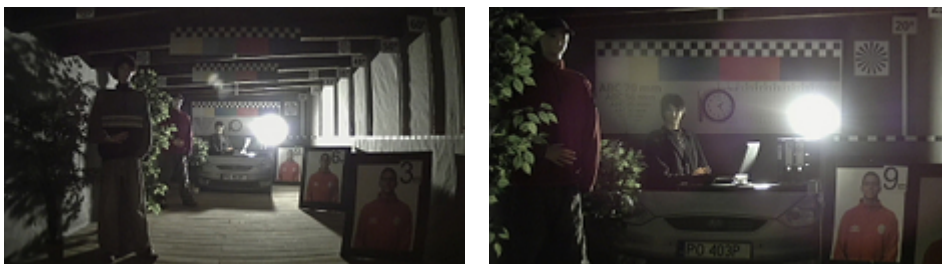

HD-TVI:

Camera image at artificial illumination (about 30Lux):

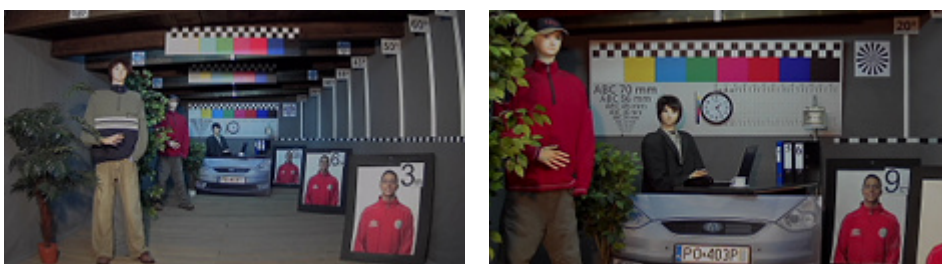

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------