

Code: DS-2CE19D0T-VFIT3F(2.7-13.5MM)(C)

AHD, HD-CVI, HD-TVI, PAL CAMERA **DS-2CE19D0T-VFIT3F(2.7-13.5MM)(C)** - 1080p 2.7 ... 13.5 mm Hikvision

Net: **425.00 PLN** Gross: **425.00 PLN**

Megapixel camera with Progressive scan CMOS sensor and AHD / HD-CVI / HD-TVI / PAL.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K UHD) resolution. During transmission there are no delays and is maintained the original, high quality image.

The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds. Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	AHD / HD-CVI / HD-TVI / PAL
Sensor:	Progressive Scan CMOS
Matrix size:	2 Mpx
Resolution:	• 1920 x 1080 - 1080p @ AHD / HD-CVI / HD-TVI @ 25 fps • 960 x 576 - 960H @ PAL
Video output:	AHD / HD-CVI / HD-TVI / CVBS, 1 Vpp / 75 Ω
Lens:	2.7 ... 13.5 mm
View angle:	100 ° ... 30 °
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Audio:	—
Main features:	• D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • AGC - Automatic Gain Control • ICR - Movable InfraRed filter • Auto White Balance • Mirror - Mirror image • Sharpness - sharper image outlines
Power supply:	• 12 V DC ± 15 % / 420 mA
Power consumption:	≤ 5 W
Housing:	Compact, Metal + Plastic
Color:	White

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.57 kg
Dimensions:	255 x 85 x 92 mm
SAP Code:	300513634
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

PRESENTATION

Front view:



Side view:



On the bottom of the camera there are two lens adjustment knobs (zoom, focus):



Mounting side view:



The change of the AHD / HD-CVI / HD-TVI / PAL standard is done with the corresponding button by keeping it pressed for approx. 5 seconds:



In the kit:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



OUR TESTS

AHD:



Camera image at artificial illumination (about 30Lux):

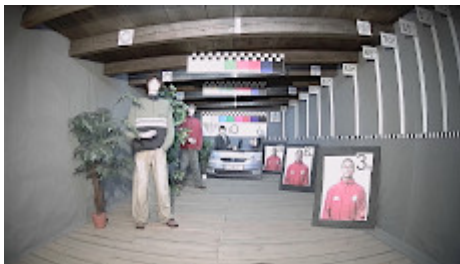

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

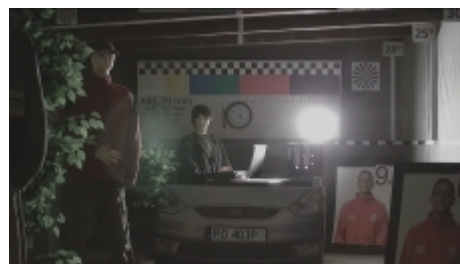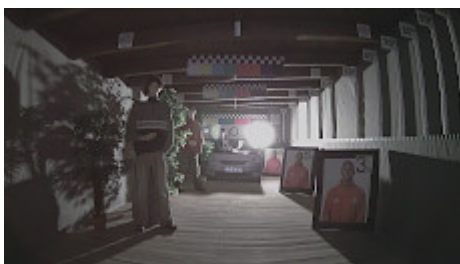

HD-CVI:

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:




Camera image at direct strong light opposite to camera:



HD-TVI:

Camera image at artificial illumination (about 30Lux):

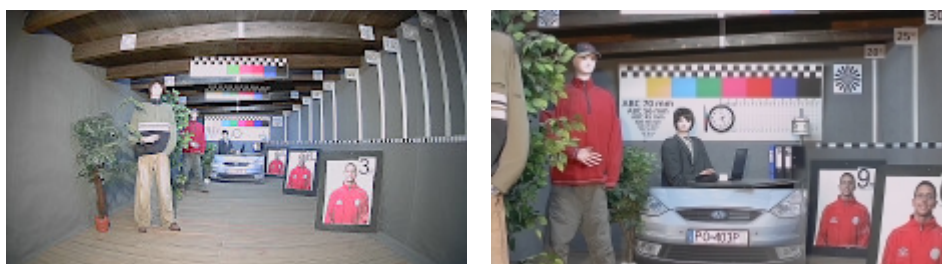

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

