

Code: APTI-H50C61-2812W

# AHD, HD-CVI, HD-TVI CAMERA **APTI-H50C61-2812W** 2Mpx / 5Mpx 2.8 ... 12 mm

Net: **56.13 EUR** Gross: **56.13 EUR**

Megapixel camera with 1/2.7" CMOS sensor and AHD / HD-CVI / HD-TVI.

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in max. 8 Mpx (4K) resolution. During transmission there are no delays and is maintained the original, high quality image.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance). Camera is according to IP66 Index of Protection norm.

**Attention!** The camera is factory set to the resolution 2 Mpx (1080p). It does not have CVBS (PAL) mode.



## SPECIFICATION

|                                  |                                                                                                                                                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                        | AHD, HD-CVI, HD-TVI                                                                                                                                                                                                                     |
| Sensor:                          | 1/2.7 " Progressive Scan CMOS                                                                                                                                                                                                           |
| Matrix size:                     | 5 Mpx                                                                                                                                                                                                                                   |
| Resolution:                      | 2592 x 1944 - 5 Mpx @ AHD / HD-TVI @ 20 fps, 12.5 fps ,<br>2560 x 1440 - 4 Mpx @ AHD / HD-CVI / HD-TVI @ 25 fps, 30 fps ,<br>1920 x 1080 - 1080p @ AHD / HD-CVI / HD-TVI                                                                |
| Range of IR illumination:        | 60 m                                                                                                                                                                                                                                    |
| IR illuminator power adjustment: | Automatic                                                                                                                                                                                                                               |
| Lens:                            | 2.8 ... 12 mm                                                                                                                                                                                                                           |
| View angle:                      | • 95 ° ... 30 ° (manufacturer data)<br>• 87 ° ... 33 ° (our tests result)                                                                                                                                                               |
| S/N ratio:                       | > 50 dB                                                                                                                                                                                                                                 |
| Video output:                    | 1 Vpp 75 Ω, AHD / HD-CVI / HD-TVI - Via OSD, selectable by switch                                                                                                                                                                       |
| Main features:                   | • D-WDR - Wide Dynamic Range<br>• DNR - Digital Noise Reduction<br>• ICR - Movable InfraRed filter<br>• AGC - Automatic Gain Control<br>• Auto White Balance<br>• Day/Night mode - configurable<br>• Sharpness - sharper image outlines |
| OSD menu:                        | ✓                                                                                                                                                                                                                                       |
| Power supply:                    | 12 V DC / 410 mA                                                                                                                                                                                                                        |
| Power consumption:               | ≤ 4.9 W                                                                                                                                                                                                                                 |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                        |                                                                |
|------------------------|----------------------------------------------------------------|
| Housing:               | Compact - Metal                                                |
| Color:                 | White                                                          |
| "Index of Protection": | IP66                                                           |
| Operation temp:        | -20 °C ... 60 °C                                               |
| Weight:                | 0.68 kg                                                        |
| Dimensions:            | 210 x 88 x 84 mm                                               |
| Supported languages:   | Polish, English, French, Spanish, Portuguese, Russian, Italian |
| Manufacturer / Brand:  | APTI                                                           |
| Guarantee:             | 2 years                                                        |

## PRESENTATION

Front view:



Side view:




Bottom view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Mounting side view:

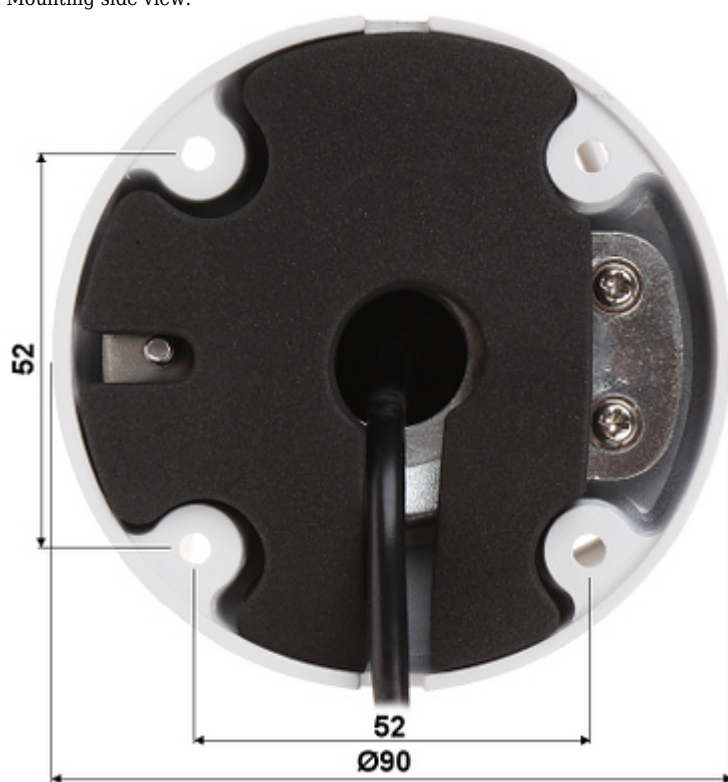

The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder:

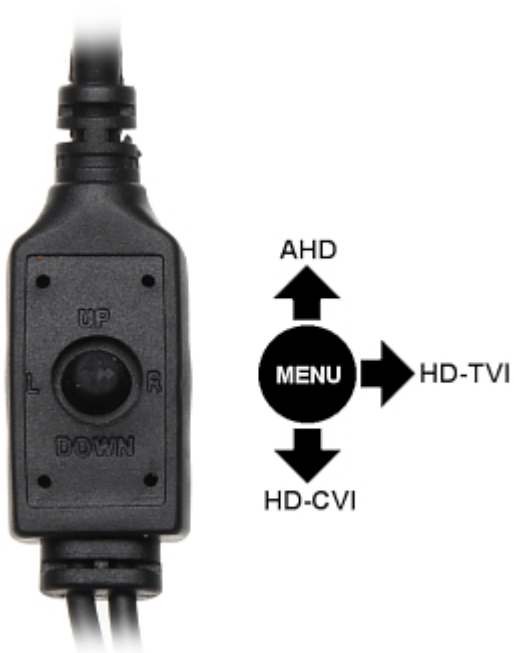


In the kit:



## OUR TESTS

AHD:

Camera image at artificial illumination (about 30Lux):

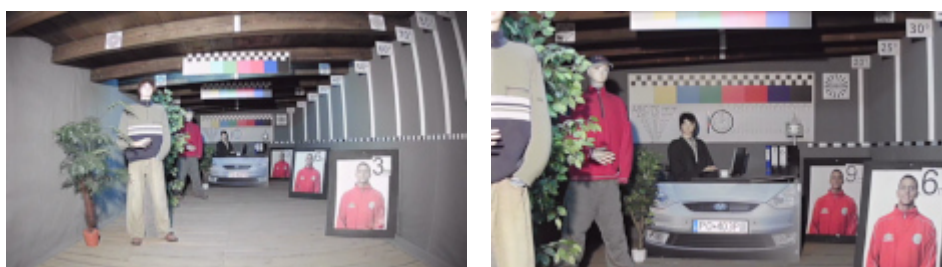

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



HD-CVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

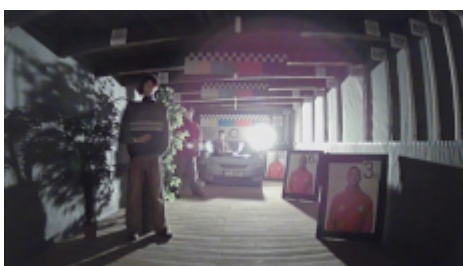

HD-TVI:


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

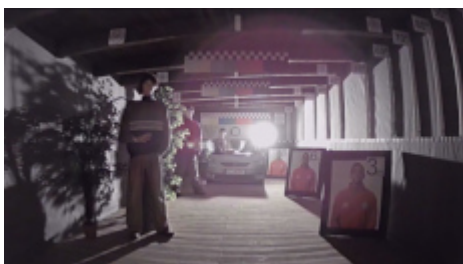

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60